

## C. 34 Blackberry Dr - Exterior Elevations - 20-788

### Front Elevation Alterations:

1. Gable over 6' wide window on left of house to match/balance gable on dormer over garage
2. Remove Shingled "shelf" over (3) windows in main front gable and provide short returns on each side of gable (to allow monolithic look of shake)
3. Add small window in attic area of gable
4. Add 4 small awnings with same standing seam metal roof as porch over 3 exist windows and the 1 new window in Gable

15 None Assigned

### 3 Lifestyle, Sash Set Fixed, Without HGP, White

| Item Price | Qty | Ext'd Price |
|------------|-----|-------------|
| \$500.00   | 1   | \$500.00    |



PK #  
2067

Viewed From Exterior

**1: Size Fixed Sash Set**  
**General Information:** No Package, Without Hinged Glass Panel, Clad, Pine, 5", 3 11/16", No Certification  
**Exterior Color / Finish:** Standard Enduraclad, White  
**Interior Color / Finish:** Prefinished White Paint Interior  
**Glass:** Insulated Low-E Advanced Low-E Insulating Glass Argon Non High Altitude  
**Performance Information:** U-Factor 0.28, SHGC 0.28, VLT 0.52, CPD PEL-N-22-00656-00002, Performance Class LC, PG 50, Calculated Positive DP Rating 50, Calculated Negative DP Rating 50, Year Rated 11  
**Grille:** GBG, No Custom Grille, 3/4" Contour, Traditional (3W3H), White, White



PROPOSED




EXISTING

## 34 Blackberry Dr - Exterior Elevations - 20-788

Left Side Elevation Alterations:

5. Remove Shingled "shelf" over (2) windows in side gable over porch and provide a short return on right side (only) of gable (to allow monolithic look of shake)
6. Add 2 small awnings with same standing seam metal roof as porch over 2 exist windows

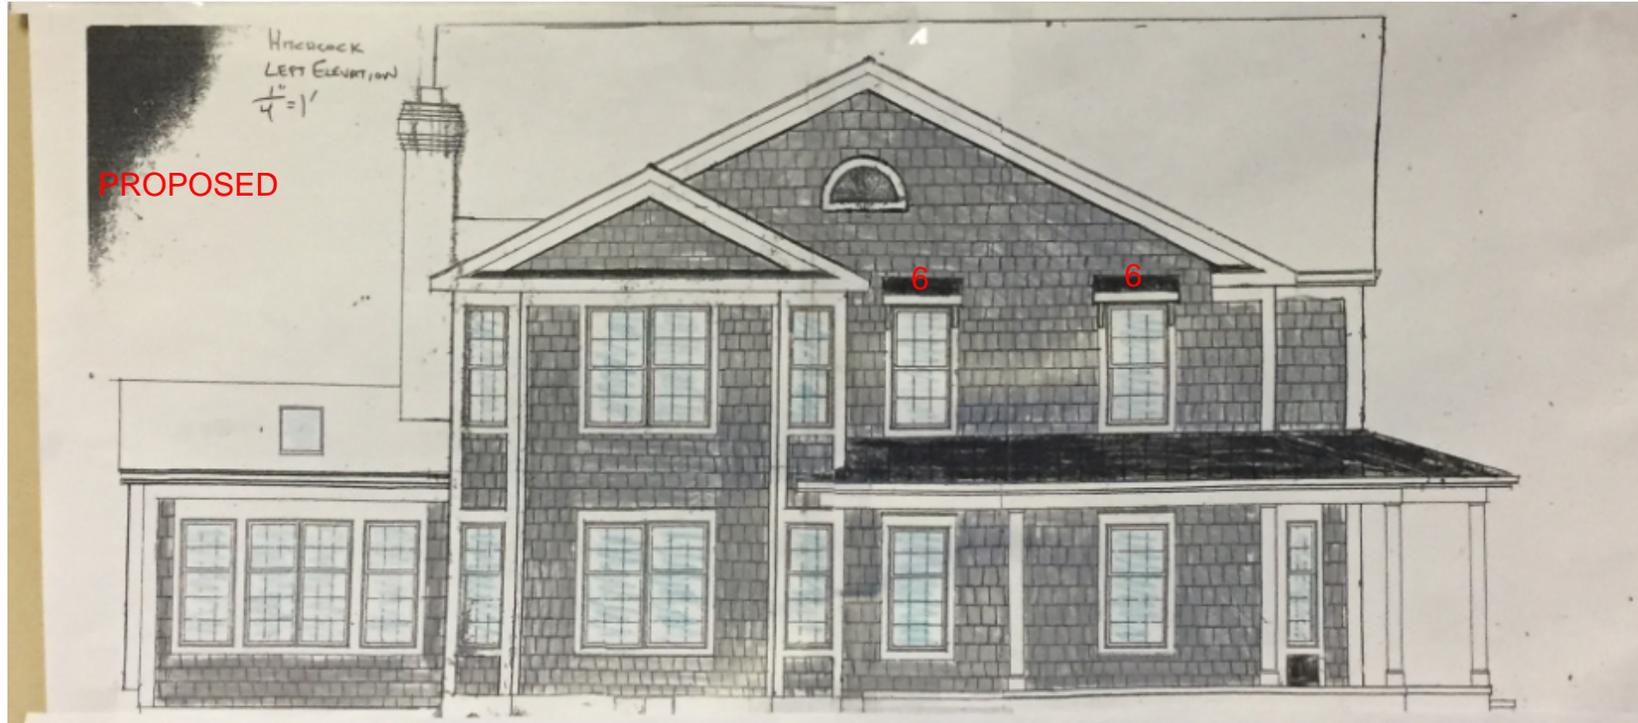


34 Blackberry Dr - Exterior Elevations - 20-788

Rear Elevation Alterations

7. Remove Shingled "shelf" over (3) side by side windows in vaulted sunroom and provide short returns on each side of gable to allow height for palladium window.

8. New window with palladium added in sun room as shown

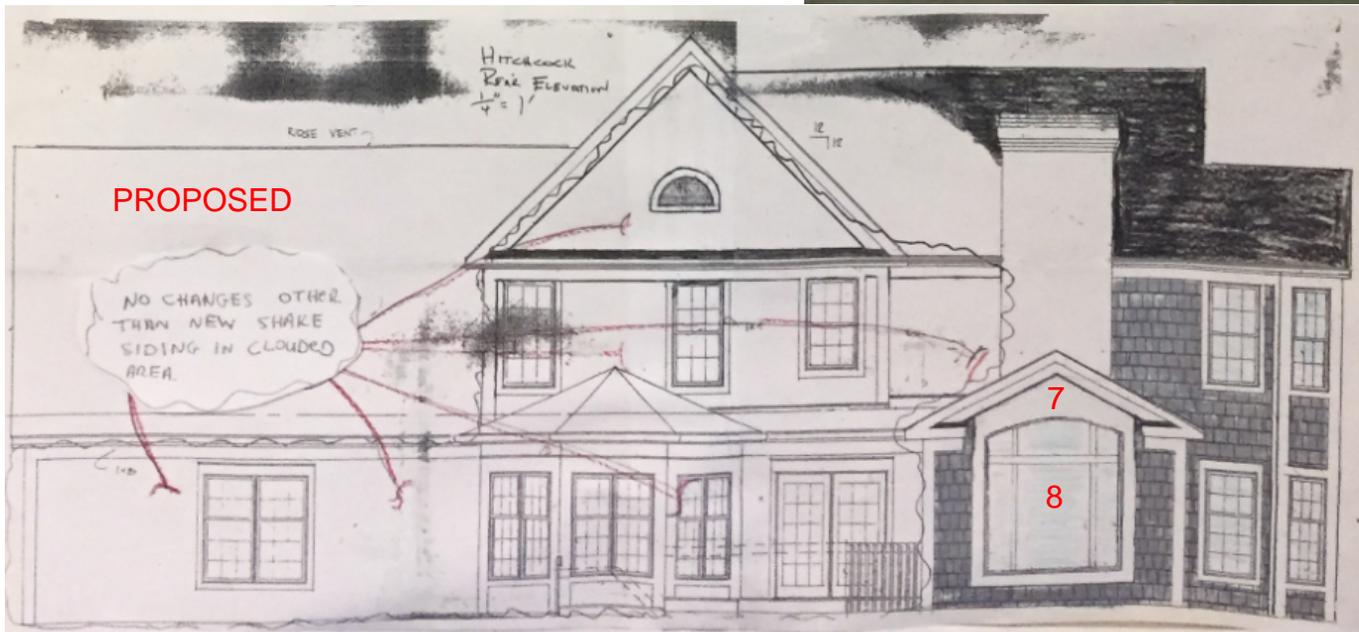

## A. 34 Blackberry Dr - Exterior Elevations - 20-788

A. Shake Shingle Siding on all 4 exterior elevations (Grade AA precoated (2 coats PPG) cedar from Waska, OR James Hardie fiber cement shake, OR vinyl (Alside) - (quotes are in process on all 3) – same color as current house) - Specs on each of the (3) options are included and choice will be largely based on quotes but preference is 1) Wood (Waska), 2) Cement Board (James Hardie), 3) Vinyl (Alside)


**EXTRA  
GRADE A\*** 

*Blue label*

- No imperfections (clear wood, no knots)
- Optimum durability and resistance
- Light color

- Exterior Siding
- Roofing
- Harsh climate

**A\***

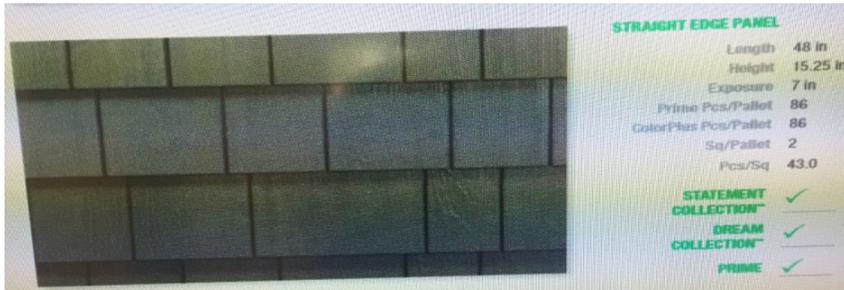

|                    |                             |
|--------------------|-----------------------------|
| Profile            | Cape Cod Shingle            |
| Exposure           | Double 5"                   |
| Texture(s)         | Natural cedar grain         |
| Exclusive Features | Extended 5' 5" panel length |
| Color(s)           | 26                          |




Cape Cod Shingle

# STANDINGSEAM

**APEX**  
METAL SOLUTIONS

## B. 34 Blackberry Dr - Exterior Elevations - 20-788

B. Metal Standing Seam Roof (Charcoal Grey) on entire wrap around front porch by Apex Metal Solutions

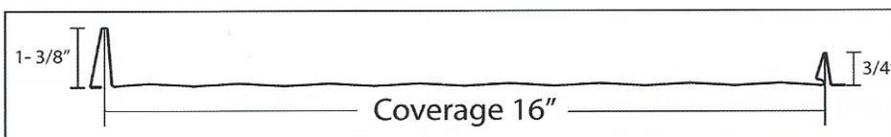

## Description

Standing seam roofing panels have been used on traditional and contemporary homes for more than a century. Their clean, graceful lines have been an enduring favorite on a wide range of architecture. Apex Standing Seam is a premium standing seam panel that is designed for distinctive, high-end looks. It's popular in up-scale residential and commercial applications. Apex Standing Seam panels snap securely together with completely concealed fasteners for maximum wind and weather resistance.

## Gauges

- 26, 24

## Finish Options

- 24 ga panels use PVDF (Kynar) paints
- 26 ga panels use Siliconized Modified Polyester paints
- Energy Star Certified Colors Available
- Unpainted Galvalume®

## Approvals and Certifications

- Metal Construction Association Certified
- Miami-Dade Approved for Wind Uplift
- Florida Building Code Approved
- Energy Star Certified
- Texas Department of Insurance Approved
- Highest UL Ratings for Wind Uplift, Fire and Impact Resistance




For more information, call 330-827-9000  
Or visit our website at [www.norcomroofing.vpweb.com](http://www.norcomroofing.vpweb.com)

| Line # | Location: | Attributes |
|--------|-----------|------------|
|--------|-----------|------------|

| Line # | Location:     | Attributes   | Item Price | Qty | Ext'd Price |
|--------|---------------|--|------------|-----|-------------|
| 20     | None Assigned | <b>Support Product, 3-Wide Direct Set, Support Product, 3-Wide Direct Set, White</b> | \$8,216.06 | 1   | \$8,216.06  |

8

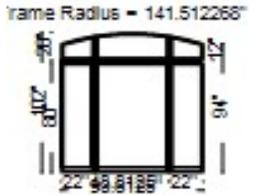

PK #  
2067

Viewed From Exterior

**1: Fixed Frame**  
**General Information:** Interior Glazed, Factory Assembled, Standard, Clad, Pine, 5", 3 11/16", No Certification  
**Exterior Color / Finish:** Painted, Standard Enduraclad, White  
**Interior Color / Finish:** Prefinished White Paint Interior  
**Glass:** Insulated Dual Low-E Advanced Low-E Insulating Glass Argon Non High Altitude  
**Performance Information:** U-Factor 0.29, SHGC 0.32, VLT 0.62, CPD PEL-N-18-02773-00001, Performance Class CW, PG 50, Calculated Positive DP Rating 50, Calculated Negative DP Rating 50, Year Rated 08|11  
**Grille:** No Grille,  
**Vertical Mull 1:** FactoryMull, 1/2" mullion for 3-9/16", Mull Design Pressure- 20

**2: Fixed Frame**  
**General Information:** Interior Glazed, Factory Assembled, Standard, Clad, Pine, 5", 3 11/16", No Certification  
**Exterior Color / Finish:** Painted, Standard Enduraclad, White  
**Interior Color / Finish:** Prefinished White Paint Interior  
**Glass:** Insulated Dual Low-E Advanced Low-E Insulating Glass Argon Non High Altitude  
**Performance Information:** U-Factor 0.27, SHGC 0.32, VLT 0.61, CPD PEL-N-18-02796-00001, Performance Class CW, PG 45, Calculated Positive DP Rating 45, Calculated Negative DP Rating 45, Year Rated 08|11  
**Grille:** No Grille,  
**Vertical Mull 2:** FactoryMull, 1/2" mullion for 3-9/16", Mull Design Pressure- 20

**3: Fixed Frame**  
**General Information:** Interior Glazed, Factory Assembled, Standard, Clad, Pine, 5", 3 11/16", No Certification  
**Exterior Color / Finish:** Painted, Standard Enduraclad, White  
**Interior Color / Finish:** Prefinished White Paint Interior  
**Glass:** Insulated Dual Low-E Advanced Low-E Insulating Glass Argon Non High Altitude  
**Performance Information:** U-Factor 0.29, SHGC 0.32, VLT 0.62, CPD PEL-N-18-02773-00001, Performance Class CW, PG 50, Calculated Positive DP Rating 50, Calculated Negative DP Rating 50, Year Rated 08|11  
**Grille:** No Grille,  
**Horizontal Mull 1:** FactoryMull, 2" x 4 3/8" Wood, Mull Design Pressure- 20

**4: Fixed Frame Circle Head Partial Arch Head, Facing**  
**General Information:** Standard, Clad, Pine, 5", 3 11/16", No Certification  
**Exterior Color / Finish:** Painted, Standard Enduraclad, White  
**Interior Color / Finish:** Prefinished White Paint Interior  
**Glass:** Insulated Dual Low-E Advanced Low-E Insulating Glass Argon Non High Altitude  
**Performance Information:** U-Factor 0.29, SHGC 0.32, VLT 0.62, CPD PEL-N-18-02773-00001, Performance Class CW, PG 90, Calculated Positive DP Rating 90, Calculated Negative DP Rating 90, Year Rated 08|11  
**Grille:** No Grille,  
**Vertical Mull 3:** FactoryMull, 1/2" mullion for 3-9/16", Mull Design Pressure- 20

**5: Fixed Frame Circle Head Arch Head**  
**General Information:** Standard, Clad, Pine, 5", 3 11/16", No Certification  
**Exterior Color / Finish:** Painted, Standard Enduraclad, White  
**Interior Color / Finish:** Prefinished White Paint Interior  
**Glass:** Insulated Dual Low-E Advanced Low-E Insulating Glass Argon Non High Altitude  
**Performance Information:** U-Factor 0.29, SHGC 0.32, VLT 0.62, CPD PEL-N-18-02773-00001, Performance Class CW, PG 85, Calculated Positive DP Rating 85, Calculated Negative DP Rating 85, Year Rated 08|11  
**Grille:** No Grille,  
**Vertical Mull 4:** FactoryMull, 1/2" mullion for 3-9/16", Mull Design Pressure- 20

**6: Fixed Frame Circle Head Partial Arch Head, Facing**  
**General Information:** Standard, Clad, Pine, 5", 3 11/16", No Certification  
**Exterior Color / Finish:** Painted, Standard Enduraclad, White  
**Interior Color / Finish:** Prefinished White Paint Interior  
**Glass:** Insulated Dual Low-E Advanced Low-E Insulating Glass Argon Non High Altitude  
**Performance Information:** U-Factor 0.29, SHGC 0.32, VLT 0.62, CPD PEL-N-18-02773-00001, Performance Class CW, PG 90, Calculated Positive DP Rating 90, Calculated Negative DP Rating 90, Year Rated 08|11

For more information regarding the finishing, maintenance, service and warranty of all Pella® products, visit the Pella® website at [www.pella.com](http://www.pella.com)

34 Blackberry Dr - Exterior Elevations - 20-788

No sketch is included for the Right Side Elevation (no changes to this side other than shake siding).

