

**Kaczmar architects incorporated**  
 1468 West 9th Street #400  
 Cleveland, OH 44113  
 P:216.687.1555 F:216.687.1558



**Project Consultants:**  
 Civil Engineer:  
**Wohlwend Engineering Group**  
 4216 Karg Industrial Parkway  
 Tallmadge, OH 44240  
 P:(330) 673.2400

Landscape Architect:  
**James S. McKnight**  
 P.O. Box 14158  
 P:(216) 952.2408

Structural Engineer:  
**Thorson Baker & Assoc.**  
 3030 West Streetsboro Rd.  
 Richfield, OH 44286  
 P:(330) 659.6688




**Seton Catholic School  
 Site Improvements**  
 6923 STOW ROAD  
 HUDSON, OHIO 44236

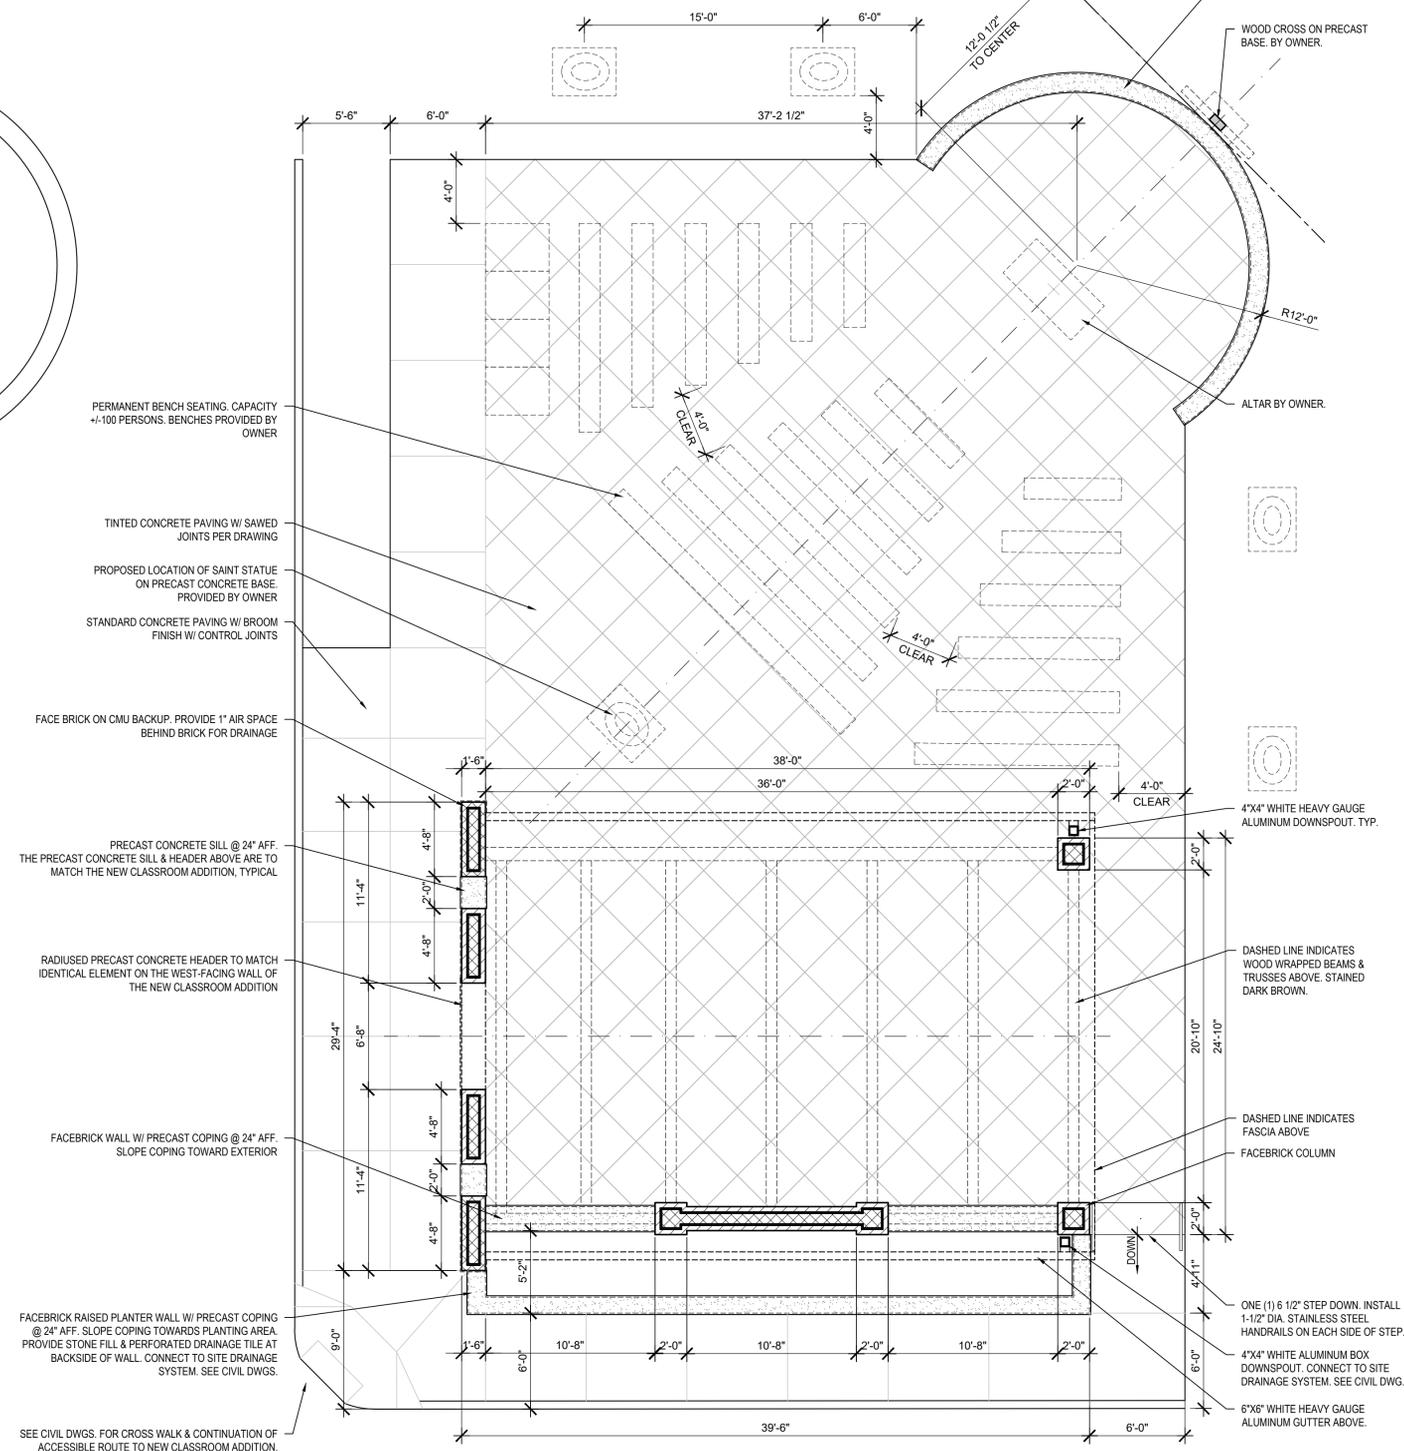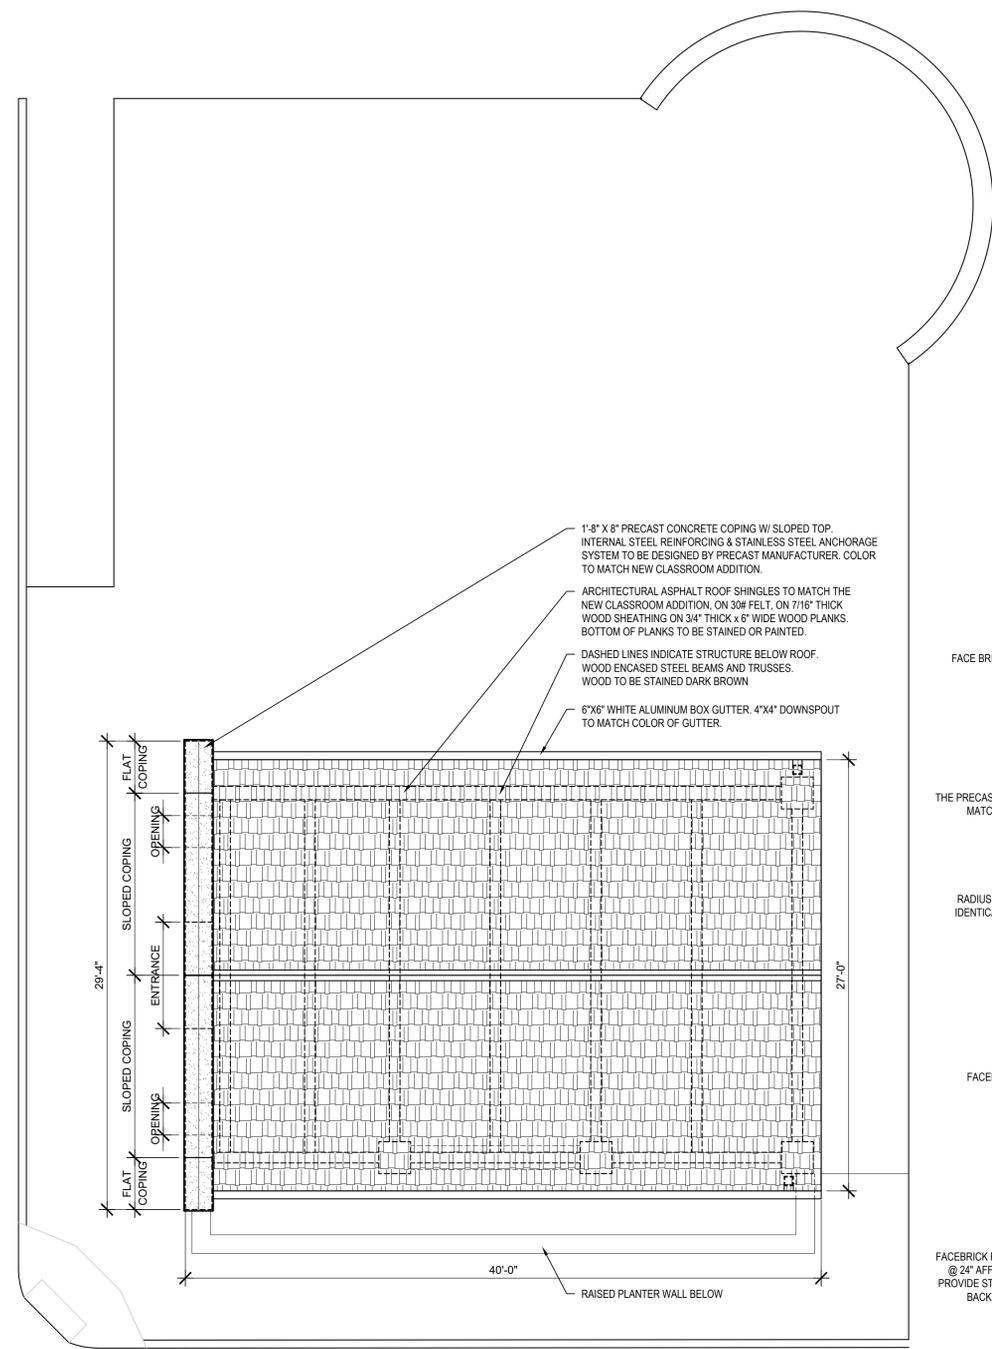


**CLASSROOM & WORSHIP AREA  
 ROOF PLAN**  
 SCALE: 3/16"=1'-0"

**CLASSROOM & WORSHIP AREA  
 IMPROVEMENT PLAN**  
 SCALE: 3/16"=1'-0"

AHRB REVIEW	05.03.22
ISSUED	BY DATE
<b>PARTIAL SITE PLAN &amp; ROOF PLAN</b>	
Scale: 3/16" = 1'-0"	Sheet: A-101
Date: 05.03.22	

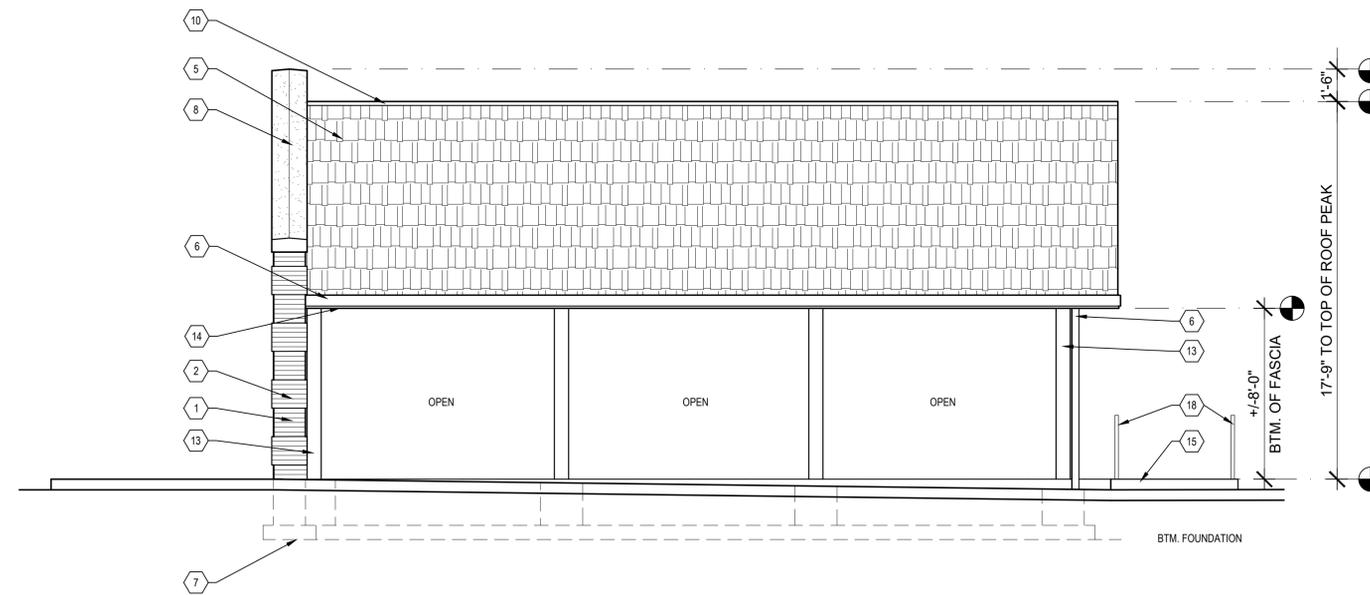


**CLASSROOM & WORSHIP AREA  
WEST ELEVATION**  
SCALE: 1/4"=1'-0"

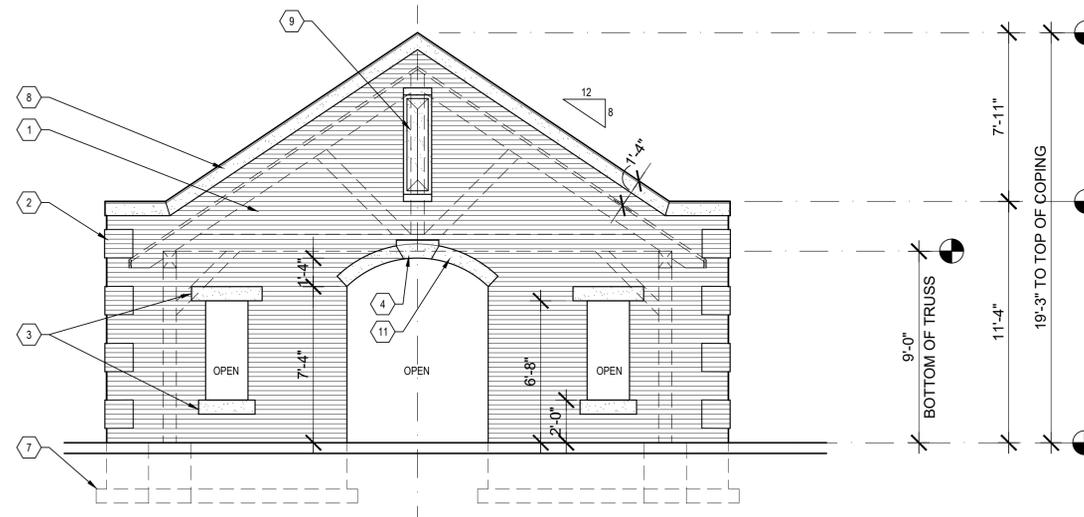

**CLASSROOM & WORSHIP AREA  
NORTH ELEVATION**  
SCALE: 1/4"=1'-0"

**NOTE SYMBOL LEGEND:**

- 1 STANDARD MODULAR BRICK MASONRY UNIT. COLOR TO MATCH NEW CLASSROOM ADDITION.
- 2 16"x16" BRICK MASONRY QUOINS TO MATCH CLASSROOM ADDITION.
- 3 8" H. x 4" D. PRECAST CONCRETE HEAD AND SILL. HEADS TO EXTEND 8" PAST EACH SIDE OF OPENING, & SILLS TO EXTEND 4" PAST EACH SIDE OF OPENING. PROFILES TO MATCH CLASSROOM ADDITION.
- 4 PRECAST CONCRETE KEY ELEMENT TO MATCH CLASSROOM ADDITION.
- 5 ARCHITECTURAL ASPHALT ROOF SHINGLES ON 30# FELT PAPER, ON 1-1/2" THICK T&G PINE DECKING.
- 6 6"x8" WHITE ALUMINUM BOX GUTTER & 6"x6" WHITE DOWNSPOUTS, TYP. TIE INTO SITE DRAINAGE SYSTEM. SEE CIVIL DWGS.
- 7 LINE OF FOUNDATION & FOOTING SYSTEM BELOW. GC TO COORDINATE BOTTOM OF FOUNDATION W/ GRADES TO ENSURE FROST DEPTH IS ACHIEVED.
- 8 1'-8" W. x 8" D. PRECAST CONCRETE COPING W/ SLOPED TOP. ENSURE 1" OVERHANG ON EACH SIDE OF MASONRY.
- 9 1'-4" W. X 5'-4" L. VERTICAL PRECAST CONCRETE ELEMENT TO MATCH CLASSROOM ADDITION.
- 10 PRE-FABRICATED SHINGLE-COVERED RIDGE VENT.
- 11 PRECAST CONCRETE RADIUSSED ENTRY ELEMENT TO MATCH CLASSROOM ADDITION.
- 12 HEAVY-TIMBER WOOD TRUSSES, STAINED.
- 13 8"x8" HEAVY-TIMBER POST, STAINED.
- 14 ALUMINUM-WRAPPED WOOD FASCIA BOARD.
- 15 CAST-IN-PLACE CONCRETE STEP W/ FOUR (4) TOOLED NON-SLIP GROOVES AT FRONT OF TREAD.
- 16 ALUMINUM DRIP EDGE. COLOR TO MATCH STAINED/PAINTED WOOD TRUSS.
- 17 ANGLED WOOD TRUSS BRACE. BOTTOM OF BRACE AT 6'-0" PER TRUSS MANUFACTURER.
- 18 1-1/2" DIAMETER STAINLESS STEEL HANDRAIL ON EACH SIDE OF STEP.



**Project Consultants:**  
Civil Engineer:  
**Wohlwend Engineering Group**  
4216 Karg Industrial Parkway  
Tallmadge, OH 44240  
P:(330) 673.2400

Landscape Architect:  
**James S. McKnight**  
P.O. Box 14158  
P:(216) 952.2408

Structural Engineer:  
**Thorson Baker & Assoc.**  
3030 West Streetsboro Rd.  
Richfield, OH 44286  
P:(330) 659.6688




**Seton Catholic School  
Site Improvements**  
6923 STOW ROAD  
HUDSON, OHIO 44236


REVISION 01	06.13.22
AHRB REVIEW	05.03.22
ISSUED	BY DATE

**NORTH & EAST  
ELEVATIONS**

Scale: 1/4" = 1'-0"	Sheet: A-102
Date: 06.13.22	

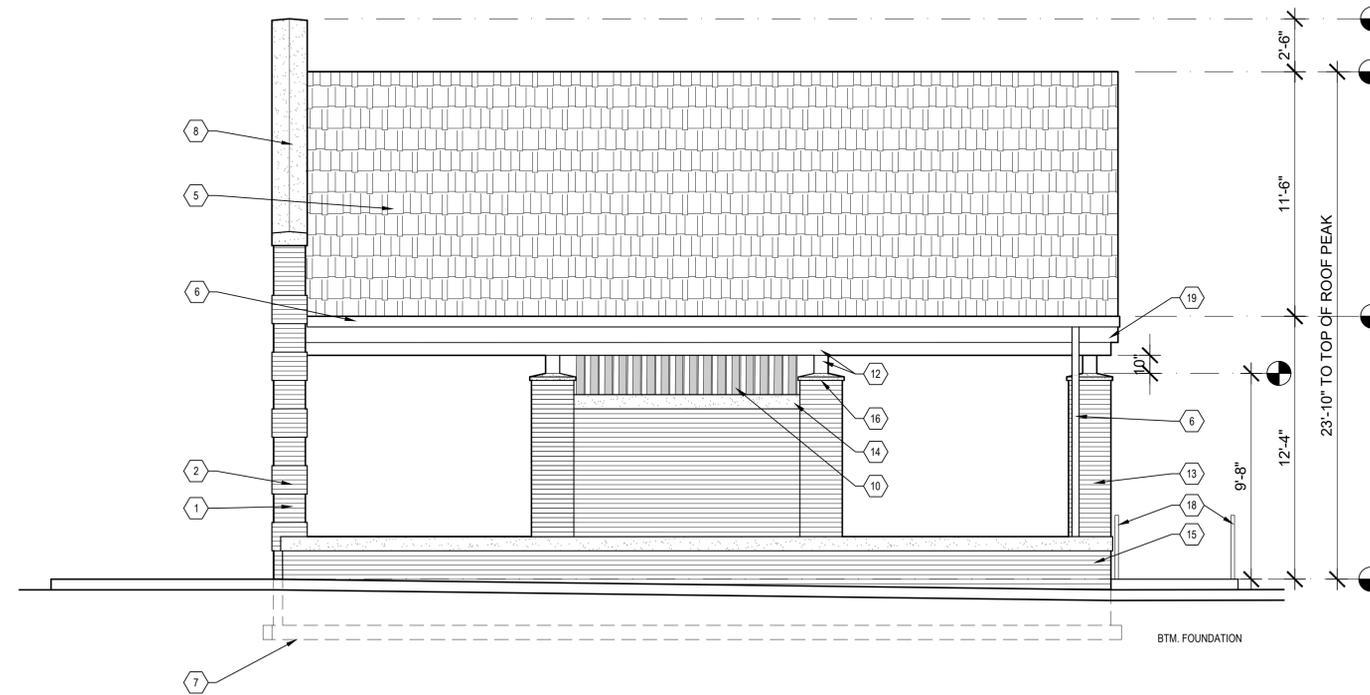


**CLASSROOM & WORSHIP AREA  
WEST ELEVATION**  
SCALE: 1/4"=1'-0"

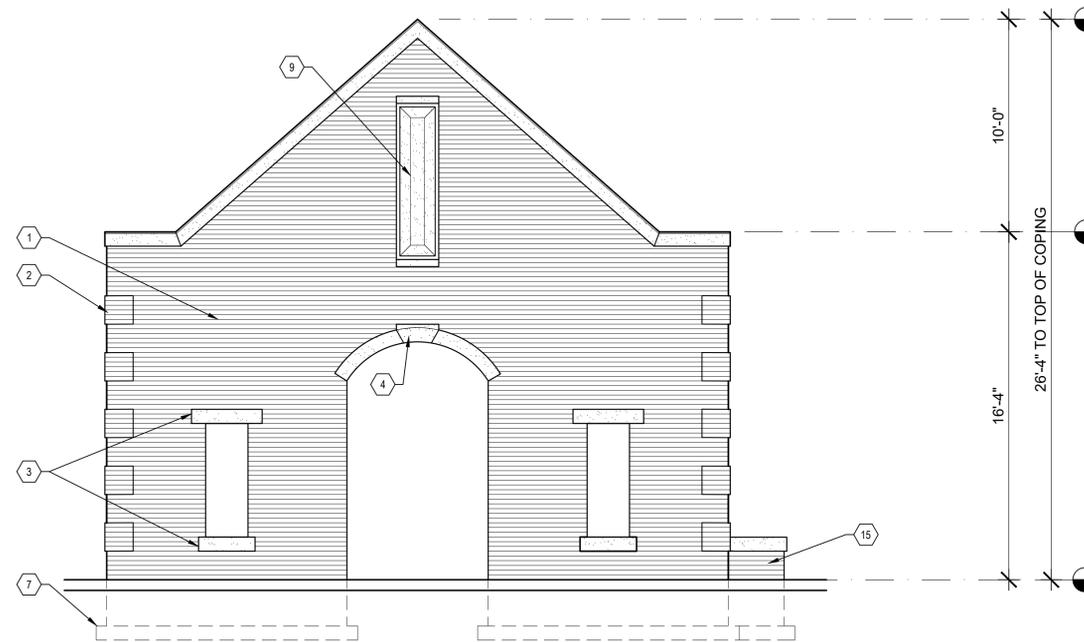

**CLASSROOM & WORSHIP AREA  
NORTH ELEVATION**  
SCALE: 1/4"=1'-0"

**NOTE SYMBOL LEGEND:**

- 1 STANDARD MODULAR BRICK MASONRY UNIT. COLOR TO MATCH NEW CLASSROOM ADDITION.
- 2 16"x16" BRICK MASONRY QUOINS TO MATCH CLASSROOM ADDITION.
- 3 8" H. x 4" D. PRECAST CONCRETE HEAD AND SILL. HEADS TO EXTEND 8" PAST EACH SIDE OF OPENING. & SILLS TO EXTEND 4" PAST EACH SIDE OF OPENING. PROFILES TO MATCH CLASSROOM ADDITION.
- 4 PRECAST CONCRETE KEY ELEMENT TO MATCH CLASSROOM ADDITION.
- 5 ARCHITECTURAL ASPHALT ROOF SHINGLES ON 30# FELT PAPER OVER 7/16" PLYWOOD SHEATHING, ON 6" WIDE WOOD PLANKS.
- 6 6"x6" WHITE ALUMINUM BOX GUTTER & 4"x4" WHITE DOWNSPOUTS. TYP. TIE INTO SITE DRAINAGE SYSTEM. SEE CIVIL DWGS.
- 7 LINE OF FOUNDATION & FOOTING SYSTEM BELOW. GC TO COORDINATE BOTTOM OF FOUNDATION W/ GRADES TO ENSURE FROST DEPTH IS ACHIEVED.
- 8 1'-8" W. x 8" D. PRECAST CONCRETE COPING W/ SLOPED TOP. ENSURE 1" OVERHANG ON EACH SIDE OF MASONRY.
- 9 2'-0" W. x 8'-0" L. PRECAST CONCRETE ELEMENT TO MATCH CLASSROOM ADDITION.
- 10 SUN GLARE PROTECTION: 1" THICK x 6" WIDE ALUMINUM LOUVERS - VERTICAL. & INSTALLED AT A 45-DEGREE ANGLE.
- 11 PRECAST CONCRETE RADIUSSED ENTRY ELEMENT TO MATCH CLASSROOM ADDITION.
- 12 WOOD WRAPPED STEEL BEAMS & TRUSSES.
- 13 BRICK MASONRY COLUMN.
- 14 PRECAST CONCRETE COPING.
- 15 RAISED PLANTER WALL: 2'-0" AFF W/ PRECAST CONCRETE COPING.
- 16 FOUR (4) PIECE SLOPED PRECAST CONCRETE COPING INSTALLED AROUND STEEL COLUMNS.
- 17 DASHED LINES INDICATE WALL-MOUNTED MARKER OR CHALK BOARD. PROVIDED BY OWNER.
- 18 1-1/2" DIAMETER STAINLESS STEEL HANDRAIL ON EACH SIDE OF STEP.
- 19 PAINTED WOOD FASCIA TO MATCH THE COLOR OF THE WRAPPED BEAMS.
- 20 STEEL GUSSET PLATES, PAINTED BLACK.



**Kaczmar architects incorporated**  
1468 West 9th Street #400  
Cleveland, OH 44113  
P: 216.687.1555 F: 216.687.1558

**Project Consultants:**  
Civil Engineer:  
**Wohlwend Engineering Group**  
4216 Karg Industrial Parkway  
Tallmadge, OH 44240  
P: (330) 673.2400

Landscape Architect:  
**James S. McKnight**  
P.O. Box 14158  
P: (216) 952.2408

Structural Engineer:  
**Thorson Baker & Assoc.**  
3030 West Streetsboro Rd.  
Richfield, OH 44286  
P: (330) 659.6688




**Seton Catholic School  
Site Improvements**  
6923 STOW ROAD  
HUDSON, OHIO 44236


AHRB REVIEW	05.03.22
ISSUED	BY DATE

**NORTH & EAST  
ELEVATIONS**

Scale: 1/4" = 1'-0"	Sheet: A-102
Date: 05.03.22	

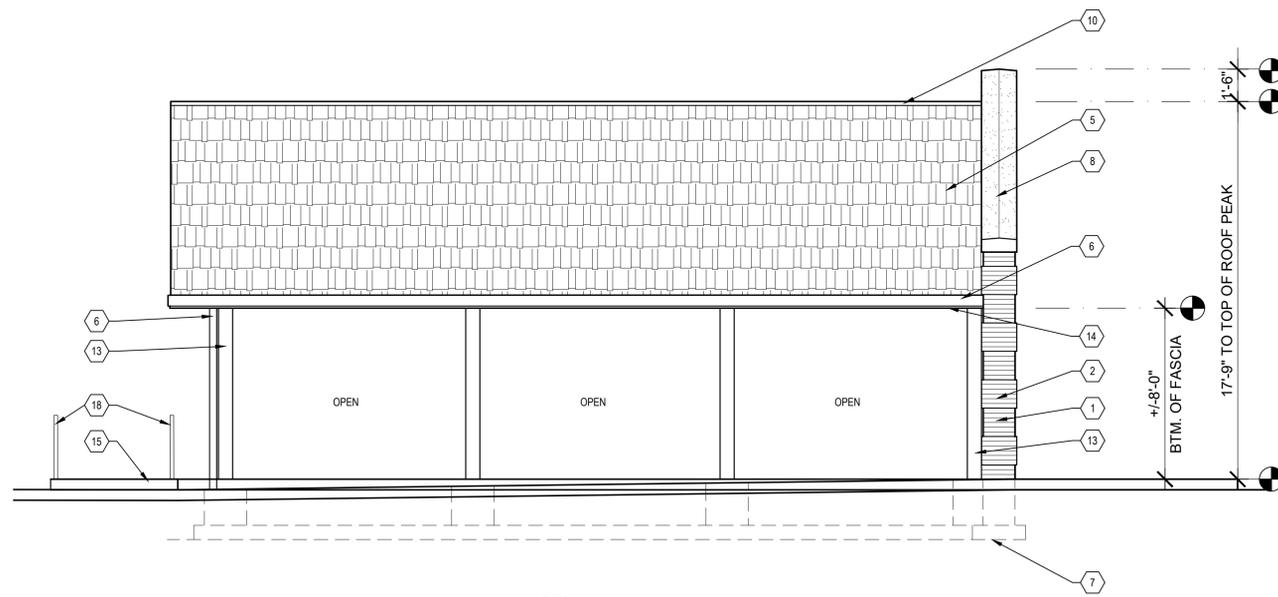


**CLASSROOM & WORSHIP AREA  
EAST ELEVATION**  
SCALE: 1/4"=1'-0"

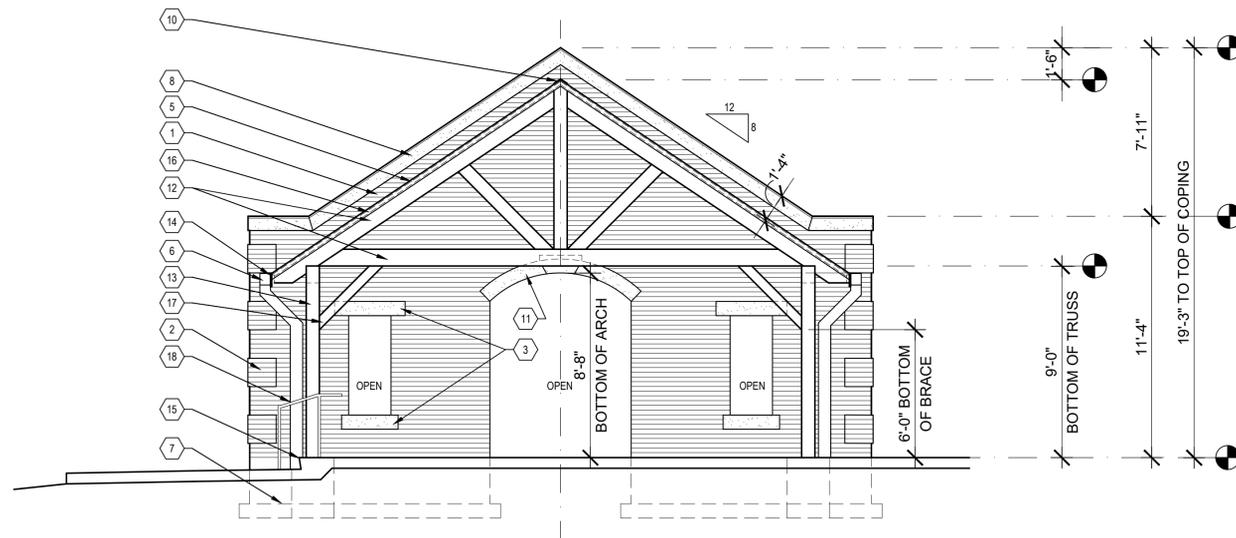

**CLASSROOM & WORSHIP AREA  
SOUTH ELEVATION**  
SCALE: 1/4"=1'-0"

**NOTE SYMBOL LEGEND:**

- 1 STANDARD MODULAR BRICK MASONRY UNIT. COLOR TO MATCH NEW CLASSROOM ADDITION.
- 2 16"x16" BRICK MASONRY QUOINS TO MATCH CLASSROOM ADDITION.
- 3 8" H. x 4" D. PRECAST CONCRETE HEAD AND SILL. HEADS TO EXTEND 8" PAST EACH SIDE OF OPENING. & SILLS TO EXTEND 4" PAST EACH SIDE OF OPENING. PROFILES TO MATCH CLASSROOM ADDITION.
- 4 PRECAST CONCRETE KEY ELEMENT TO MATCH CLASSROOM ADDITION.
- 5 ARCHITECTURAL ASPHALT ROOF SHINGLES ON 30# FELT PAPER, ON 1-1/2" THICK T&G PINE DECKING.
- 6 6"x6" WHITE ALUMINUM BOX GUTTER & 6"x6" WHITE DOWNSPOUTS. TYP. TIE INTO SITE DRAINAGE SYSTEM. SEE CIVIL DWGS.
- 7 LINE OF FOUNDATION & FOOTING SYSTEM BELOW. GC TO COORDINATE BOTTOM OF FOUNDATION W/ GRADES TO ENSURE FROST DEPTH IS ACHIEVED.
- 8 1'-8" W. x 8" D. PRECAST CONCRETE COPING W/ SLOPED TOP. ENSURE 1" OVERHANG ON EACH SIDE OF MASONRY.
- 9 1'-4" W. X 5'-4" L. VERTICAL PRECAST CONCRETE ELEMENT TO MATCH CLASSROOM ADDITION.
- 10 PRE-FABRICATED SHINGLE-COVERED RIDGE VENT.
- 11 PRECAST CONCRETE RADIUSSED ENTRY ELEMENT TO MATCH CLASSROOM ADDITION.
- 12 HEAVY-TIMBER WOOD TRUSSES, STAINED.
- 13 8"x8" HEAVY-TIMBER POST, STAINED.
- 14 ALUMINUM-WRAPPED WOOD FASCIA BOARD.
- 15 CAST-IN-PLACE CONCRETE STEP W/ FOUR (4) TOOLED NON-SLIP GROOVES AT FRONT OF TREAD.
- 16 ALUMINUM DRIP EDGE. COLOR TO MATCH STAINED/PAINTED WOOD TRUSS.
- 17 ANGLED WOOD TRUSS BRACE. BOTTOM OF BRACE AT 6'-0" PER TRUSS MANUFACTURER.
- 18 1-1/2" DIAMETER STAINLESS STEEL HANDRAIL ON EACH SIDE OF STEP.



**Kaczmar architects incorporated**  
1468 West 9th Street #400  
Cleveland, OH 44113  
P:216.687.1555 F:216.687.1558

**Project Consultants:**  
Civil Engineer:  
**Wohlwend Engineering Group**  
4216 Karg Industrial Parkway  
Tallmadge, OH 44240  
P:(330) 673.2400

Landscape Architect:  
**James S. McKnight**  
P.O. Box 14158  
P:(216) 952.2408

Structural Engineer:  
**Thorson Baker & Assoc.**  
3030 West Streetsboro Rd.  
Richfield, OH 44286  
P:(330) 659.6688




**Seton Catholic School  
Site Improvements**  
6923 STOW ROAD  
HUDSON, OHIO 44236


REVISION 01	06.13.22
AHRB REVIEW	05.03.22
ISSUED	BY DATE

**SOUTH & EAST  
ELEVATIONS**

Scale: 1/4" = 1'-0"  
Date: 06.13.22  
Sheet: A-103

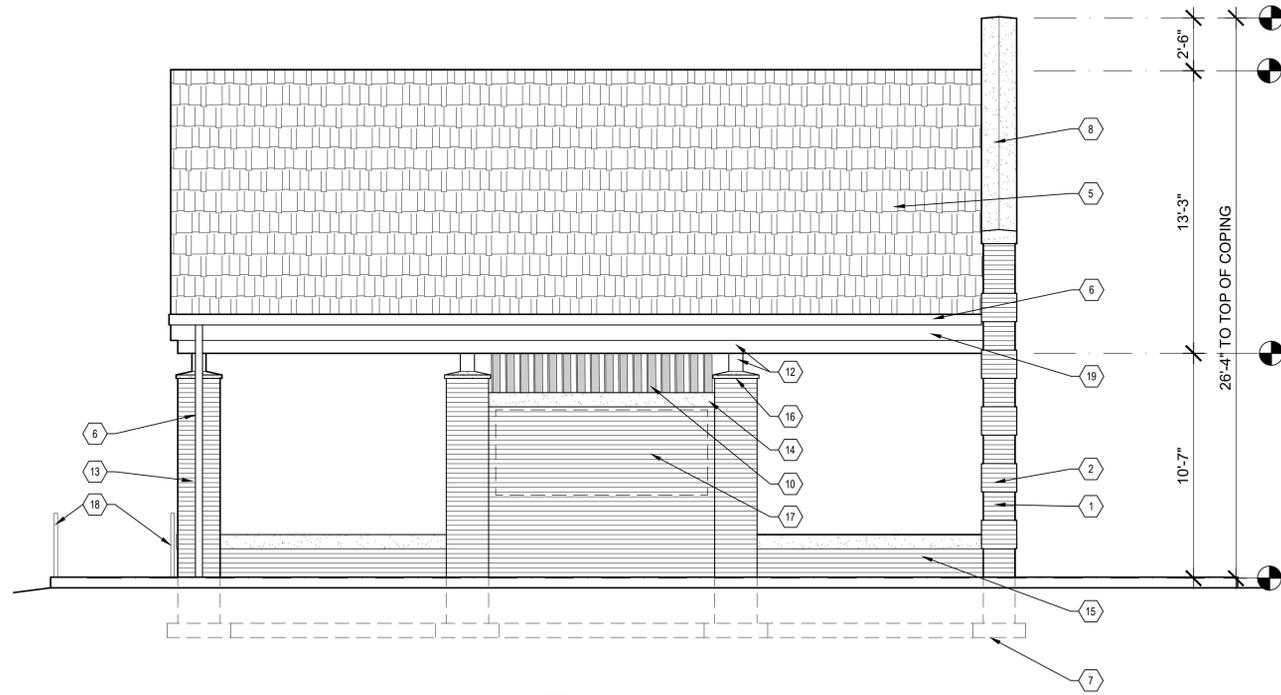


**CLASSROOM & WORSHIP AREA  
EAST ELEVATION**  
SCALE: 1/4"=1'-0"

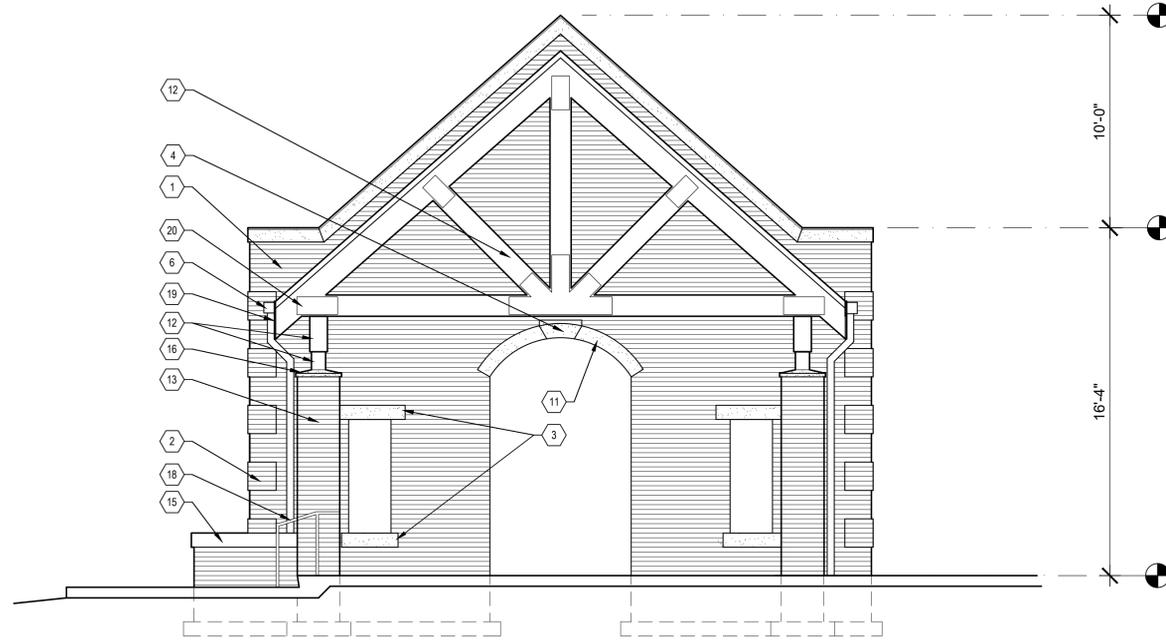

**CLASSROOM & WORSHIP AREA  
SOUTH ELEVATION**  
SCALE: 1/4"=1'-0"

**NOTE SYMBOL LEGEND:**

- 1 STANDARD MODULAR BRICK MASONRY UNIT. COLOR TO MATCH NEW CLASSROOM ADDITION.
- 2 16"x16" BRICK MASONRY QUOINS TO MATCH CLASSROOM ADDITION.
- 3 8" H. x 4" D. PRECAST CONCRETE HEAD AND SILL. HEADS TO EXTEND 8" PAST EACH SIDE OF OPENING, & SILLS TO EXTEND 4" PAST EACH SIDE OF OPENING. PROFILES TO MATCH CLASSROOM ADDITION.
- 4 PRECAST CONCRETE KEY ELEMENT TO MATCH CLASSROOM ADDITION.
- 5 ARCHITECTURAL ASPHALT ROOF SHINGLES ON 30# FELT PAPER OVER 7/16" PLYWOOD SHEATHING, ON 6" WIDE WOOD PLANKS.
- 6 6"x6" WHITE ALUMINUM BOX GUTTER & 4"x4" WHITE DOWNSPOUTS. TYP. TIE INTO SITE DRAINAGE SYSTEM. SEE CIVIL DWGS.
- 7 LINE OF FOUNDATION & FOOTING SYSTEM BELOW. GC TO COORDINATE BOTTOM OF FOUNDATION W/ GRADES TO ENSURE FROST DEPTH IS ACHIEVED.
- 8 1'-8" W. x 8" D. PRECAST CONCRETE COPING W/ SLOPED TOP. ENSURE 1" OVERHANG ON EACH SIDE OF MASONRY.
- 9 2'-0" W. x 8'-0" L. PRECAST CONCRETE ELEMENT TO MATCH CLASSROOM ADDITION.
- 10 SUN GLARE PROTECTION: 1" THICK x 6" WIDE ALUMINUM LOUVERS - VERTICAL, & INSTALLED AT A 45-DEGREE ANGLE.
- 11 PRECAST CONCRETE RADIUSUED ENTRY ELEMENT TO MATCH CLASSROOM ADDITION.
- 12 WOOD WRAPPED STEEL BEAMS & TRUSSES.
- 13 BRICK MASONRY COLUMN.
- 14 PRECAST CONCRETE COPING.
- 15 RAISED PLANTER WALL: 2'-0" AFF W/ PRECAST CONCRETE COPING.
- 16 FOUR (4) PIECE SLOPED PRECAST CONCRETE COPING INSTALLED AROUND STEEL COLUMNS.
- 17 DASHED LINES INDICATE WALL-MOUNTED MARKER OR CHALK BOARD. PROVIDED BY OWNER.
- 18 1-1/2" DIAMETER STAINLESS STEEL HANDRAIL ON EACH SIDE OF STEP.
- 19 PAINTED WOOD FASCIA TO MATCH THE COLOR OF THE WRAPPED BEAMS.
- 20 STEEL GUSSET PLATES, PAINTED BLACK.

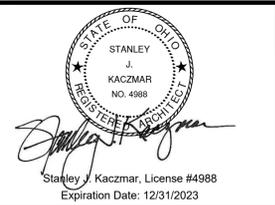

**Kaczmar architects incorporated**  
1468 West 9th Street #400  
Cleveland, OH 44113  
P: 216.687.1555 F: 216.687.1558

**Project Consultants:**  
Civil Engineer:  
**Wohlwend Engineering Group**  
4216 Karg Industrial Parkway  
Tallmadge, OH 44240  
P: (330) 673.2400

Landscape Architect:  
**James S. McKnight**  
P.O. Box 14158  
P: (216) 952.2408

Structural Engineer:  
**Thorson Baker & Assoc.**  
3030 West Streetsboro Rd.  
Richfield, OH 44286  
P: (330) 659.6688



**Seton Catholic School  
Site Improvements**  
6923 STOW ROAD  
HUDSON, OHIO 44236

AHRB REVIEW	05.03.22
ISSUED	BY DATE

**SOUTH & EAST  
ELEVATIONS**

Scale: 1/4" = 1'-0"	Sheet: A-103
Date: 05.03.22	