

DUDICK RESIDENCE



ARCHITECT

PENINSULA ARCHITECTS
1775 MAIN STREET, PENINSULA, OHIO
P: 330.657.2800

CONTACT:

STRUCTURAL

CIVIL

BUILDER

MEP

INTERIORS

Peninsula

www.pa-architects.com

1775 Main Street
Peninsula, Ohio 44264
T 330.657.2800

**PROGRESS
NOT FOR
CONSTRUCTION**


4/1/2024

DUDICK RESIDENCE
1505 EAST HINES HILL ROAD, HUDSON, OHIO 44236

ABBREVIATIONS

ABV	ABOVE	HC	HOLLOW CORE
AC	AIR CONDITIONING	HDWR.	HARDWARE
AFF	ABOVE FINISHED FLOOR	HM	HOLLOW METAL
ALT	ALTERNATE	HVAC	HEATING, VENTILATION, AND
AJH	AUTHORITY HAVING JURISDICTION	HT	HEIGHT
ALUM	ALUMINUM	INSUL	INSULATION
APPROX.	APPROXIMATELY	JST	JOIST
ARCH	ARCHITECTURAL		
ASPH	ASPHALT		
BD	BOARD	LAM	LAMINATED
BIDG	BUILDING	LF	LINEAR FOOT
BRG	BEARING	MAS	MASONRY
BOTT	BOTTOM	MATL	MATERIAL
BTW	BETWEEN	MAX.	MAXIMUM
CF	CUBIC FEET	MECH	MECHANICAL
CIP	CAST IN PLACE	MFG.	MANUFACTURER
CJ	CONTROL JOINT	MIN.	MINIMUM
CLG	CEILING	MISC	MISCELLANEOUS
CLR	CLEAR	MO	MASONRY OPENING
CMU	CONCRETE MASONRY UNIT	MTD	MOUNTED
CONC	CONCRETE	MTL	METAL
CO	CLEAN OUT	NOM	NOMINAL
CONT	CONTINUOUS	NTS	NOT TO SCALE
DBL	DOUBLE	OI	OVER
DEPT	DEPARTMENT	O.C.	ON CENTER
DIA	DIAMETER	OPN	OPENING
DN	DOWN	PREFAB	PREFABRICATED
DR	DOOR	PLYWD	PLYWOOD
DS	DOWNSPOUT	P-LAM	PLASTIC LAMINATE
DTL	DETAIL	PR	PAIR
DWG	DRAWING	PSI	POUNDS PER SQUARE INCH
EA	EACH	REF	REFERENCE
ELEC	ELECTRICAL	RM	ROOM
EQ	EQUAL	RQ	ROUGH OPENING
EXH	EXHAUST	REQ	REQUIRED
EXIST	EXISTING	SC	SOLID CORE
EXP	EXPOSED	SECT	SECTION
EXT	EXTERIOR	SH	SIMILAR
FD	FLOOR DRAIN	STRUC	STRUCTURAL
FDM	FOUNDATION	TYP	TYPICAL
FIN	FINISHED	UNO	UNLESS NOTED OTHERWISE
FLR	FLOOR	W	WITH
FT	FOOT	WWF	WELDED WIRE FABRIC
FTG	FOOTING		
FUR	FURRING		
GALV	GALVANIZED		
GA	Gauge		
GC	GENERAL CONTRACTOR		
GYP	BD GYPSUM BOARD		
GYP	GYPSUM		

SYMBOLS

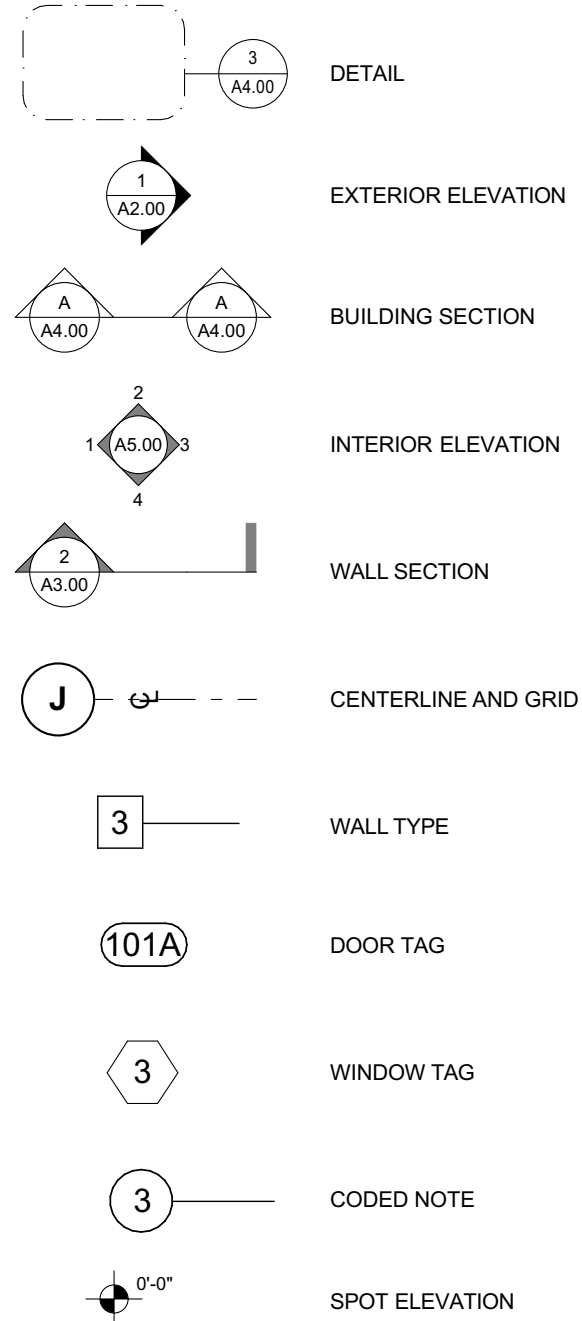

MATERIALS LEGEND

	DIMENSIONAL LUMBER		GRAVEL
	PLYWOOD		CONCRETE
	FINISH WOOD		CONCRETE BLOCK
	GYPSUM BOARD		STEEL
	BRICK		RIGID INSULATION
	EARTH		SPRAY FOAM INSULATION
	STONE VENEER		MINERAL WOOL INSULATION
	BLOCKING		METAL DECK

PROJECT GENERAL NOTES

CONTRACTOR SHALL PROVIDE ALL MATERIALS AND WORKMANSHIP FOR ALL CONSTRUCTION REQUIRED HEREIN AND SHALL BE IN ACCORDANCE WITH THE:

BUILDING CODE
RESIDENTIAL CODE
MECHANICAL CODE
ENERGY CONSERVATION CODE
WILDLAND-URBAN INTERFACE
NFPA 70 - NATIONAL ELECTRICAL CODE
UNIFORM PLUMBING CODE

THE CONTRACTOR WILL FURNISH ALL LABOR, MATERIAL, EQUIPMENT, PERMITS, TAXES, AND INSURANCE NECESSARY TO COMPLETE THE WORK INDICATED AND/OR IMPLIED IN THE CONSTRUCTION DOCUMENTS UNLESS NOTED OTHERWISE AND WILL COORDINATE THE WORK RESPONSIBILITIES OF ALL SUBCONTRACTORS. ALL LABOR AND MATERIALS TO CARRY OUT FULLY THE INTENTIONS OF THE PLANS AND SPECIFICATIONS ARE PART OF THE CONTRACT, WHETHER OR NOT SPECIFICALLY DOCUMENTED.

ALL WORK WILL CONFORM TO THE CURRENT OHIO BUILDING, MECHANICAL & PLUMBING CODES, AS WELL AS THE CURRENT NATIONAL BOARD OF FIRE UNDERWRITERS AND ALL OTHER APPLICABLE CITY CODES. LOCAL LAWS AND AUTHORITIES HAVING JURISDICTION, CODE STANDARDS AND PUBLICATIONS OF PRIVATE AND PUBLIC BODIES MENTIONED WITHIN THE SPECIFICATIONS OR ON THE DRAWINGS, WILL BE CONSIDERED TO BE THOSE IN FORCE AT THE TIME OF THE CONTRACT AWARD.

THE CONTRACTOR WILL BE RESPONSIBLE FOR ALL CONTROLLED INSPECTIONS AND ANY TECHNICAL TESTING REQUIRED FOR CONTROLLED INSPECTIONS AS STIPULATED BY ALL APPLICABLE CODES.

ALL MANUFACTURED ARTICLES, MATERIALS, AND EQUIPMENT WILL BE NEW AND FREE OF DEFECTS AND WILL BE SUPPLIED, INSTALLED, CONNECTED, ERECTED, USED, CLEANED, AND CONDITIONED AS DIRECTED BY THE RESPECTIVE MANUFACTURERS, UNLESS SPECIFIED OTHERWISE.

THE CONTRACTOR WILL NOTIFY THE ARCHITECT OF ANY ERRORS, OMISSIONS, CONFLICTS, OR AMBIGUITIES IN AND BETWEEN THE DRAWINGS AND THE SPECIFICATIONS PRIOR TO PROCEEDING WITH THE WORK. IF SUCH NOTICE IS NOT FURNISHED TO THE ARCHITECT, THE CONTRACTOR WILL BE DEEMED TO HAVE INSPECTED THE DRAWINGS AND SPECIFICATIONS AND TO HAVE FOUND THEM IN PROPER FORM FOR EXECUTION.

THE CONTRACTOR REPRESENTS THAT HE HAS HAD ADEQUATE ACCESS TO THE JOB SITE AND BUILDING AREA IN WHICH THE WORK IS TO BE PERFORMED, THAT HE HAS SATISFIED HIMSELF AS TO THE NATURE AND LOCATION OF WORK, INCLUDING ANY OBSTRUCTIONS, SCOPE OF WORK, ACTUAL LEVELS, THE EQUIPMENT AND FACILITIES NEEDED, PRELIMINARY TO AND DURING THE EXECUTION OF THE WORK AND ALL OTHER MATTERS, WHICH CAN IN ANY WAY AFFECT THE WORK OR THE COST THEREOF UNDER THIS CONTRACT, AND THAT HE HAS STUDIED THE CONTRACT DOCUMENTS AND ALL OTHER DOCUMENTS PERTAINING TO THE INSTALLATION OF OTHER TRADES WHICH MAY INFLUENCE HIS WORK.

THE CONTRACTOR WILL ASSUME FULL RESPONSIBILITY, INCLUDING RESPONSIBILITY FOR ALL RELATED COSTS FOR ANY AND ALL WORK DONE WITHOUT THE APPROVAL OF THE ARCHITECT IF SUCH WORK IS IN CONFLICT WITH THE CONTRACT DRAWINGS, OR SPECIFICATIONS.

THE CONTRACTOR WILL BE RESPONSIBLE FOR THE SAFE WORKING CONDITIONS AT THE SITE. THE ARCHITECT AND OWNER WILL NOT BE DEEMED TO HAVE ANY RESPONSIBILITY OR LIABILITY IN CONNECTION HEREWITH.

CONSTRUCTION OPERATIONS WILL NOT INVOLVE INTERRUPTION OF HEATING, WATER, ELECTRICAL, OR OTHER SERVICES TO ANY PORTION OF THE BUILDING OUTSIDE THE LIMITS OF THE CONSTRUCTION SITE.

THE CONTRACTOR WILL BE RESPONSIBLE FOR CORRECTING ANY DEFICIENCIES CAUSED BY DEFECTIVE OR ILL-TIMED WORK AT NO ADDITIONAL COST TO THE OWNER.

NO SUBSTITUTIONS ARE PERMITTED EXCEPT WHERE THE TERM "APPROVED EQUAL" APPEARS. ALL SUBSTITUTIONS MUST BE APPROVED IN WRITING BY THE ARCHITECT. THE CONTRACTOR IS TO SUBMIT SAMPLES OR CATALOG CUTS OF ALL VISIBLE MATERIALS AND EQUIPMENT FOR THE ARCHITECT'S APPROVAL PRIOR TO INSTALLATION.

CONTRACTOR TO MAINTAIN FULL SET OF PLANS AND INSTALLATION INSTRUCTIONS ON SITE.

PERFORM VISUAL INSPECTION OF ENVELOPE AND INSULATION TO MEET 2009 IECC, 402.4.2 "AIR SEALING AND INSULATION"

PROJECT INFORMATION

TWO STORY SINGLE FAMILY RESIDENCE
CITY: HUDSON
COUNTY: SUMMIT

SQUARE FOOTAGES

UNFINISHED BASEMENT ---
FIRST FLOOR FINISHED ---
GARAGE ---
SCREEN PORCH ---
EXTERIOR COVERED AREAS ---

SECOND FLOOR FINISHED

TOTAL FINISHED SQUARE FOOTAGE

DRAWING INDEX


* DENOTES SHEETS PRINTED IN COLOR


*G1.00	COVER SHEET
C1.01	EXISTING SURVEY
C1.02	PROPOSED SITE PLAN
S1.01	FOUNDATION PLAN
A1.01	FIRST FLOOR PLAN
A1.02	ROOF PLAN AND WALL SECTION
A3.01	EXTERIOR ELEVATIONS

PROJECT #:	2349
ISSUE:	
SD MEETING	01-23-2024
SD MEETING	02-12-2024
SD MEETING	02-26-2024
FOR PRICING	02-23-2024
SITE/PLAN UPDATE	03-14-2024
HUDSON AHR	04-01-2024

COVER SHEET

*G1.00



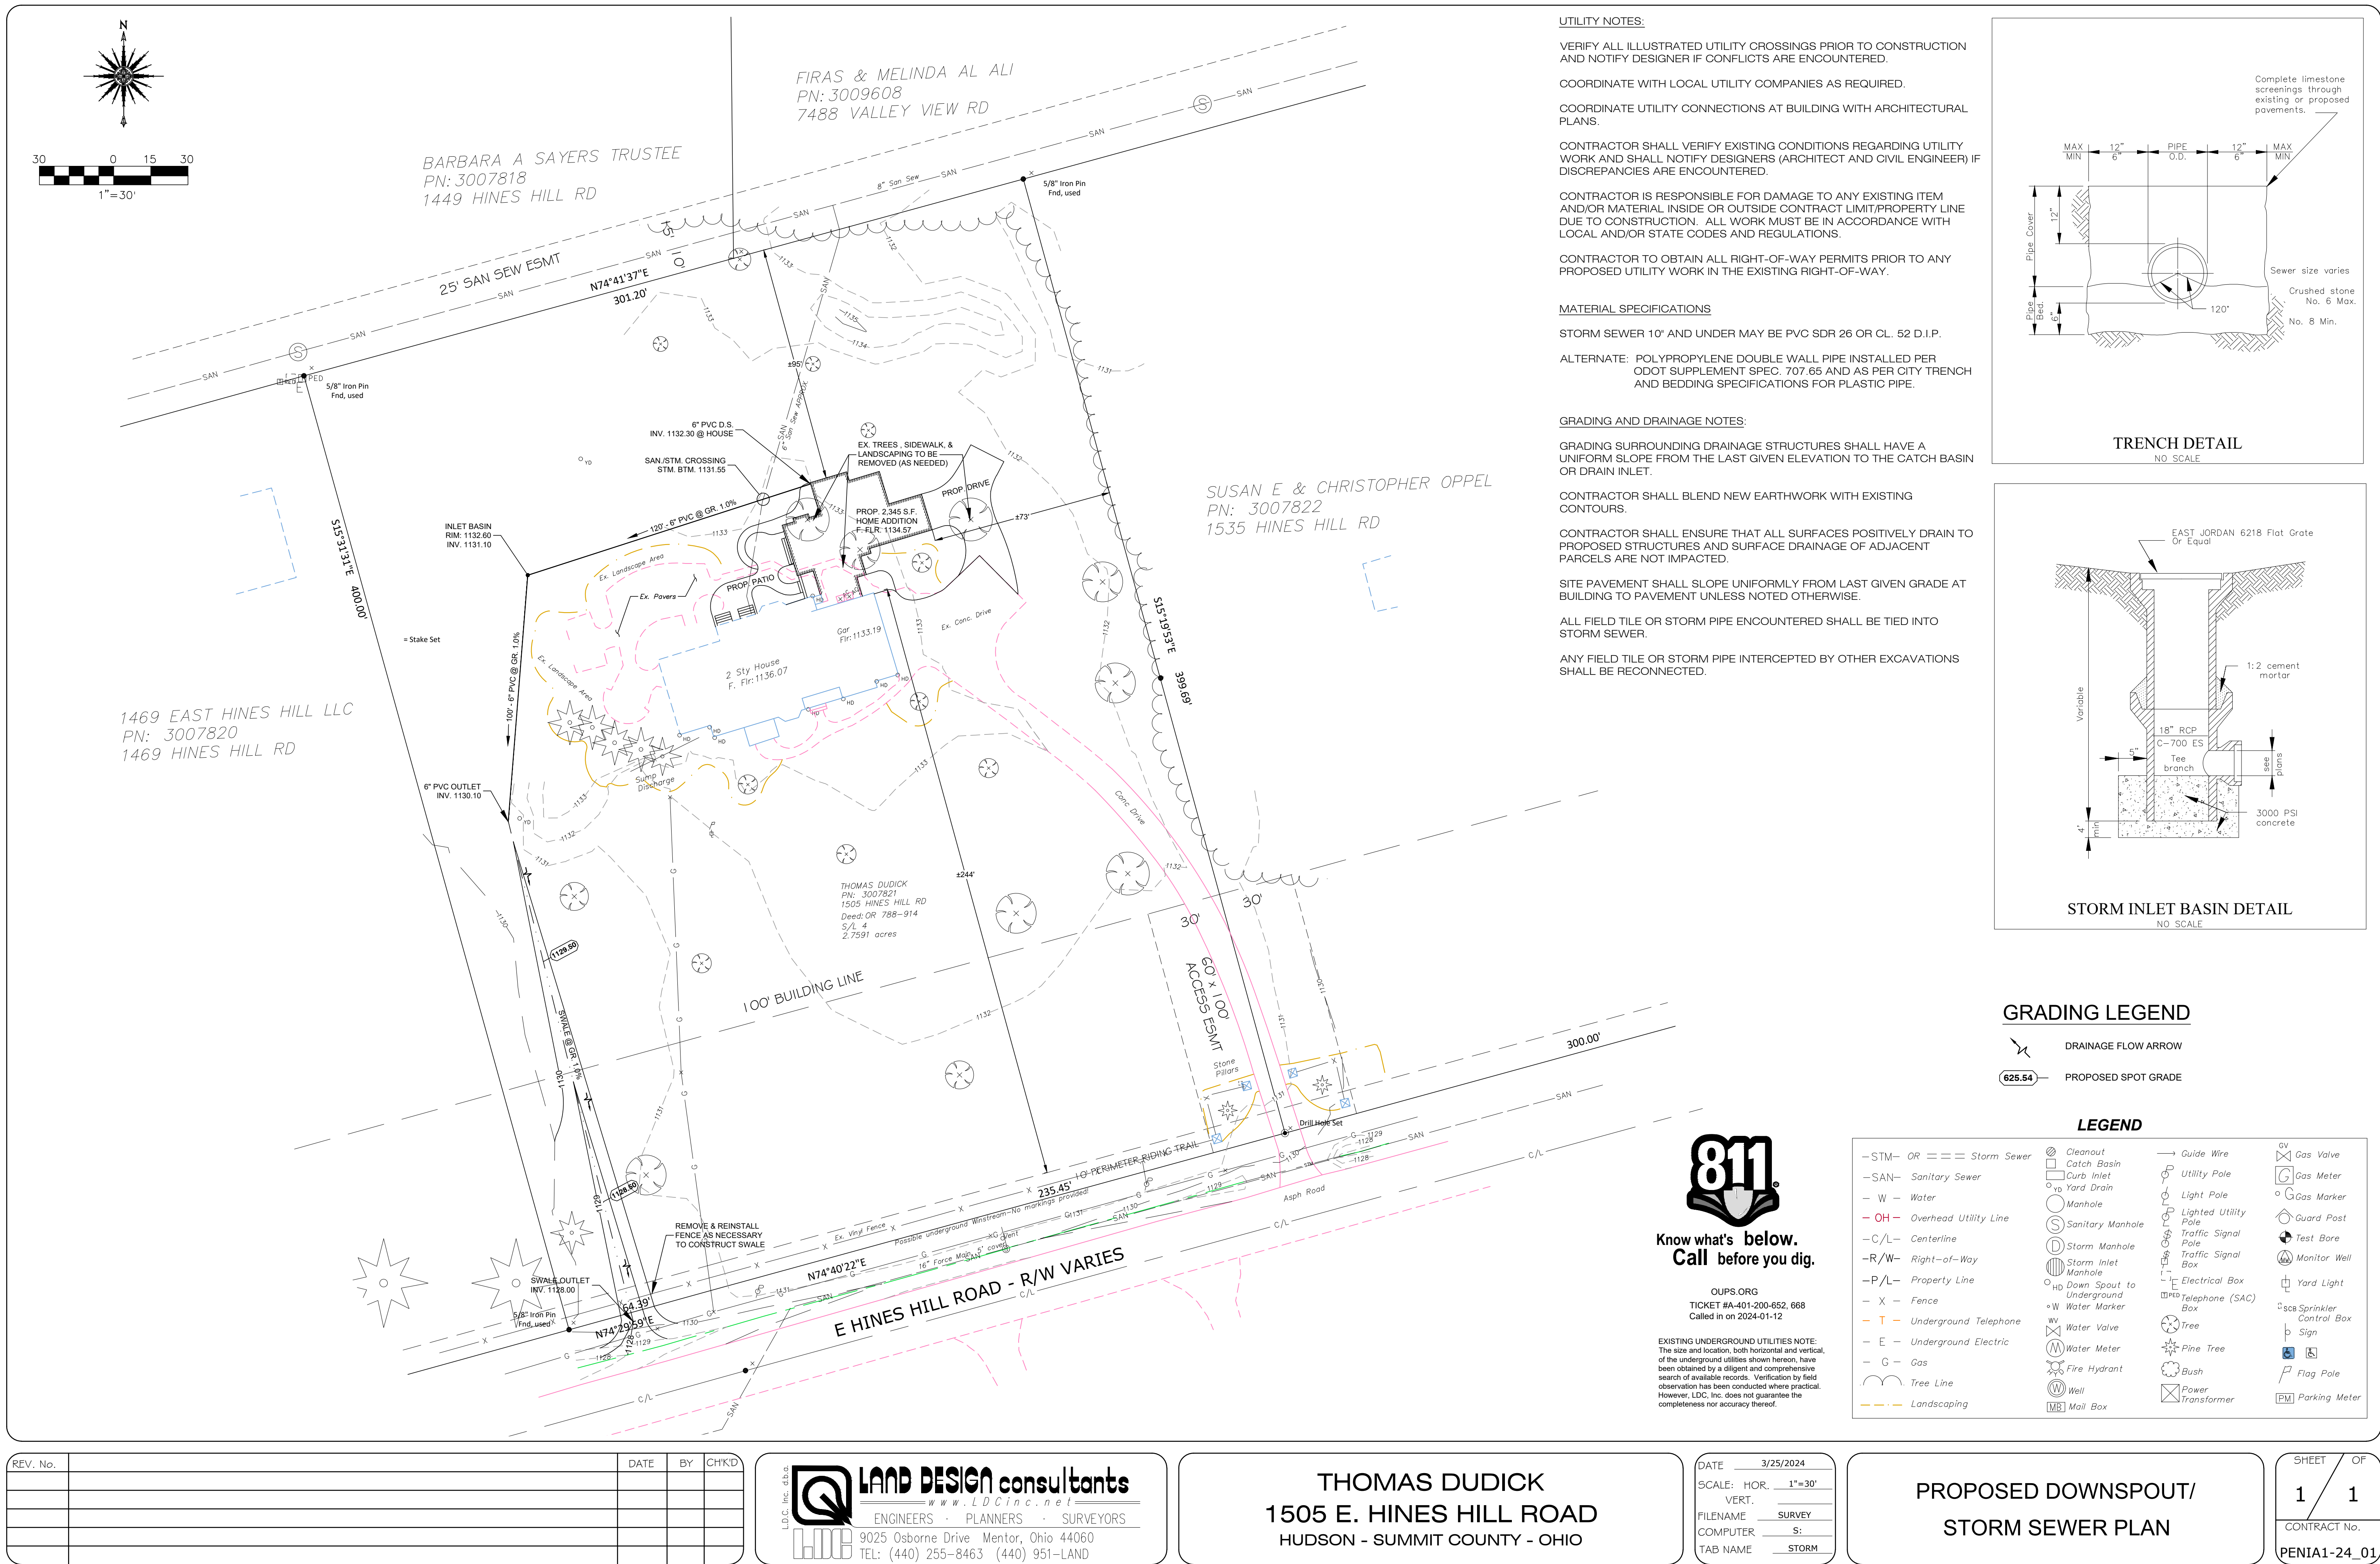

DUDICK RESIDENCE

1505 EAST HINES HILL ROAD, HUDSON, OHIO 44236


PROPOSED SITE PLAN

C1.02

PROJECT #: 2349
ISSUE:
SD MEETING 01-23-2024
SD MEETING 02-12-2024
SD MEETING 02-26-2024
FOR PRICING 02-23-2024
SITE/PLAN UPDATE 03-14-2024
HUDSON AHR 04-01-2024

FOUNDATION WALL TYPES


NOTE: WALL INFORMATION IS DEMONSTRATED IN PLAN VIEW

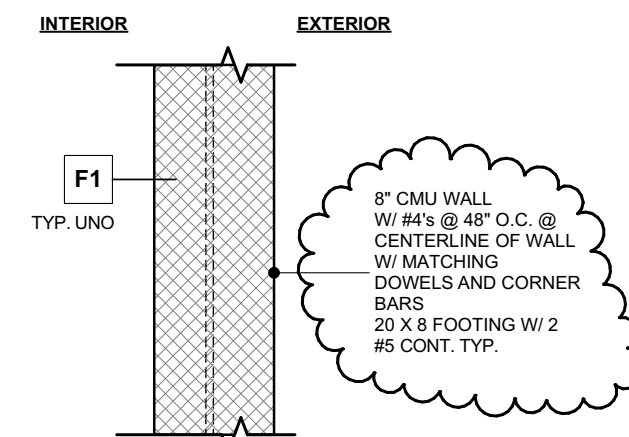

FOUNDATION PLAN GENERAL NOTES

COLUMN & FOOTING SCHEDULE
A 3" STD WEIGHT (7.8 PLF)
STEEL COLUMN W/ 1" CAP AND BASE PLATE
W/ 4" 18" BOLTS AT EACH PLATE
FOOTING TO BE 3' X 3' X 2' X 4' X 12"
W/ (3) #5 EACH WAY

SUBSTITUTION CHART:	
LVL SIZE	WF STEEL SIZE
(2) 12" LVL	W10 x 15
(2) 14" LVL	W12 x 16
(2) 16" LVL	W14 x 22
(2) 18" LVL	W16 x 26
(2) 12" LVL	W10 x 17
(2) 14" LVL	W12 x 16
(2) 16" LVL	W14 x 22
(2) 18" LVL	W16 x 26
(2) 18" LVL W/ 12" PL	W16 x 26
(2) 18" LVL W/ 12" PL	W16 x 40

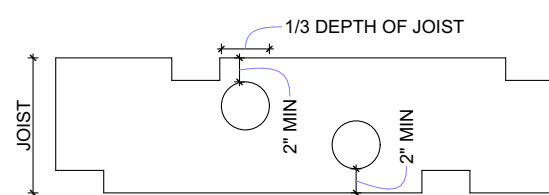

SECTION 902.8
NOTCHES IN THE TOP OR BOTTOM OF JOISTS SHALL NOT EXCEED ONE-SIXTH THE DEPTH OF THE JOIST AND SHALL NOT BE LOCATED IN THE MIDDLE THIRD OF THE SPAN. WHERE JOISTS ARE NOTCHED ON THE ENDS FOR A LEDGER, THE NOTCH SHALL NOT EXCEED ONE-FOURTH THE JOIST DEPTH. CANTILEVERED JOISTS SHALL NOT BE NOTCHED UNLESS THE REDUCED SECTION PROPERTIES AND LUMBER DEFECTS ARE CONSIDERED IN THE DESIGN. HOLES DRILLED OR BORED IN JOISTS SHALL NOT BE WITHIN 3 INCHES OF THE TOP OR BOTTOM OR THE JOISTS AND THEIR DIAMETER SHALL NOT EXCEED ONE-THIRD THE DEPTH OF THE JOIST.



SECTION 902.8
ANY STUD IN AN EXTERIOR BEARING PARTITION MAY BE CUT OR NOTCHED TO A DEPTH NOT EXCEEDING 25% OF ITS WIDTH. STUDS IN NON-BEARING PARTITIONS MAY BE NOTCHED TO A DEPTH NOT TO EXCEED 40% OF A SINGLE STUD WIDTH. ANY STUD MAY BE BORED OR DRILLED, PROVIDED THAT THE DIAMETER OF THE RESULTING HOLES IS NO GREATER THAN 40% OF THE STUD WIDTH. THE EDGE OF THE HOLE IS NO CLOSER THAN 5/8 INCH TO THE EDGE OF THE STUD, AND THE HOLE IS NOT LOCATED IN THE SAME SECTION AS A CUT OR NOTCH.

GENERAL NOTES
BLOCK WEBS SOLID AT BEARING WALL LOCATIONS ABOVE CONTRACTOR TO EXTEND ALL POSTS DOWN TO SOUND FOUNDATION. INSTALL FULL DEPTH SOLID BLOCKING AT ALL POINT LOAD LOCATIONS.
ALL FOOTINGS TO EXTEND DOWN TO FROST LEVEL MIN.
INDICATES LOCATION OF POINT LOAD ABOVE
INDICATES LOCATION OF BEARING WALL ABOVE
COORDINATE EXACT LOCATIONS OF FLOOR DRAIN WITH MECH CONTRACTOR

STEEL LINTEL SCHEDULE

PROVIDE STEEL LINTELS AS PER THE FOLLOWING SCHEDULE IN MASONRY WALL OPENINGS WHEN NOT SHOWN ON DRAWINGS, OR IN OPENINGS REQUIRED BY THE ARCHITECTURAL, MECHANICAL, AND ELECTRICAL DRAWINGS.
L3 1/2 x 3 1/2 x 1/2 x 1/4 FOR OPENINGS UP TO 4'-0"
L4 3 1/2 x 5/16 FOR OPENINGS FROM 4'-1" TO 6'-0"
L5 3 1/2 x 5/16 FOR OPENINGS FROM 6'-1" TO 7'-0"
W8 x 18 with 5/16 PLATE FOR OPENINGS FROM 7'-1" TO 10'-0"
FOR OPENINGS GREATER THAN 10'-0" AND NOT SHOWN ON PLANS, ALLOW FOR MINIMUM BEAM WEIGHT OF 38 PLF PLUS A 5/16" x 11" BOTTOM PLATE
ALL LINTELS SHALL BEAR ON 8" OF SOLID MASONRY, UNO.
USE ONE ANGLE FOR EACH 4" WHYTE OF MASONRY. PLATES ARE TO BE 1" LESS THAN NOMINAL WALL THICKNESS.
MINIMUM THICKNESS OF LINTELS IN EXTERIOR WALLS TO BE 5/16"
ANGLES OR PLATES IN EXTERIOR WIDTHS OF MASONRY WALLS TO BE HOT DIPPED GALVANIZED.
FOR MULTI-WYTHE WALLS WITH AIR SPACES, CONTRACTORS IS TO INCLUDE (6) ADDITIONAL ANGLES, PLATES, AND CHANNELS TO CLOSE OFF AIRSPACE AT LINTEL LOCATIONS. SEE DETAILS ON DRAWINGS. IF NO DETAILS ARE SHOWN, CONTACT ENGINEER FOR FURTHER INFORMATION AND DETAILS.

BEAM SPLICE DETAILS

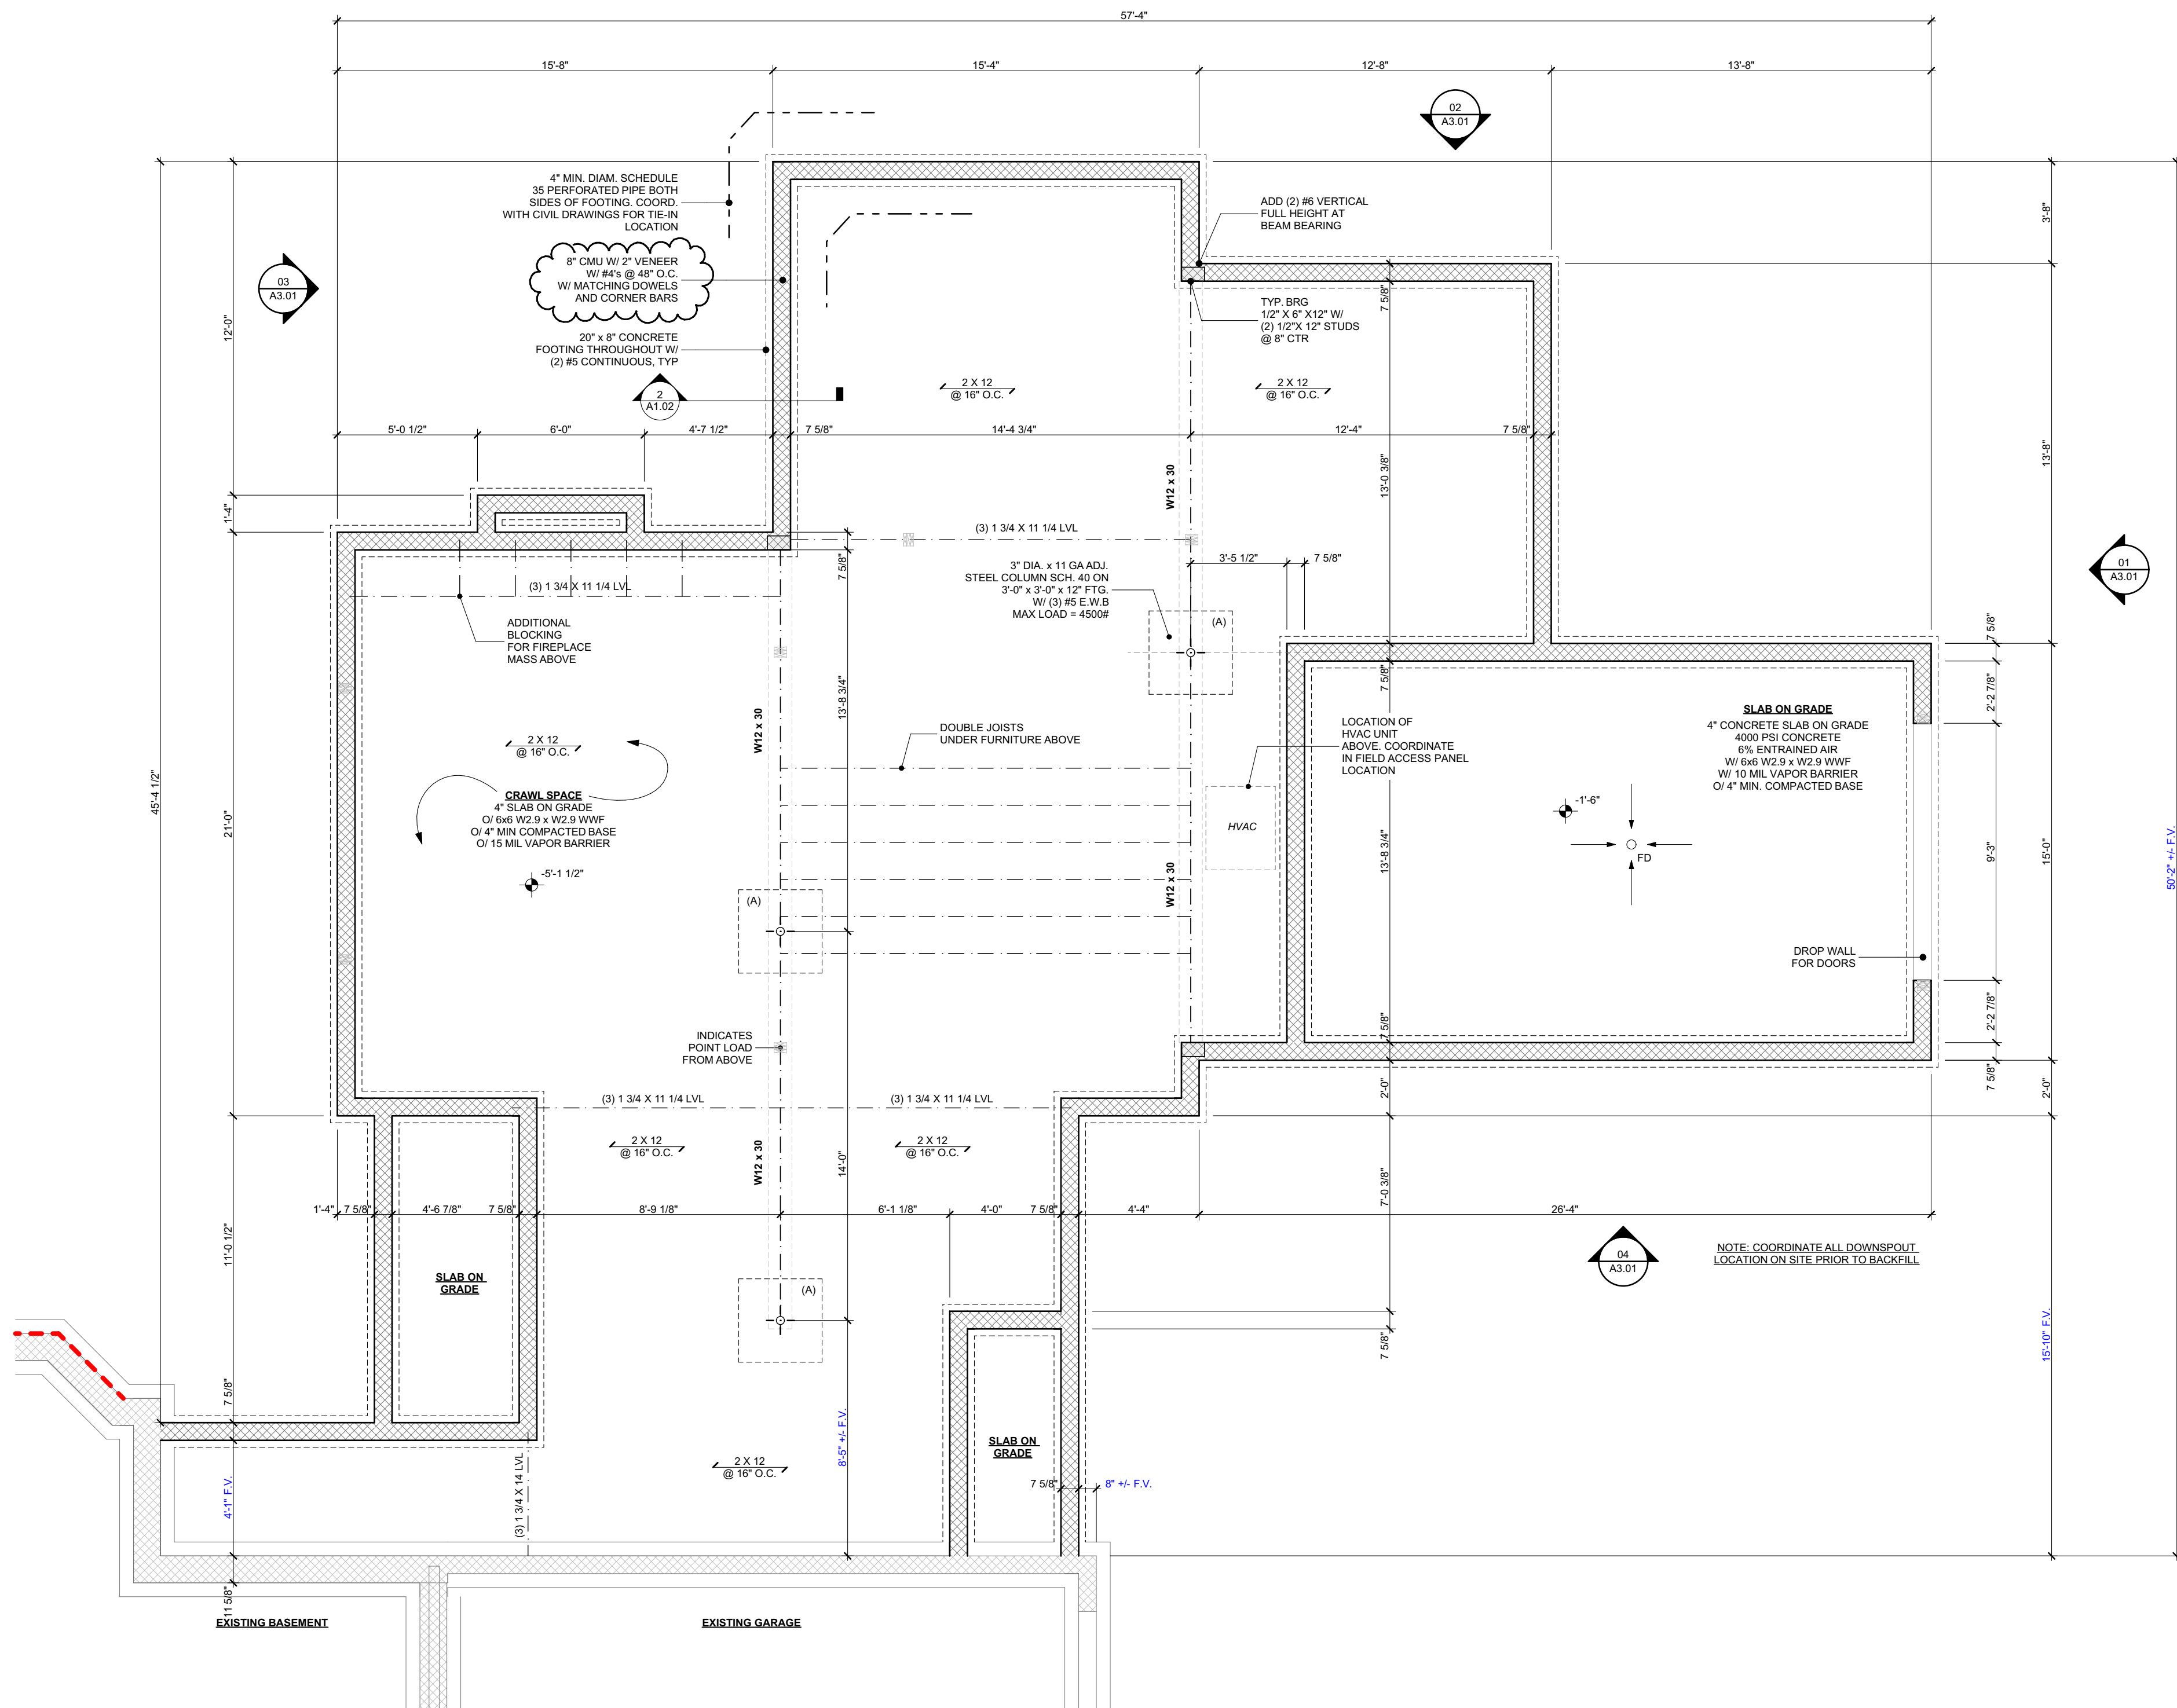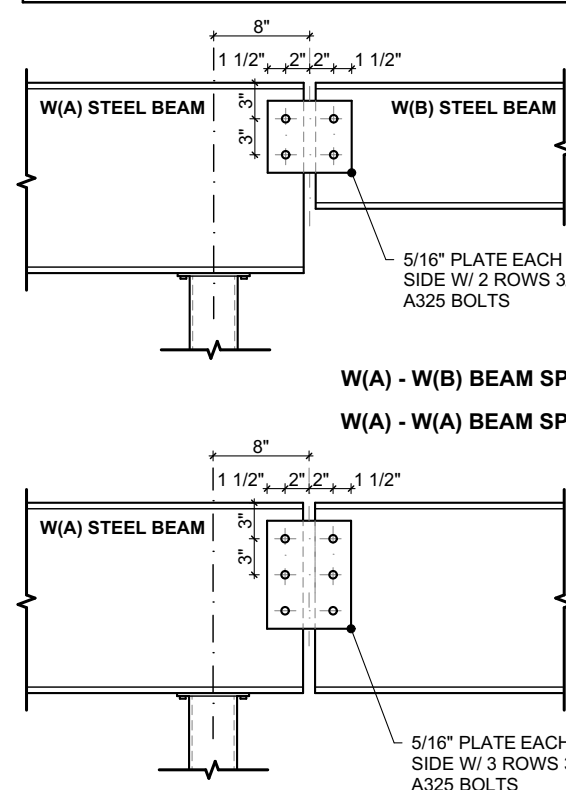

1 FOUNDATION PLAN
SCALE: 1/4" = 1'-0"

FLOOR PLAN GENERAL NOTES

VERIFY DIMENSIONS AND CONDITIONS IN FIELD. WHEN DIMENSIONS AND/OR CONDITIONS AS INDICATED ON DRAWINGS CONFLICT WITH ACTUAL, CONTACT ARCHITECT FOR CLARIFICATION.
PROVIDE SOUND DEADENING INSULATION AROUND BEDROOMS, BATHROOMS, MECHANICAL ROOMS, AND PLUMBING STACKS.
BLOCK WEBS SOLID AT BEARING WALL LOCATIONS ABOVE.
CONTRACTOR TO EXTEND ALL POSTS DOWN TO SOUND FOUNDATION. INSTALL FULL DEPTH SOLID BLOCKING AT ALL POINT LOAD LOCATIONS.

ALL FOOTINGS TO EXTEND DOWN TO FROST LEVEL MIN.
COORDINATE EXACT LOCATIONS OF FLOOR DRAIN WITH MECH CONTRACTOR.
PROVIDE 5/8" GYP BOARD TYPE "X" ON GARAGE CEILINGS.
ALL INTERIOR DOORS TO BE 1 7/8" SOLID CORE WOOD DOORS. COORDINATE WITH FINISH PLANS FOR FINAL FINISH SELECTIONS.
ALL INTERIOR TRIM TO BE POPLAR OR APPROVED EQUAL. COORDINATE WITH INTERIOR ELEVATIONS AND MILLWORK DRAWINGS FOR SELECT TYPES AND PROFILES.
ALL MILLWORK TO BE CUSTOM PER DRAWINGS.
REFER TO CONSULTANT DRAWINGS IF APPLICABLE FOR COORDINATION OF WORK BETWEEN TRADES.

WOOD HEADERS (U.N.O.)
OPENING HEADERS NON-BEARING BEARING
UP TO 4'-0" (2) 2 X 8 1 JACK 1 KING 1 JACK 1 KING
4'-0" - 8'-0" (2) 2 X 10 1 JACK 1 KING 2 JACK 1 KING
8'-1" - 8'-0" (2) 2 X 12 1 JACK 1 KING 2 JACK 1 KING
8'-1" - 10'-0" (2) 11 H4 LVL 2 JACK 1 KING 3 JACK 1 KING

INDICATES WEB STIFFENING BELOW BEARING WALL ABOVE
INDICATES AREA OF ADDITIONAL FRAMING REQUIRED
INDICATES POINT LOAD FROM ABOVE
INDICATES LOCATION OF BEARING WALL ABOVE
INDICATES BEARING WALL

DOOR SCHEDULE INTERIOR

NO.	DOOR LEAF				REMARKS
	WIDTH	HEIGHT	MAT	TYPE	
101A	1	2	SC WOOD	B	7, 8
101B	1	2	SC WOOD	B	7, 8
102A	1	2	SC WOOD	C	3
103A	1	2	SC WOOD	A	
104A	1	2	SC WOOD	A	
105A	1	2	INSUL. MTL.	D	1, 2
107A	1	2	SC WOOD	C	3
110B	1	2	SC WOOD	A	
3070	1	2	SC WOOD	---	
3080	1	2	SC WOOD	---	


DOOR GENERAL NOTES

HARDWARE AND ACCESSORIES TO BE COORDINATED WITH THE FINISH PLANS. SUBMIT SAMPLE FOR APPROVAL.
ALL EXTERIOR HARDWARE, LOCKSETS, AND SCREENS TO BE COORDINATED WITH SELECT MFG. PRIOR TO ORDERING.
ALL INTERIOR DOORS TO BE 1 7/8" SOLID WOOD CORE. REFER TO FINISH PLAN FOR FINISH MATERIAL.
REFER TO EXTERIOR ELEVATIONS FOR ALL EXTERIOR DOOR TYPES AND SCHEDULES.

DOOR SCHEDULE REMARKS

- 20 MIN. RATED DOOR W/ SELF-CLOSING HARDWARE.
- THRESHOLD AND WEATHERSTRIPPING.
- POCKET DOOR HARDWARE SET. COORDINATE LOCKABLE/PASSAGE SET W/ OWNER PRIOR TO ORDERING.
- HIDDEN DOOR BY MILLWORK SUPPLIER.
- ALL GLASS DOOR IN GLASS PARTITION.
- ARCHED TOP DOOR.
- LOUVER EACH DOOR PANEL PER MEP CONTRACTOR.
- PAIR OF DOORS.

DOOR TYPES - INTERIOR

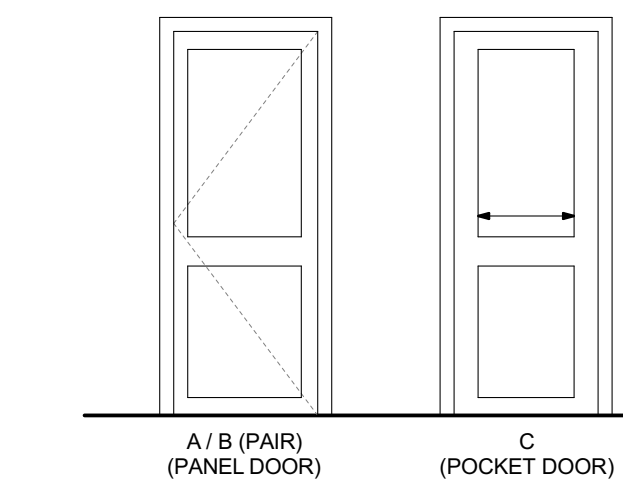


2 SECOND FLOOR PLAN

SCALE: 1/4" = 1'-0"


1 FIRST FLOOR PLAN

SCALE: 1/4" = 1'-0"




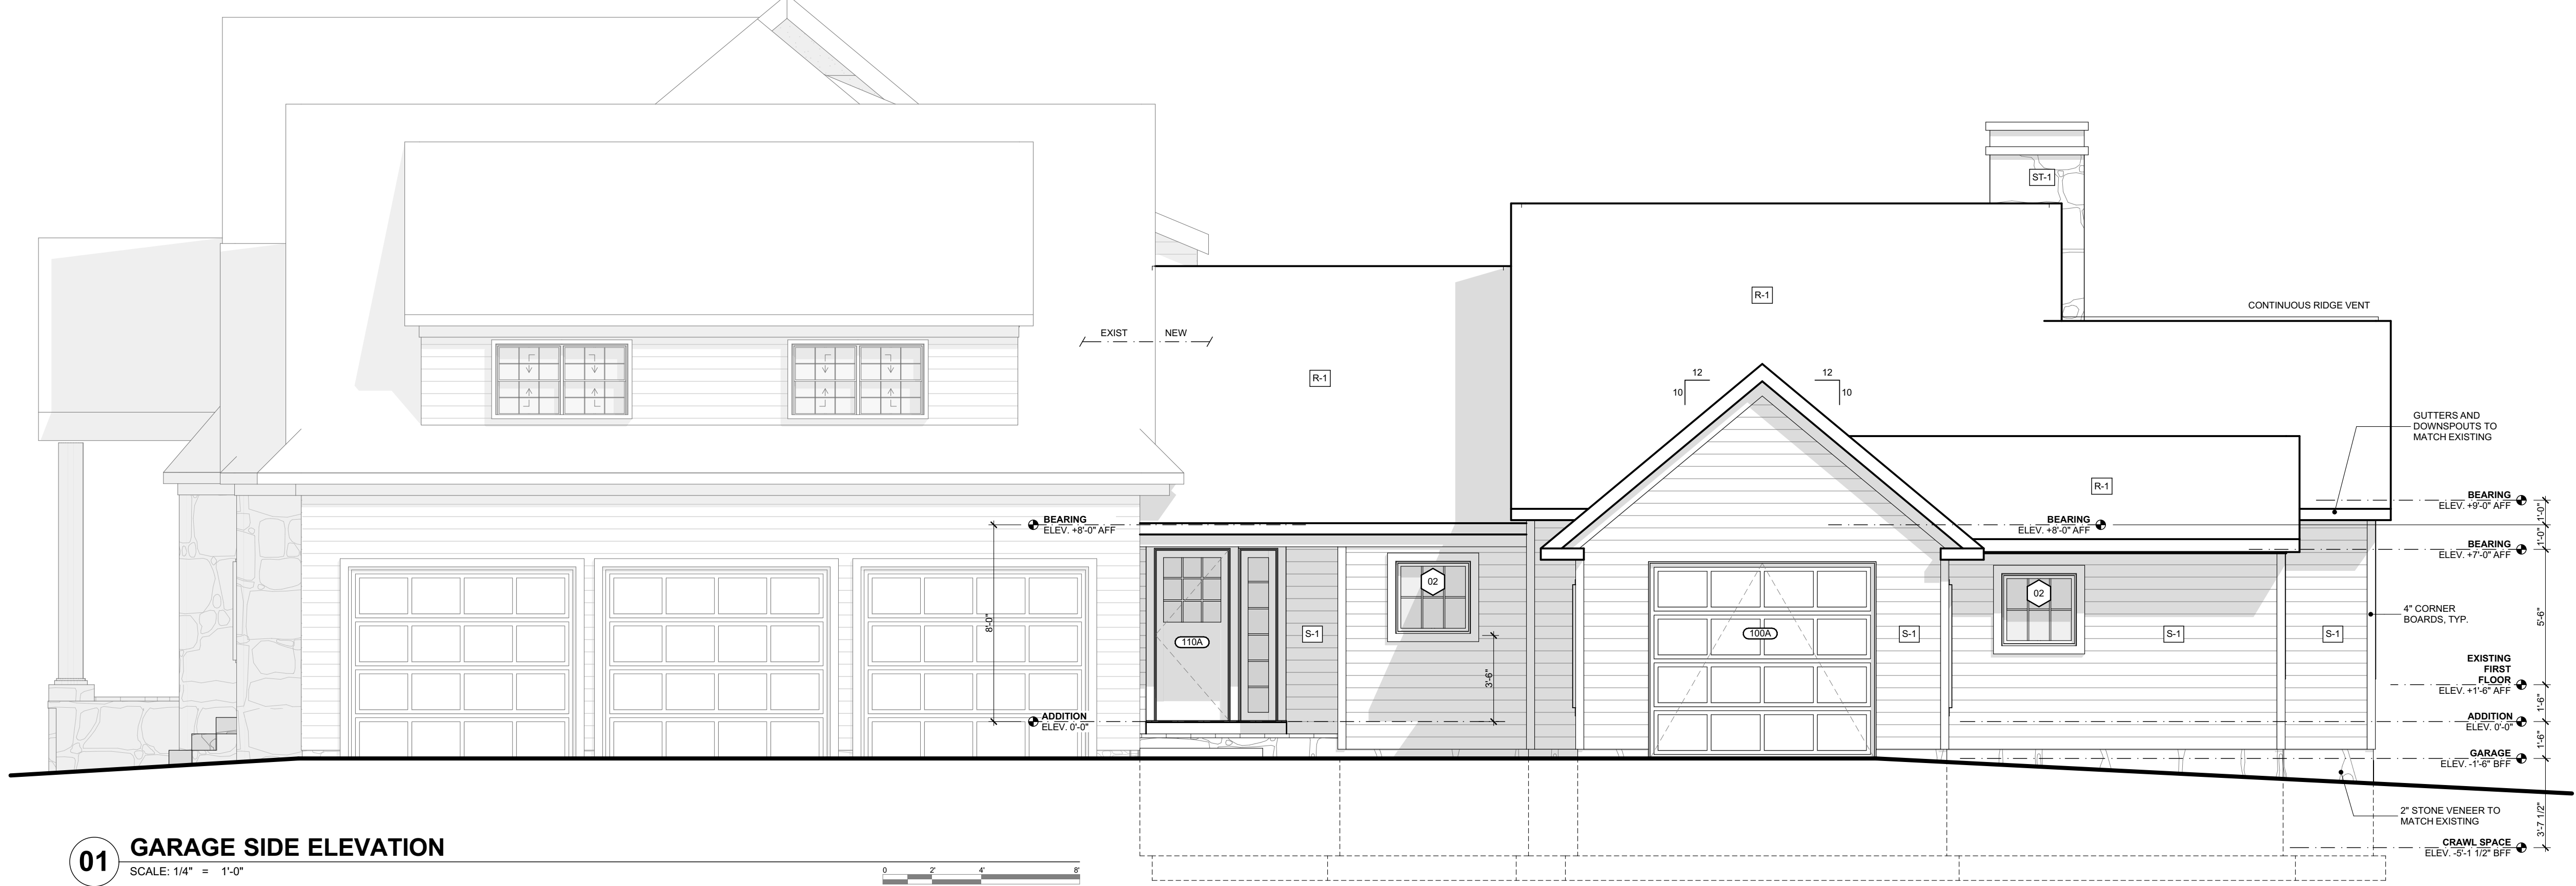


01 GARAGE SIDE ELEVATION
SCALE: 1/4" = 1'-0"

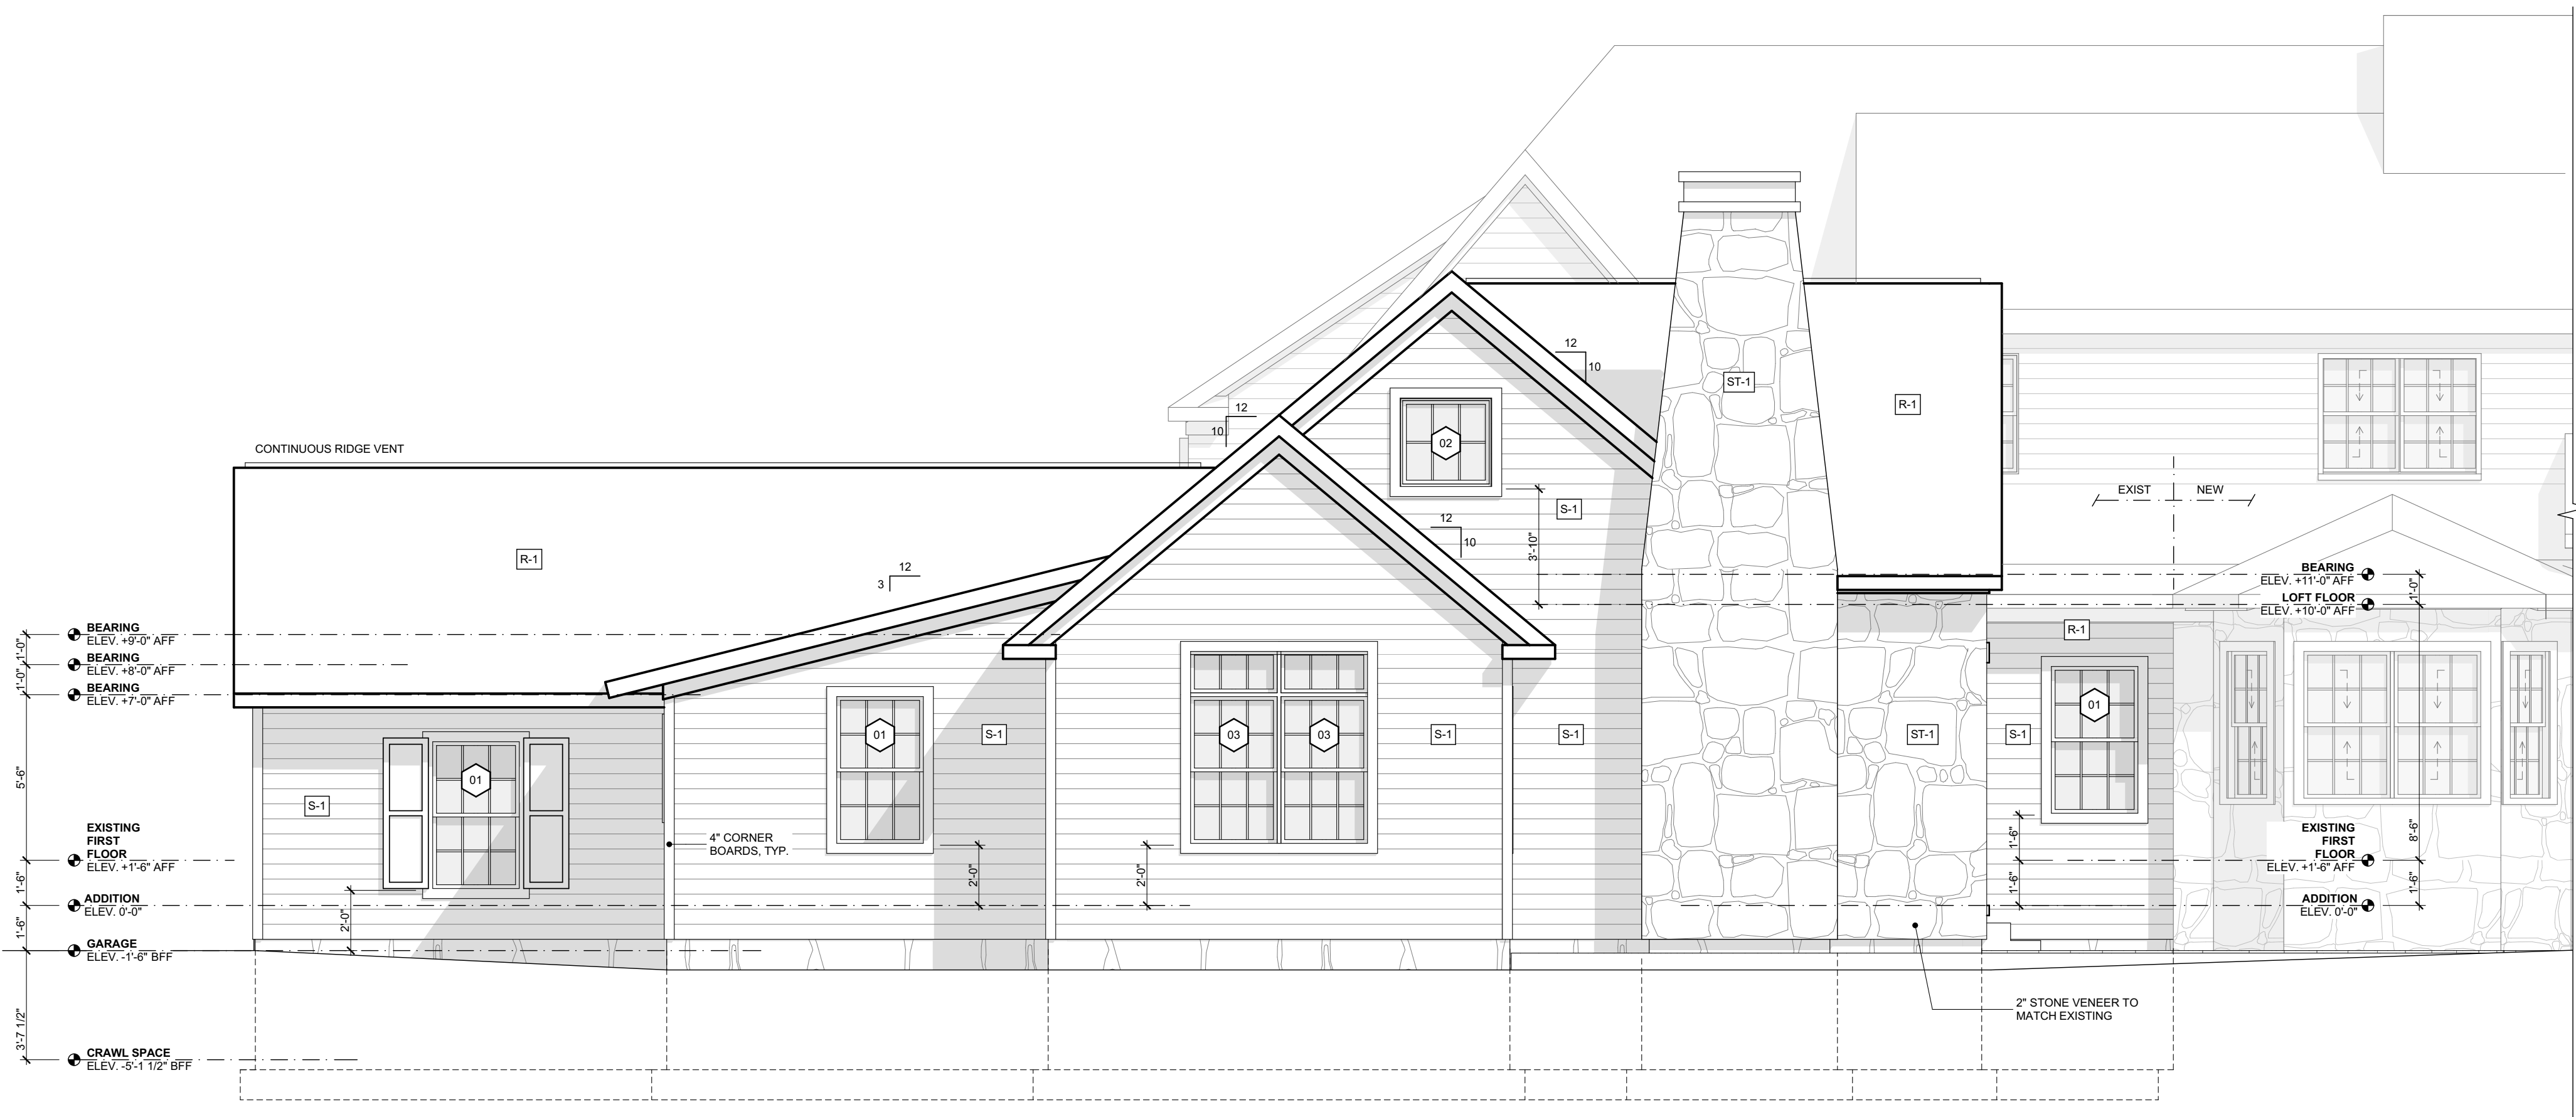

02 SIDE ELEVATION
SCALE: 1/4" = 1'-0"

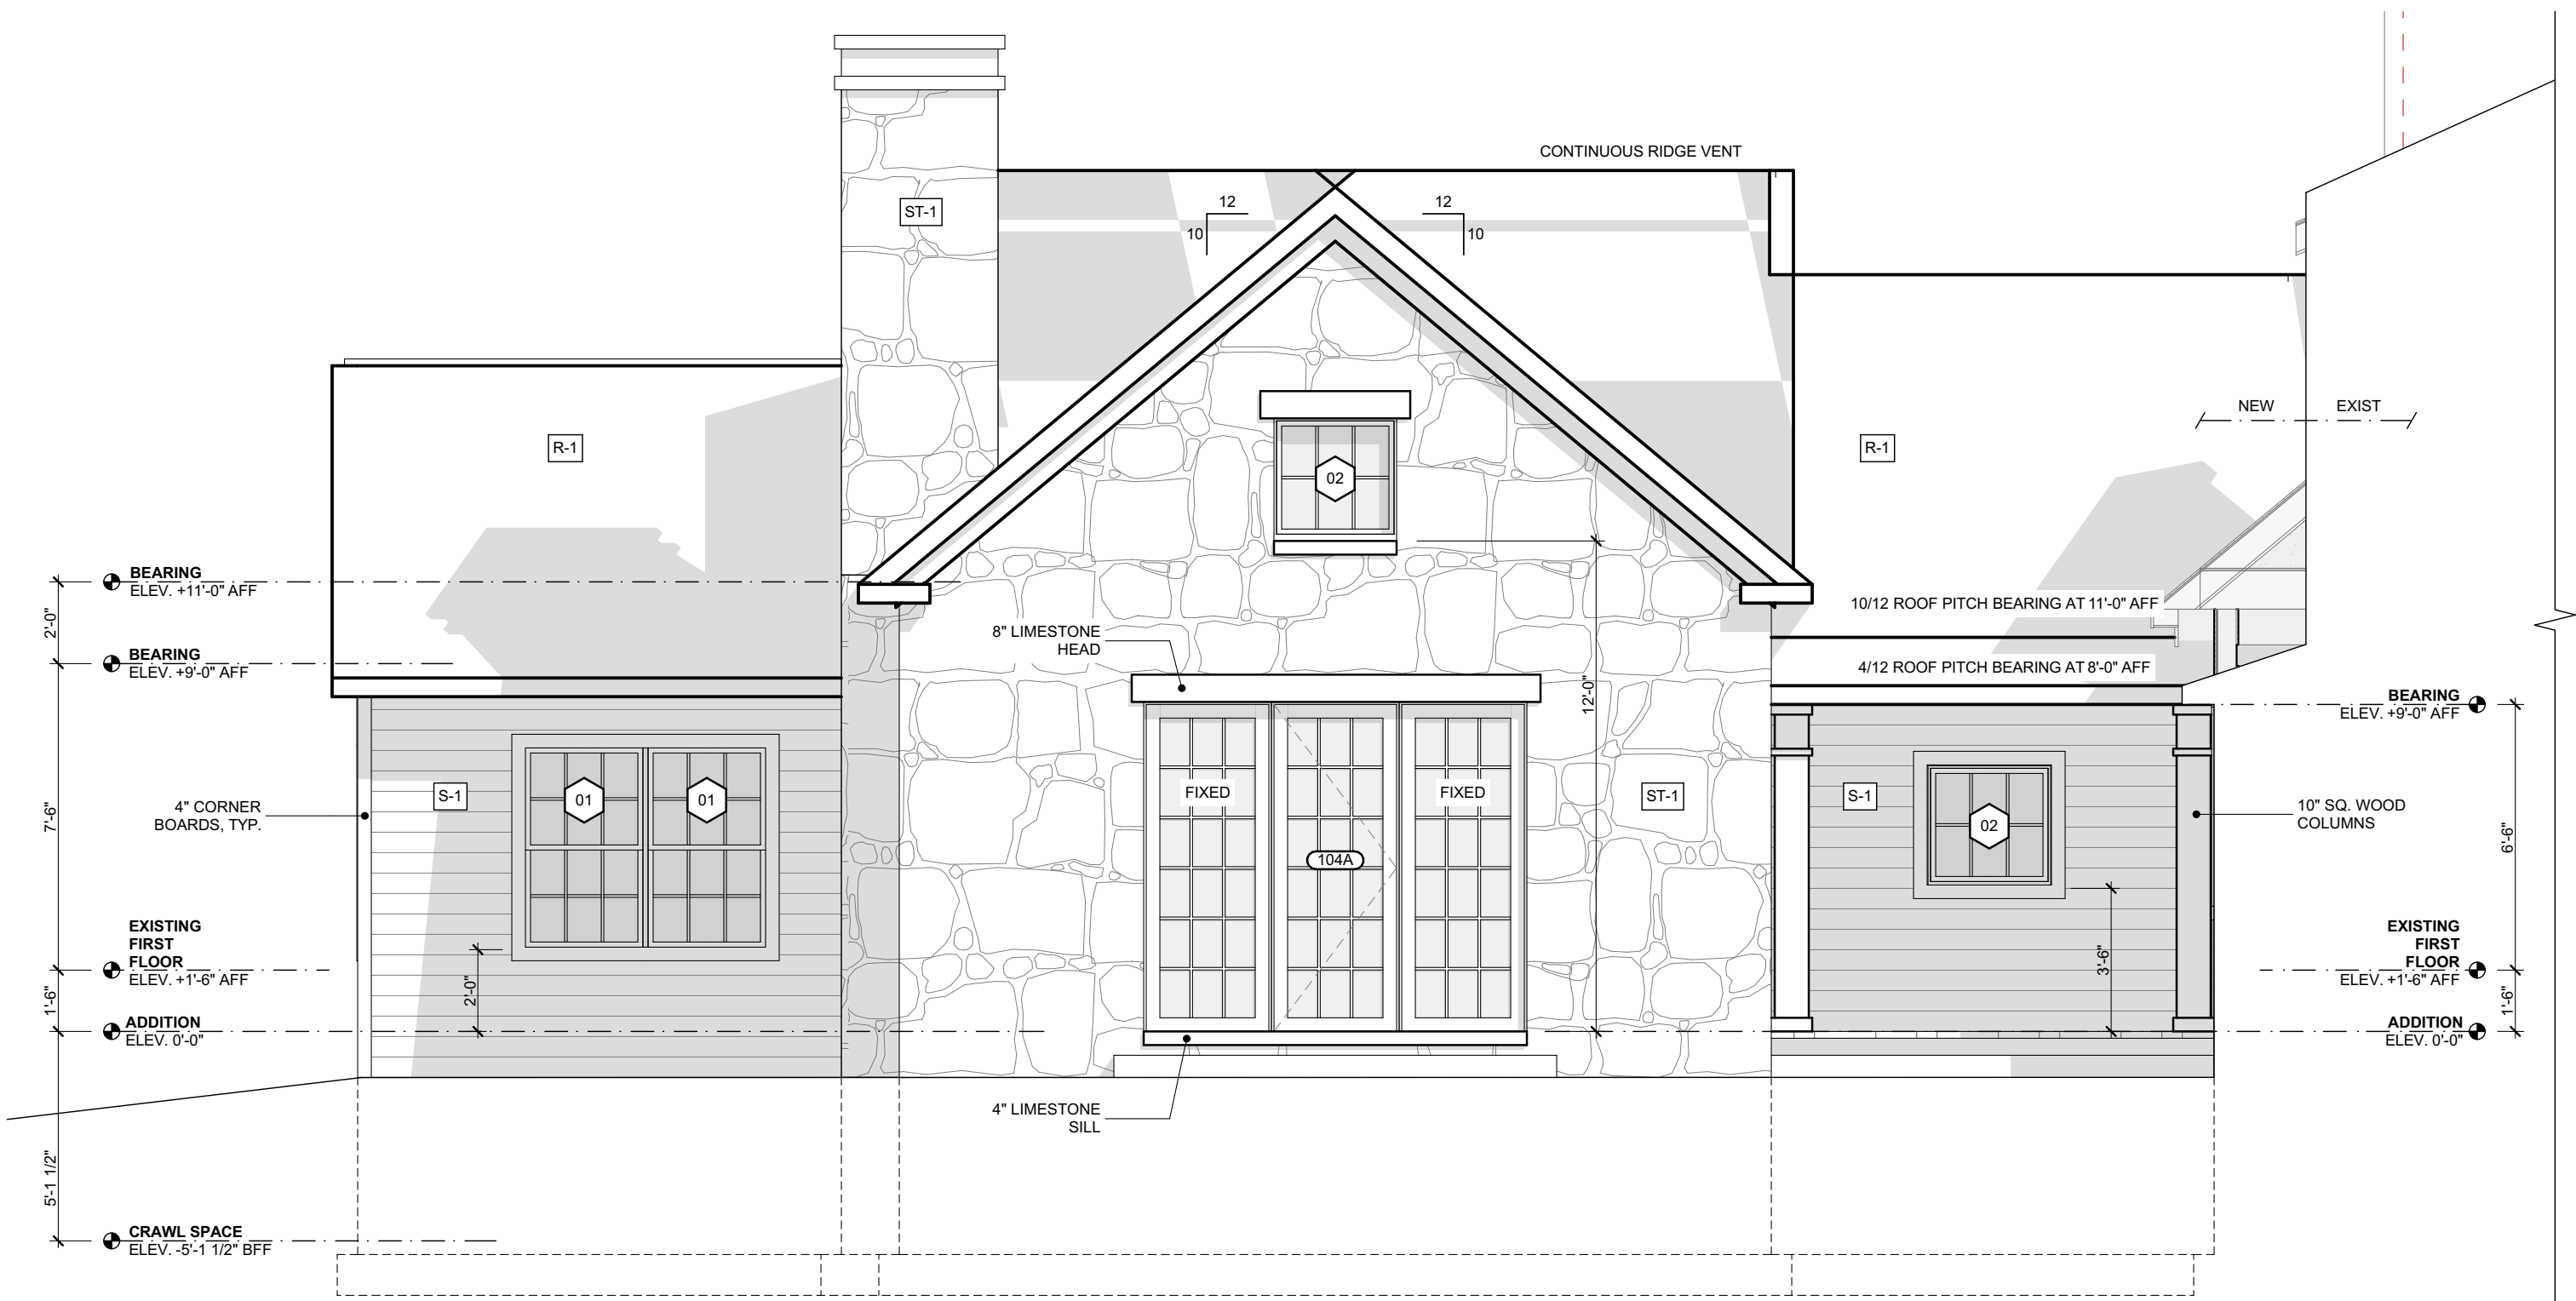

03 REAR ELEVATION
SCALE: 1/4" = 1'-0"

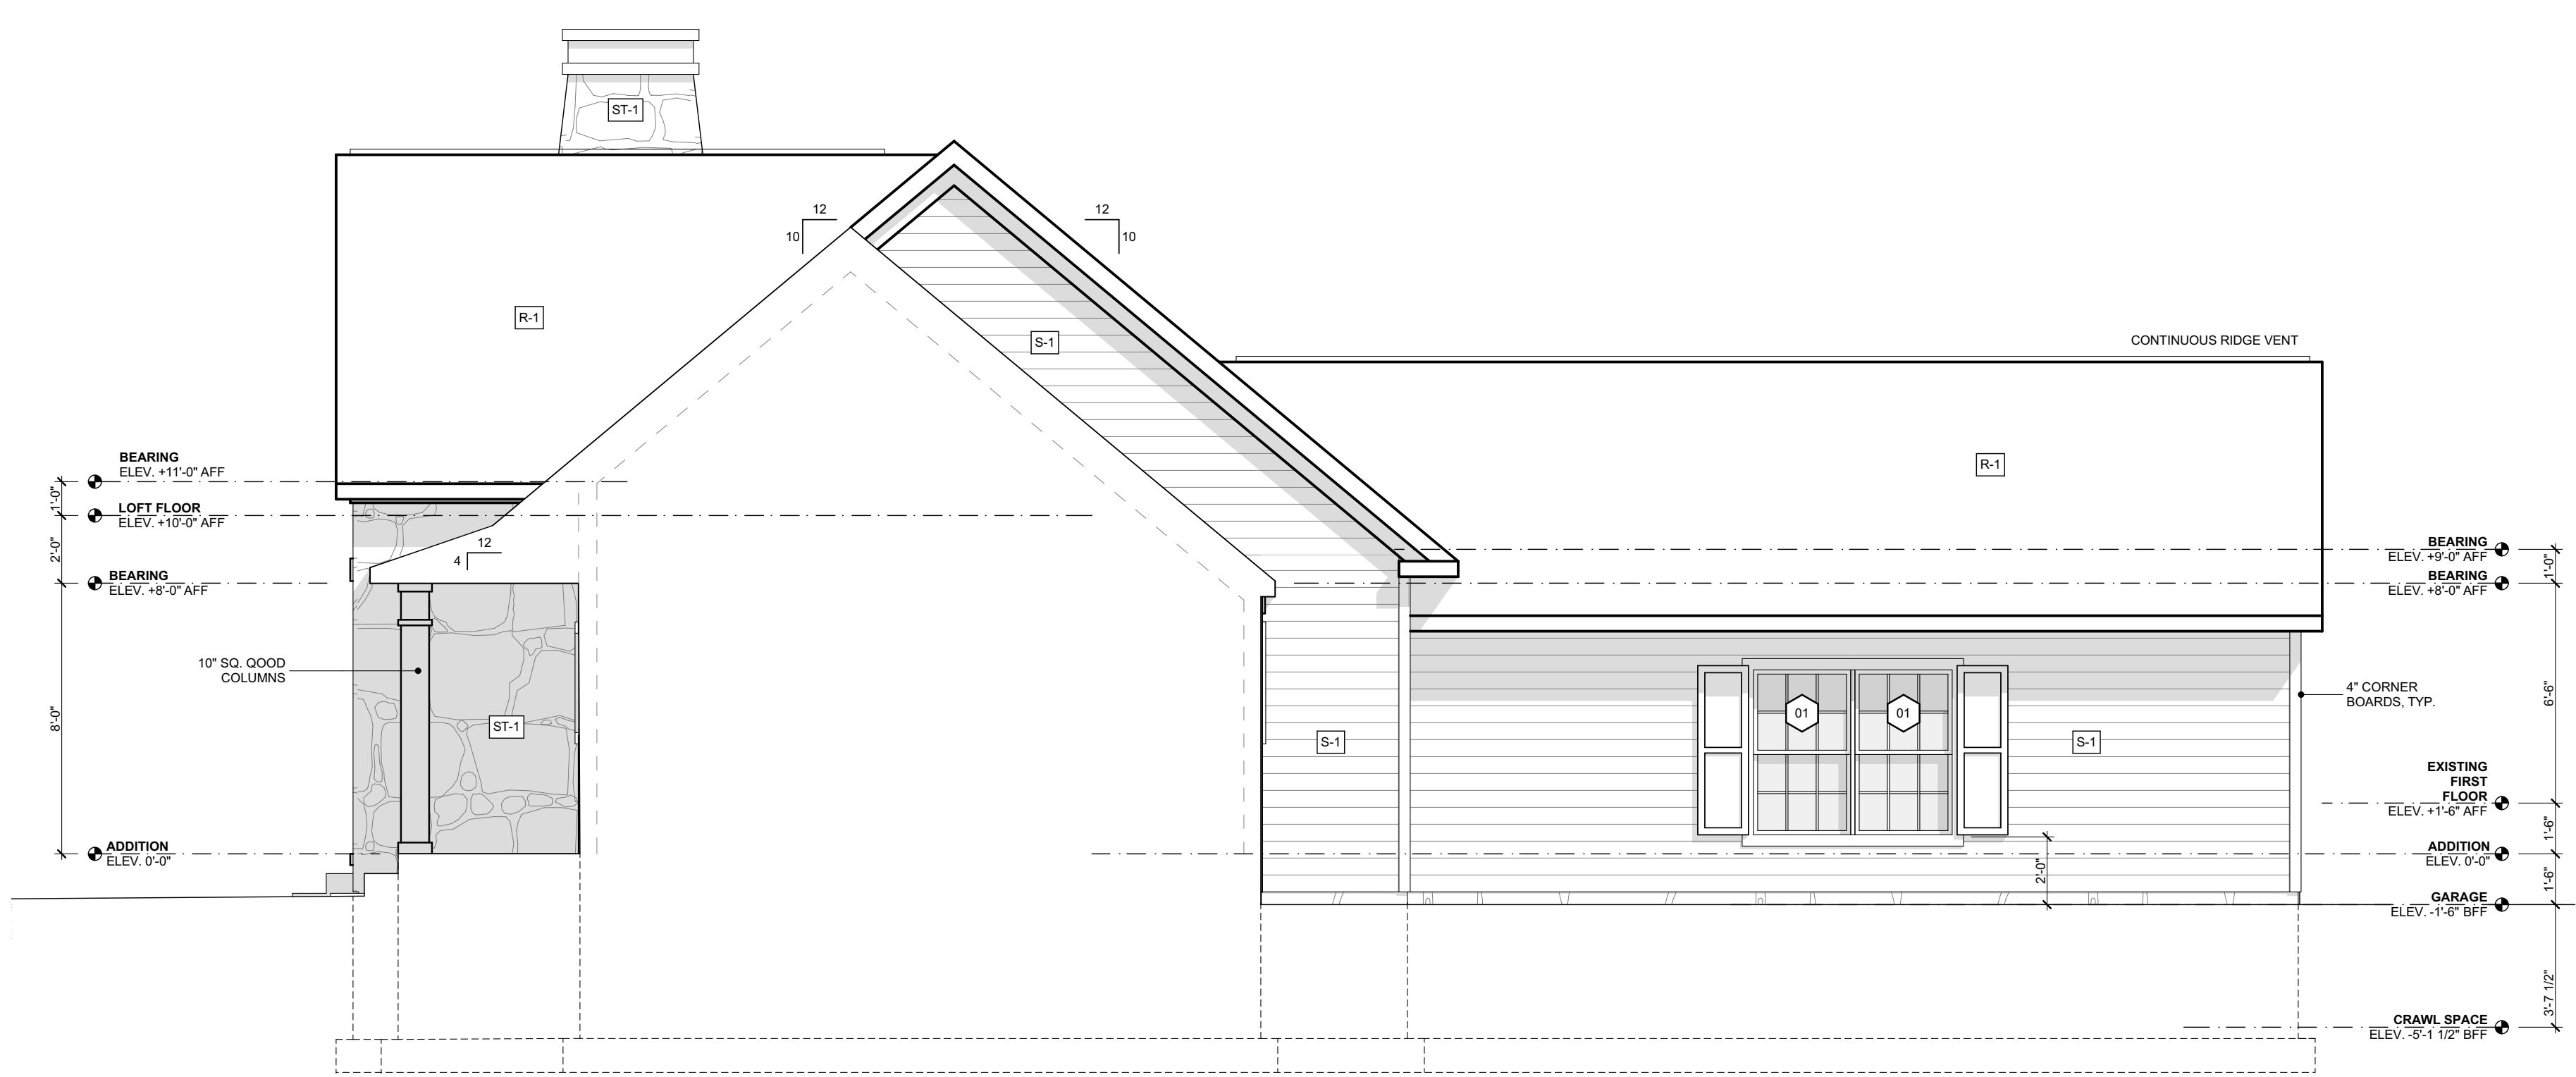

04 FRONT ELEVATION
SCALE: 1/4" = 1'-0"

MATERIAL SCHEDULE

ALL MATERIAL ASSEMBLIES LISTED BELOW TO OCCUR OVER THE FOLLOWING UNLESS NOTED OTHERWISE:

0" WEATHER BARRIER
0" 1/2" EXTERIOR GRADE OSB SHEATHING
0" 2X6 STUDS W/ R-19 MIN. MINERAL WOOL INSULATION

STONE VENEER (S-1)
2" STONE VENEER TO MATCH EXISTING

0" GROUT & METAL LATHE
0" KEENE RAINSCREEN

VINYL SIDING (S-1)
VINYL SIDING TO MATCH EXISTING

0" TYLES STUCCO WRAP

ASPHALT SHINGLE ROOF (R-1)
30 YEAR ARCHITECTURAL SHINGLE TO MATCH EXISTING

0" MANUFACTURER'S RECOMMENDED UNDERLAYMENT
OF 1/8" APPLIED EXTERIOR GRADE SHEATHING. ICE GUARDS SHOULD BE INSTALLED AT ALL EAVES AND VALLEYS, UP, 27" AND WRAPPED OVER THE FACE OF ALL FASCIAS.

EXTERIOR ELEVATION GENERAL NOTES

ROOF SOFFITS TO BE AC PL YWOOD WITH A CONTINUOUS LINEAR VENT UNLESS NOTED OTHERWISE.

ALL EXTERIOR TRIM TO BE AZEK OR BORAL, PAINTED, OR APPROVED EQUAL.

ALL EXPOSED WOOD ELEMENTS AND TONGUE AND GROOVE CEILING IS TO BE DOUG FIR, STAINED AND SEALED. COORDINATE FINAL COLOR WITH ARCHITECT AND OWNER.


ALL ROOF PENETRATIONS TO BE COORDINATED WITH ARCHITECT PRIOR TO INSTALLATION TO ENSURE AESTHETIC EXPECTATIONS ARE MAINTAINED.

GUTTERS AND DOWNSPOUTS ARE TO MATCH EXISTING.

SAFETY GLAZING TO BE IN ACCORDANCE WITH THE 2019 RESIDENTIAL CODE OF OHIO (SECTION R308).

BEDROOM EGRESS WINDOWS TO COMPLY WITH THE 2019 RESIDENTIAL CODE OF OHIO (SECTION R310).

WINDOW LEGEND

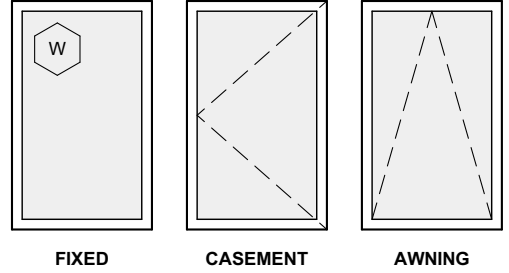

BASIS OF DESIGN:

WINDOWS ARE TO BE ANDERSON "E" SERIES ALUMINUM CLAD WOOD OR APPROVED EQUAL.

WINDOW HEAD GIVEN ABOVE FIRST AND SECOND FLOOR, CONFIRM WINDOW QUANTITIES WITH ELEVATIONS.

** WINDOW COUNT PROVIDED FOR GENERAL REFERENCE AND VERIFICATION ONLY. CONTRACTOR TO VERIFY TOTAL NUMBER OF WINDOWS WITH DOCUMENTS.

WINDOW SCHEDULE

ID	QTY.	W X H	TYPE	REMARKS
01	7	1x2	DOUBLE HUNG	
02	5	1x1	AWNING	
03	2	1x2	DOUBLE HUNG	WITH 18" HIGH TRANS.

DOOR SCHEDULE - EXTERIOR

NO.	DOOR LEAF				REMARKS
	WIDTH	HEIGHT	MAT	TYPE	
100A	3	2	INSUL. MTL.	A	GARAGE DOOR
104A	1	2	ALUM / W/D	B	
104B	1	2	ALUM / W/D	B	FIXED
104C	1	2	ALUM / W/D	B	FIXED
110A	1	2	ALUM / W/D	C	
110C	0	2	ALUM / W/D	B	SIDE LIGHT
111A	1	2	ALUM / W/D	B	







