

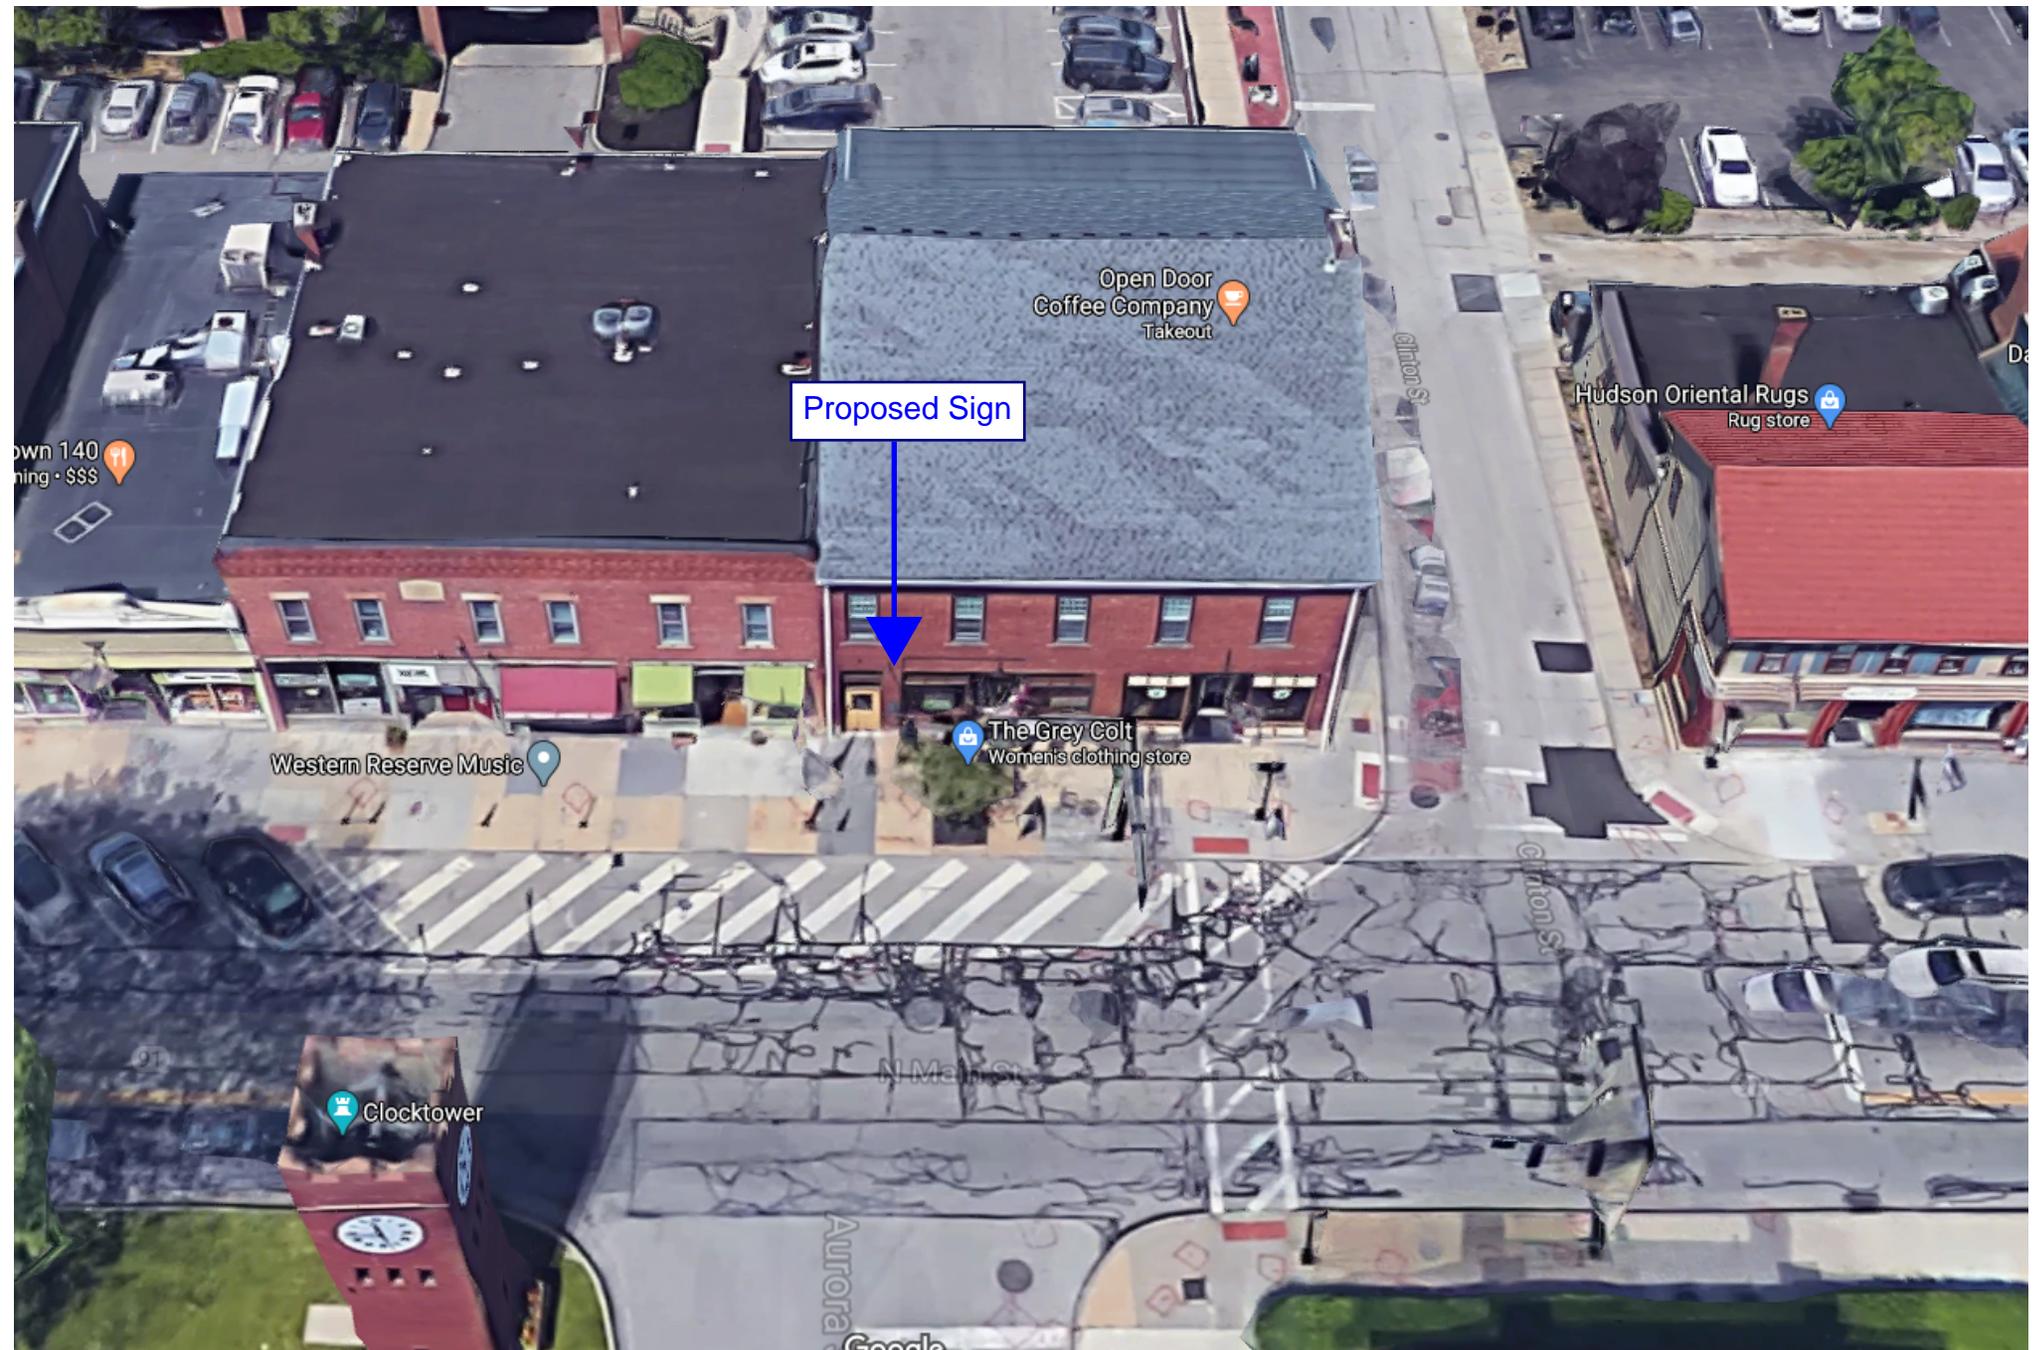
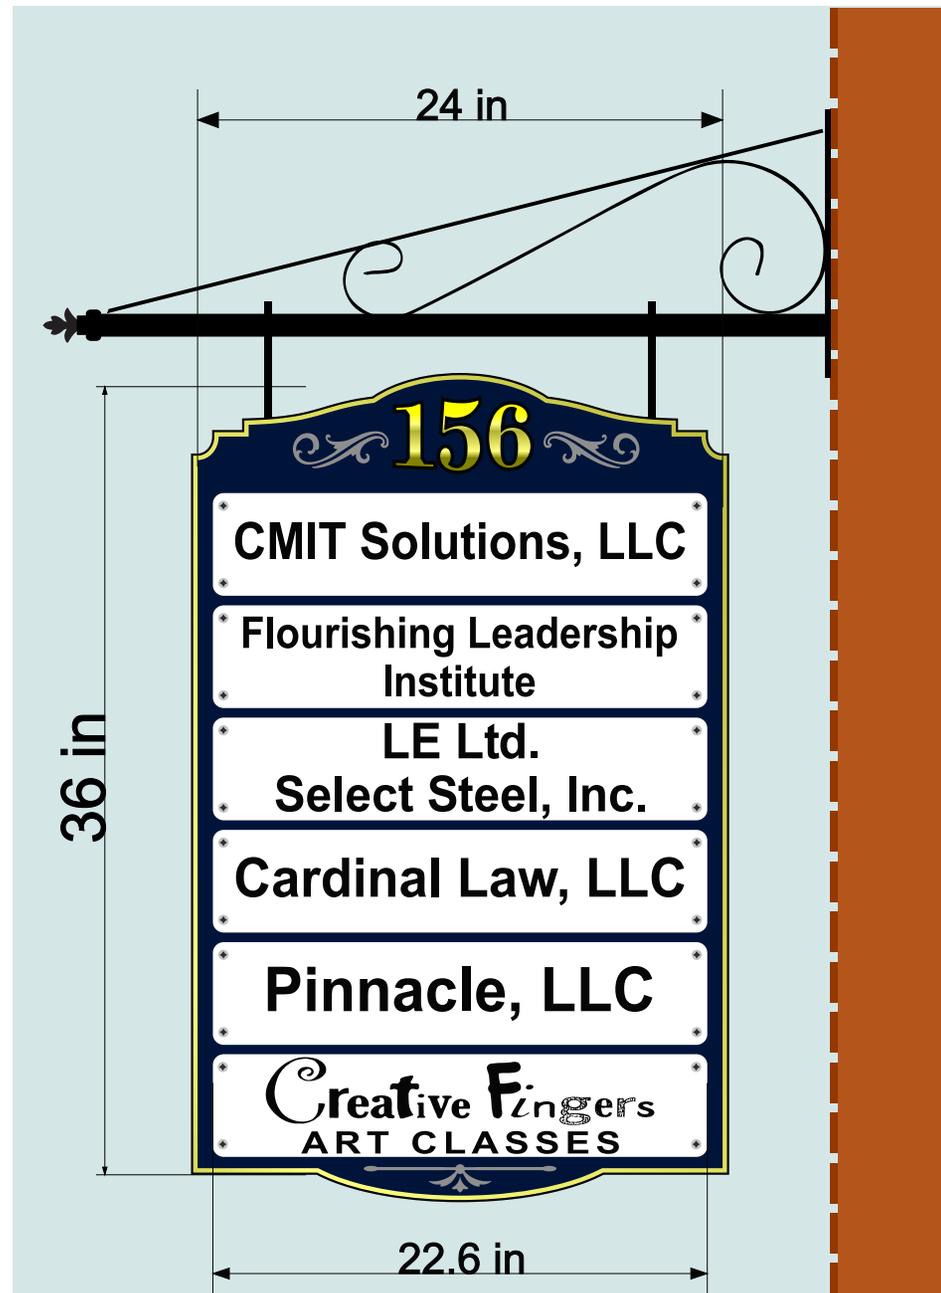


Site Plan



Stainless inserts installed into sign panel and stainless pan head screws secure ACM tenant panels.

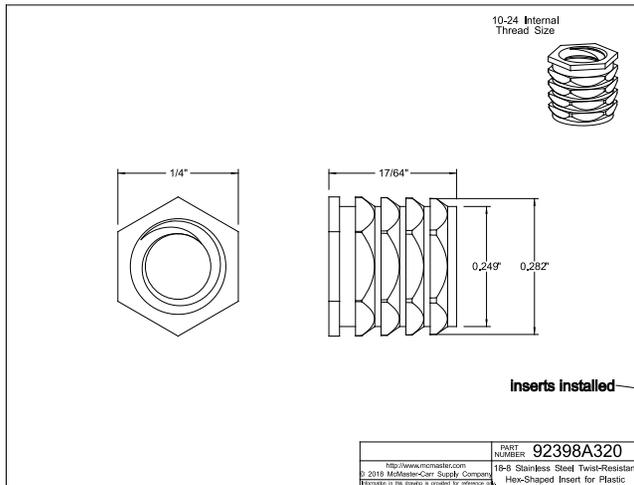

Sign panel is (2) 3/4" pvc panels with Vcarve address and decorations, laminated together. Primed and painted steel hanger bars are laminated into the panel also for a permanent, secure fit. Main panel is painted a satin finish in a Dark Blue or Black. Aluminum Composite Material (ACM) panels are secured to main panel by Stainless steel inserts and stainless screws. Graphic are HP cut vinyl for tenant names. Sign is installed to existing bracket.



Looking North



Looking South

