


Detailed Explanation of Project*

Remove all existing roof material on front house and reinstall Owen's Corning Duration limited lifetime shingles. New synthetic felt as underlayment, new ice and water shield installed along bottom eaves, chimneys and valleys, new EPDM in all trough gutters. Clean up and haul away all debris.

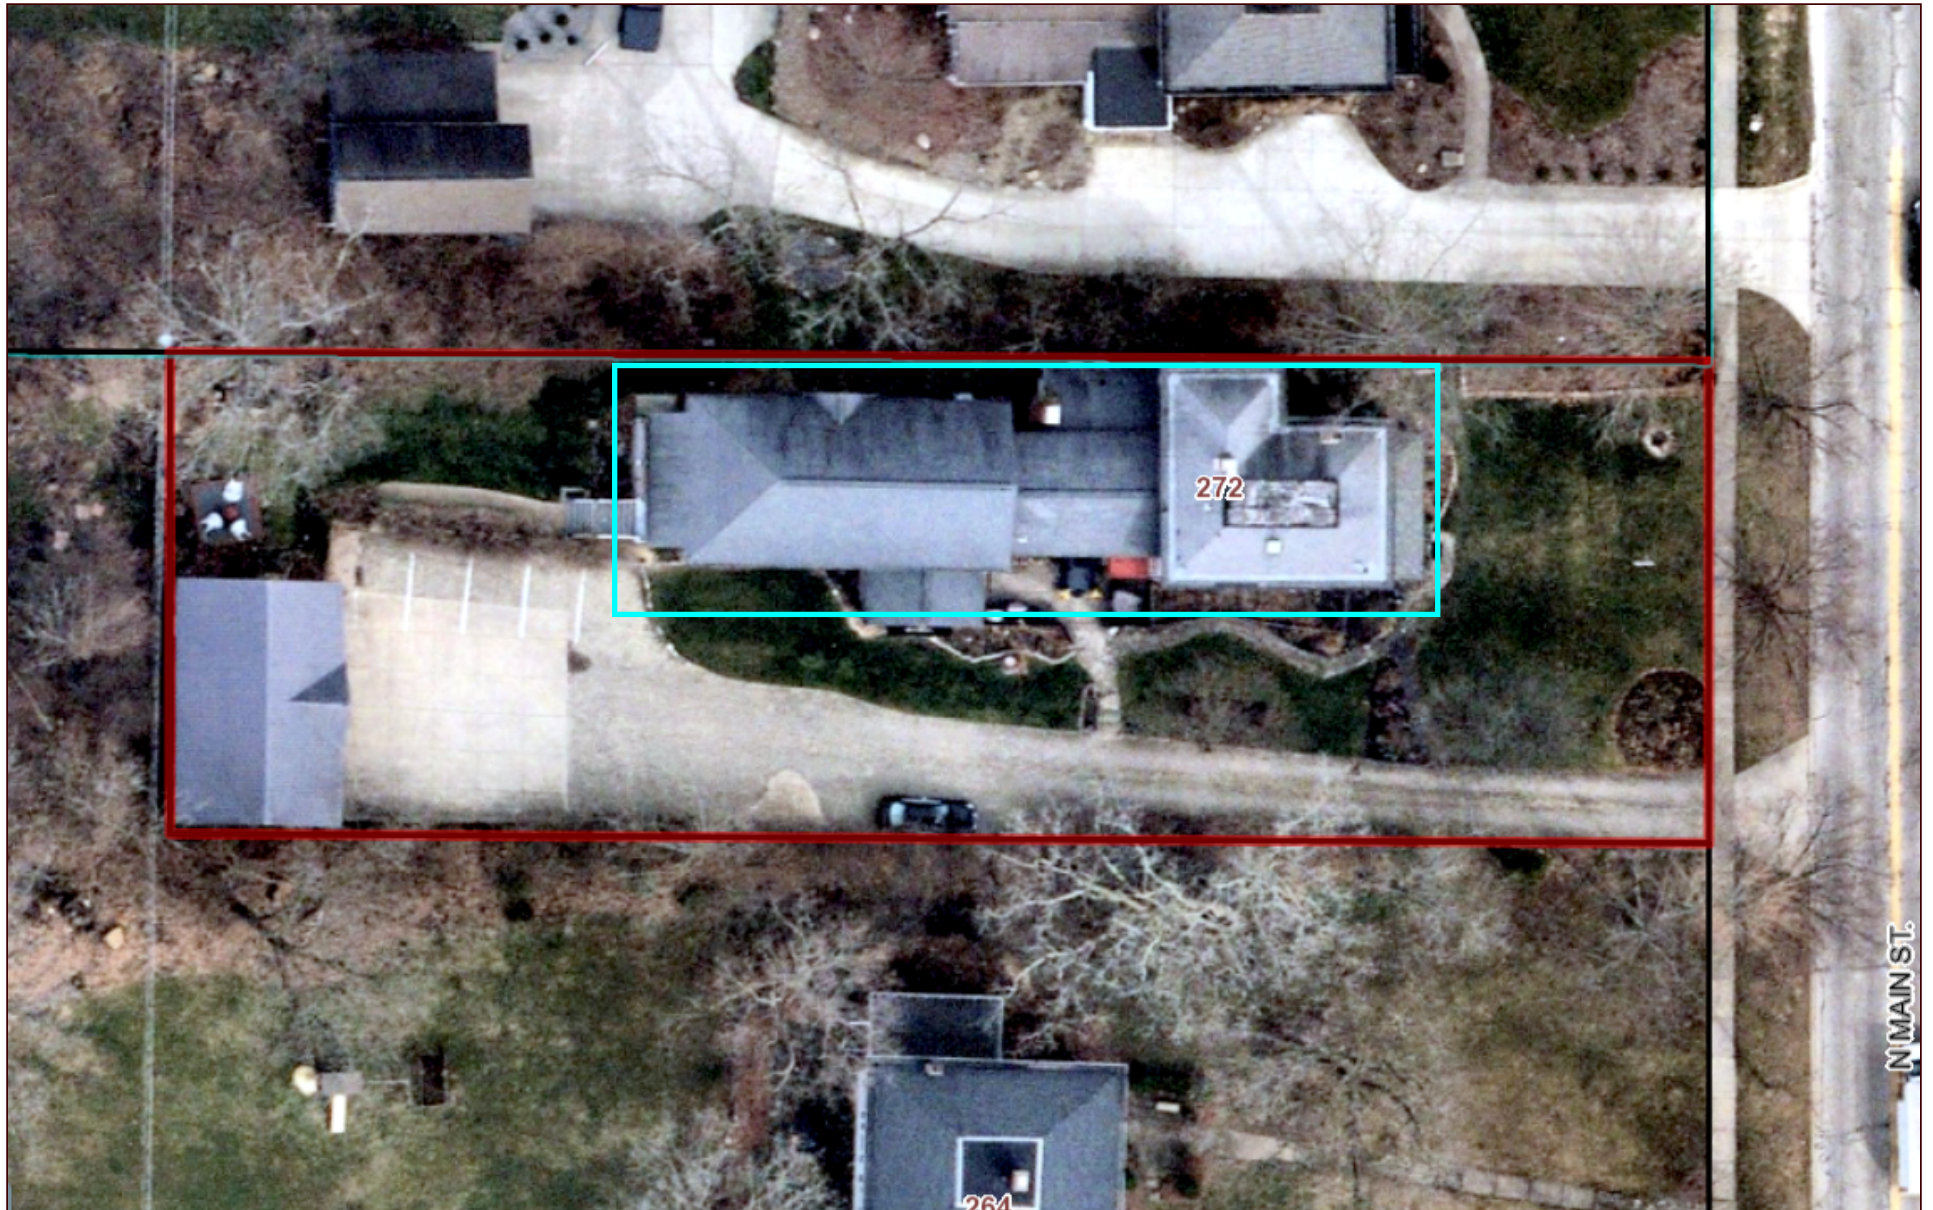

Patterson

"We're On Top of It"

ROOFING COMPANY

2609 Stewart Drive, Rittman, Ohio 44270

Mike Patterson
330-414-0613

Date: April 28, 2025

Ren and Doug Hardtmayer
272 N Main Street, Hudson, Ohio

FRONT MAIN

15 square, remove all existing roof material and reinstall Owens Corning Duration (Pacific Wave) limited lifetime shingles

New synthetic felt as underlayment

New ice and water shield installed along all bottom eaves and chimneys

Install approximately 6-8 new aluminum box vents

New aluminum stack collar and chimney flashings

1 1/4" coil nails as fasteners

Remove all flat roof material and reinstall 2-ply base and granulated cap sheet

Remove all existing trough gutter material and reinstall new wood or recovery board substrate as needed with 060 EDPM rubber through entire trough gutter system terminated with custom bent metal coping

Install new 3" drain outlets

1 dumpster clean up and haul away all debris with moveable dump trailer on tires



*Tarps will be laid over all bushes, flowers, and shrubs before any tearing off begins to insure no damage to your landscaping.
All gutters and downspouts are cleaned and inspected for proper water flow.