

SCHEDULE OF MATERIALS:

(REVISION DATE: 08-22-17)

POSTS:	6 X 6 PRESSURE TREATED LUMBER 4 X 4 PRESSURE TREATED LUMBER
COLUMNS:	USES OF EXISTING (#4) / HB&G (#3) NEW
JOIST(S):	2 X 10 / 2 X 8 PRESSURE TREATED LUMBER TYPICAL CONSTR. @ 16" O.C.
PORCH SURFACE:	AZEK PORCH DECK FLOORING
HEADERS & BEAMS:	10" LVL ENGINEERED LUMBER X3
ROOF RAFTERS:	2 X 8 SPF #1 LUMBER @ 16" O.C.
SHINGLES:	TO MATCH EXISTING. (CERTAINTED, HIGHLAND SLATE)
RAILING(S):	NEW WOODEN BALUSTERS & RAILINGS (CUSTOM)
STEP(S):	2 X 8 PRESSURE TREATED LUMBER / AZEK DECKING
PORCH CEILING:	2 ½" GREENBRIAR VINTAGE BEADED SOFFIT
EXTERIOR SOFFIT:	½" 7 PLY CABINET GRADE PLYWOOD
GUTTER(S):	TO WRAP AROUND PORCH ROOF, AND DRAIN RIGHT SIDE WEST ELEVATION, AND RIGHT SIDE NORTH ELEVATION.

Edge of Pavement

East Streetsboro Street - 60'

N89°39'00"W 691.48'(M)

Edge of Pavement

Conc.

Conc. Walk

N89°39'00"W

R/W

E.O.P.

Asphalt Drive

E.O.P.

Walk

Walk

S89°39'00"E 66.15'

66.40'

1/2" Iron Bar F

29.41'

8.0'

3.1'

14.7'

8.0'

3.1'

3.1'

10.8'

9.0'

12.0'

14.3'

20.1'

20.3'

20.3'

12.2'

4.71'

79.40'

20.3'

24.3'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

64.75'

8.0'

14.0'

16.4'

14.0'

14.0'

14.0'

14.0'

14.0'

14.0'

14.0'

14.0'

8.97'

6.1'

28.0'

4.0'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

171.16'

Peacock & B. Peacock #55475574

Harland Kuchenbecker & Betty Jané Kuchenbecker O.R. Vol.32 Pg. 180

Kevin H. Carracher & Dathleen J. Carracher Doc. #54470919


Timothy DiMichele Trustee Doc. #54592523

8" Iron Bar Fd.

6/H

John & Pat Blawie
88 E. Streetboro St
Hudson, Oh. 44236

Existing House
1/4" = 1'

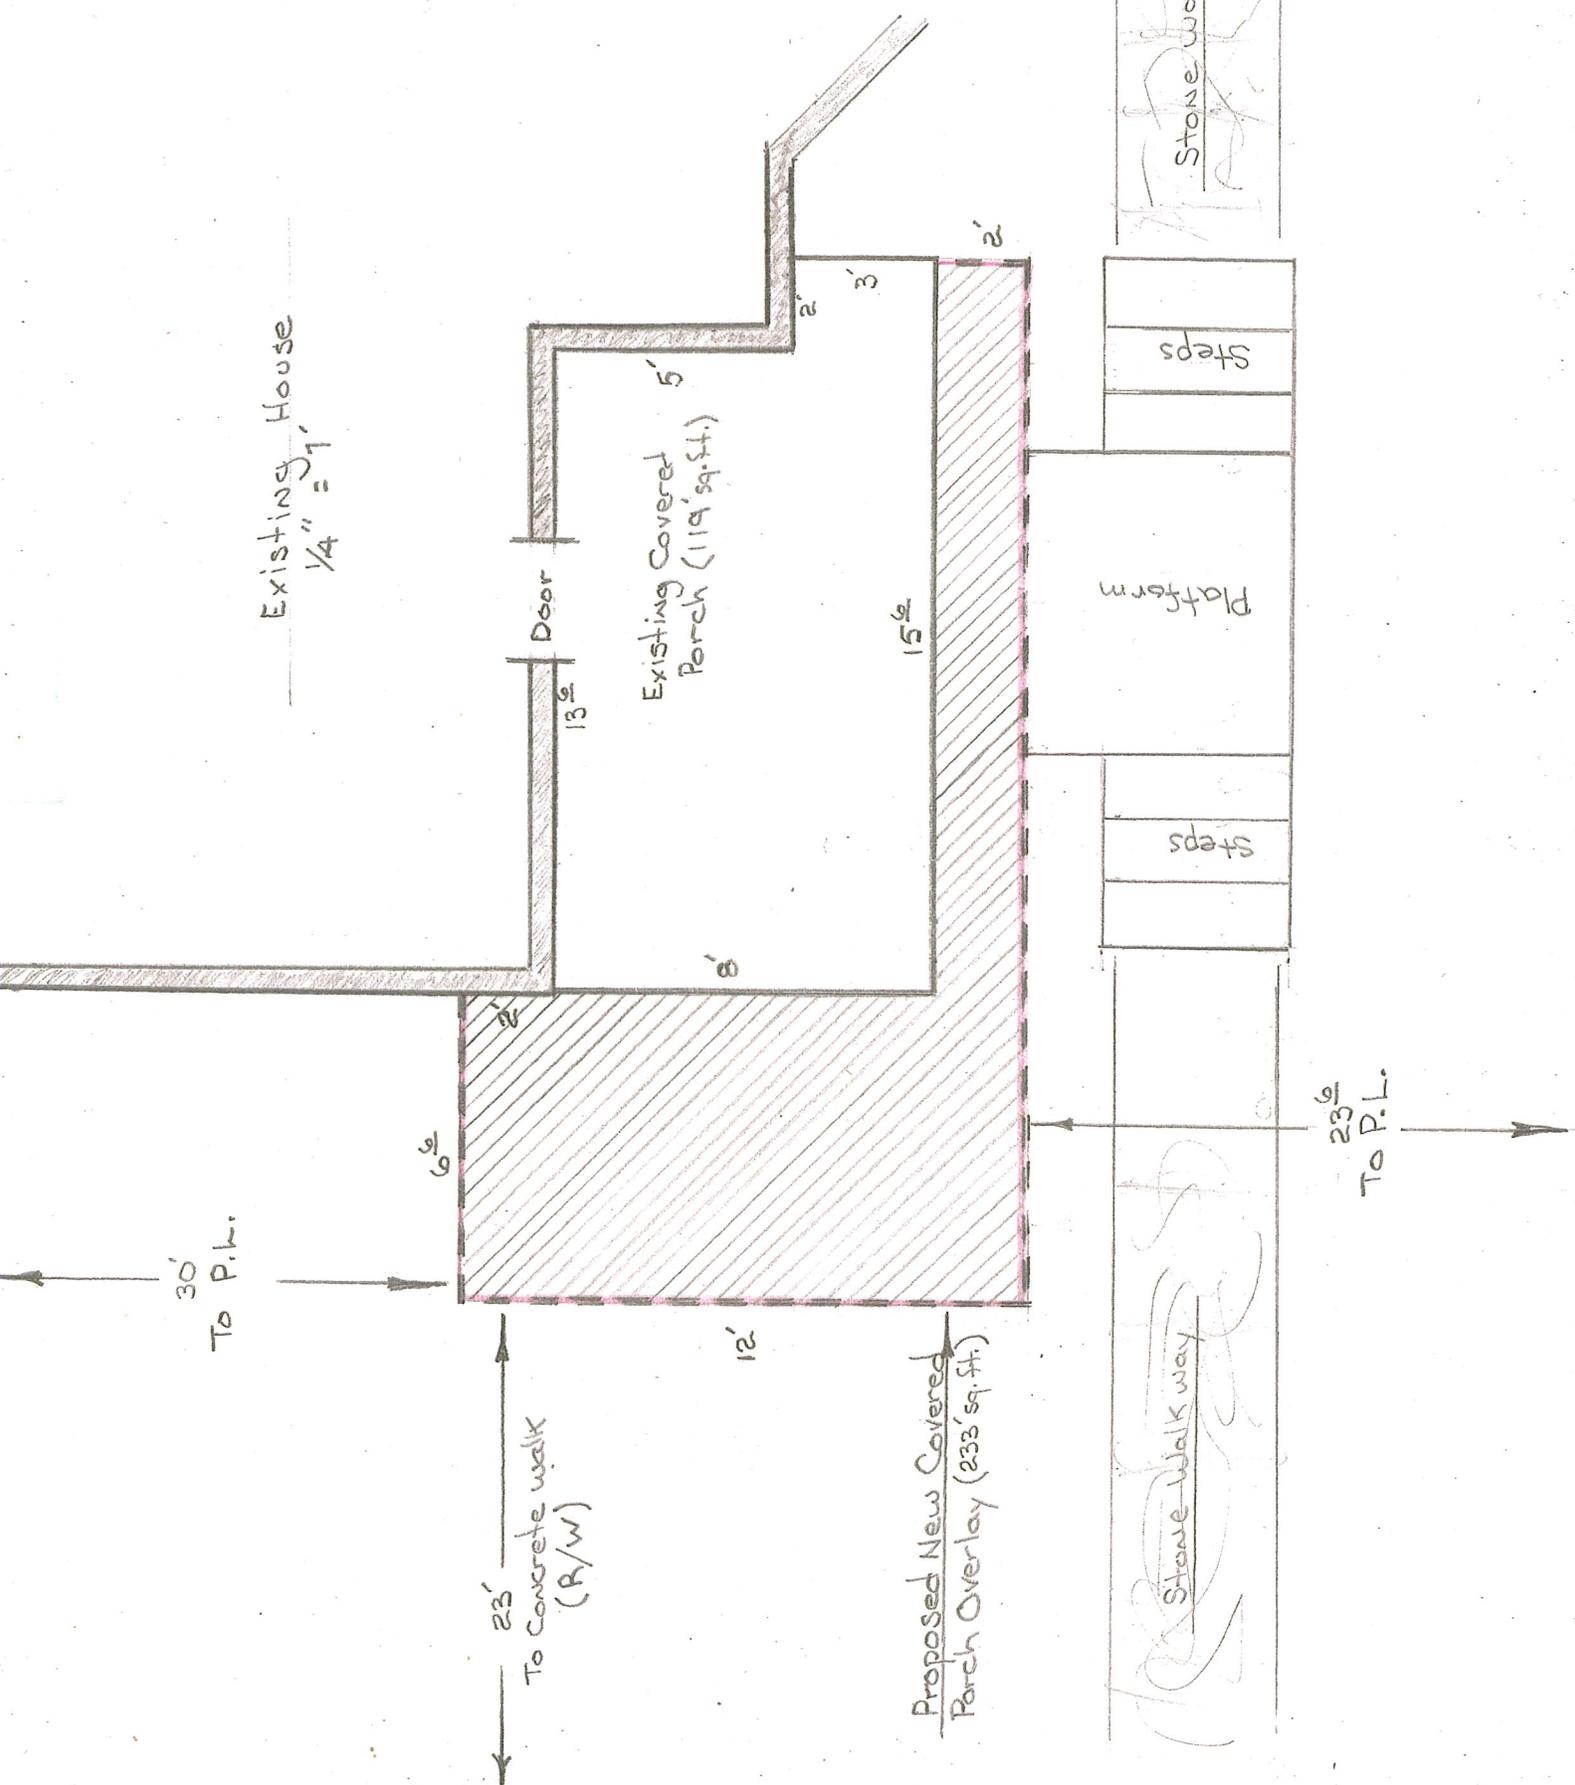

30'
To P.L.

23'
To concrete walk
(R/W)

Proposed New Covered
Porch Overlay (233 sq. ft.)

23'
To P.L.

Platform

Steps

Steps

Stone Walk way

Stone Walk way

WEST ELEVATION
REVISION (08-20-17)

9" Round Tapered Column
Same As Existing

2x6 SPF
Sub-fascia

2x8 SPF #1 Rafters @ 16" O.C.
Shingled Roof to match Existing
4:12

New Continuous Railing
Wooden Railings & Balusters

Rim Joist 2x10 Pre-Treated
Backed w/ 2x8 Pre-Treated

4x4 Pre-Treated
Post (Typical for
Stoop)

New Platform
with Azek Surface

New 10" Lvl x3 Beam

Railing to match Existing
Or more Period (Simpler)
Less Than 4" Between Balusters

2x10 Pre-Treated

2x8

Skirting to
match Existing

Poured Concrete
Footer (Typical)

12" Dia. Hole, Poured
Concrete Min. 9" (Typical)

Porch Area
233' sq. ft

3/8" = 1'

MEASURING UP
LOUIS J. BUCH
8837 OSWALT AVENUE NE
ALLIANCE, OHIO 44601

JOHN & PAT BLANKENSHIP
88 E. STREETSBORO STREET
HUDSON, OHIO 44236-3046

NORTH ELEVATION
REVISION (08-20-17)

2x8 SPF #1 Rafters @.16" O.C.
Shingled to match Existing

2x6 Sub-Fascia

New 10" LVL
x3 Beam

9" Round Tapered Column
Same As Existing

New Continuous Railing
Wooden Railings & Balusters

New Platform with Azek Surface

Railing to match Existing
or Period (Simpler)
Less than 4" between
Balusters

5'
4'

Skirting to match Existing

2x10 Pre-Treated

2x8

Pre-Treated
Step
Step
Step

4x4 Pre-Treated Posts
(Typical for Stoup)

36"

6x6

12" Dia. Hole. Poured
Concrete Min. 9"
(Typical)

6x6


Poured Concrete
Footer

Porch Area
233' sq. ft.

3/8" = 1'

MEASURING UP
LOUIS J. BUCH
8837 OSWALT AVENUE NE
ALLIANCE, OHIO 44601
(330)581-3413

JOHN & PAT BLANKENSHIP
88 E. STREETSBO RO STREET
HUDSON, OHIO 44236-3046

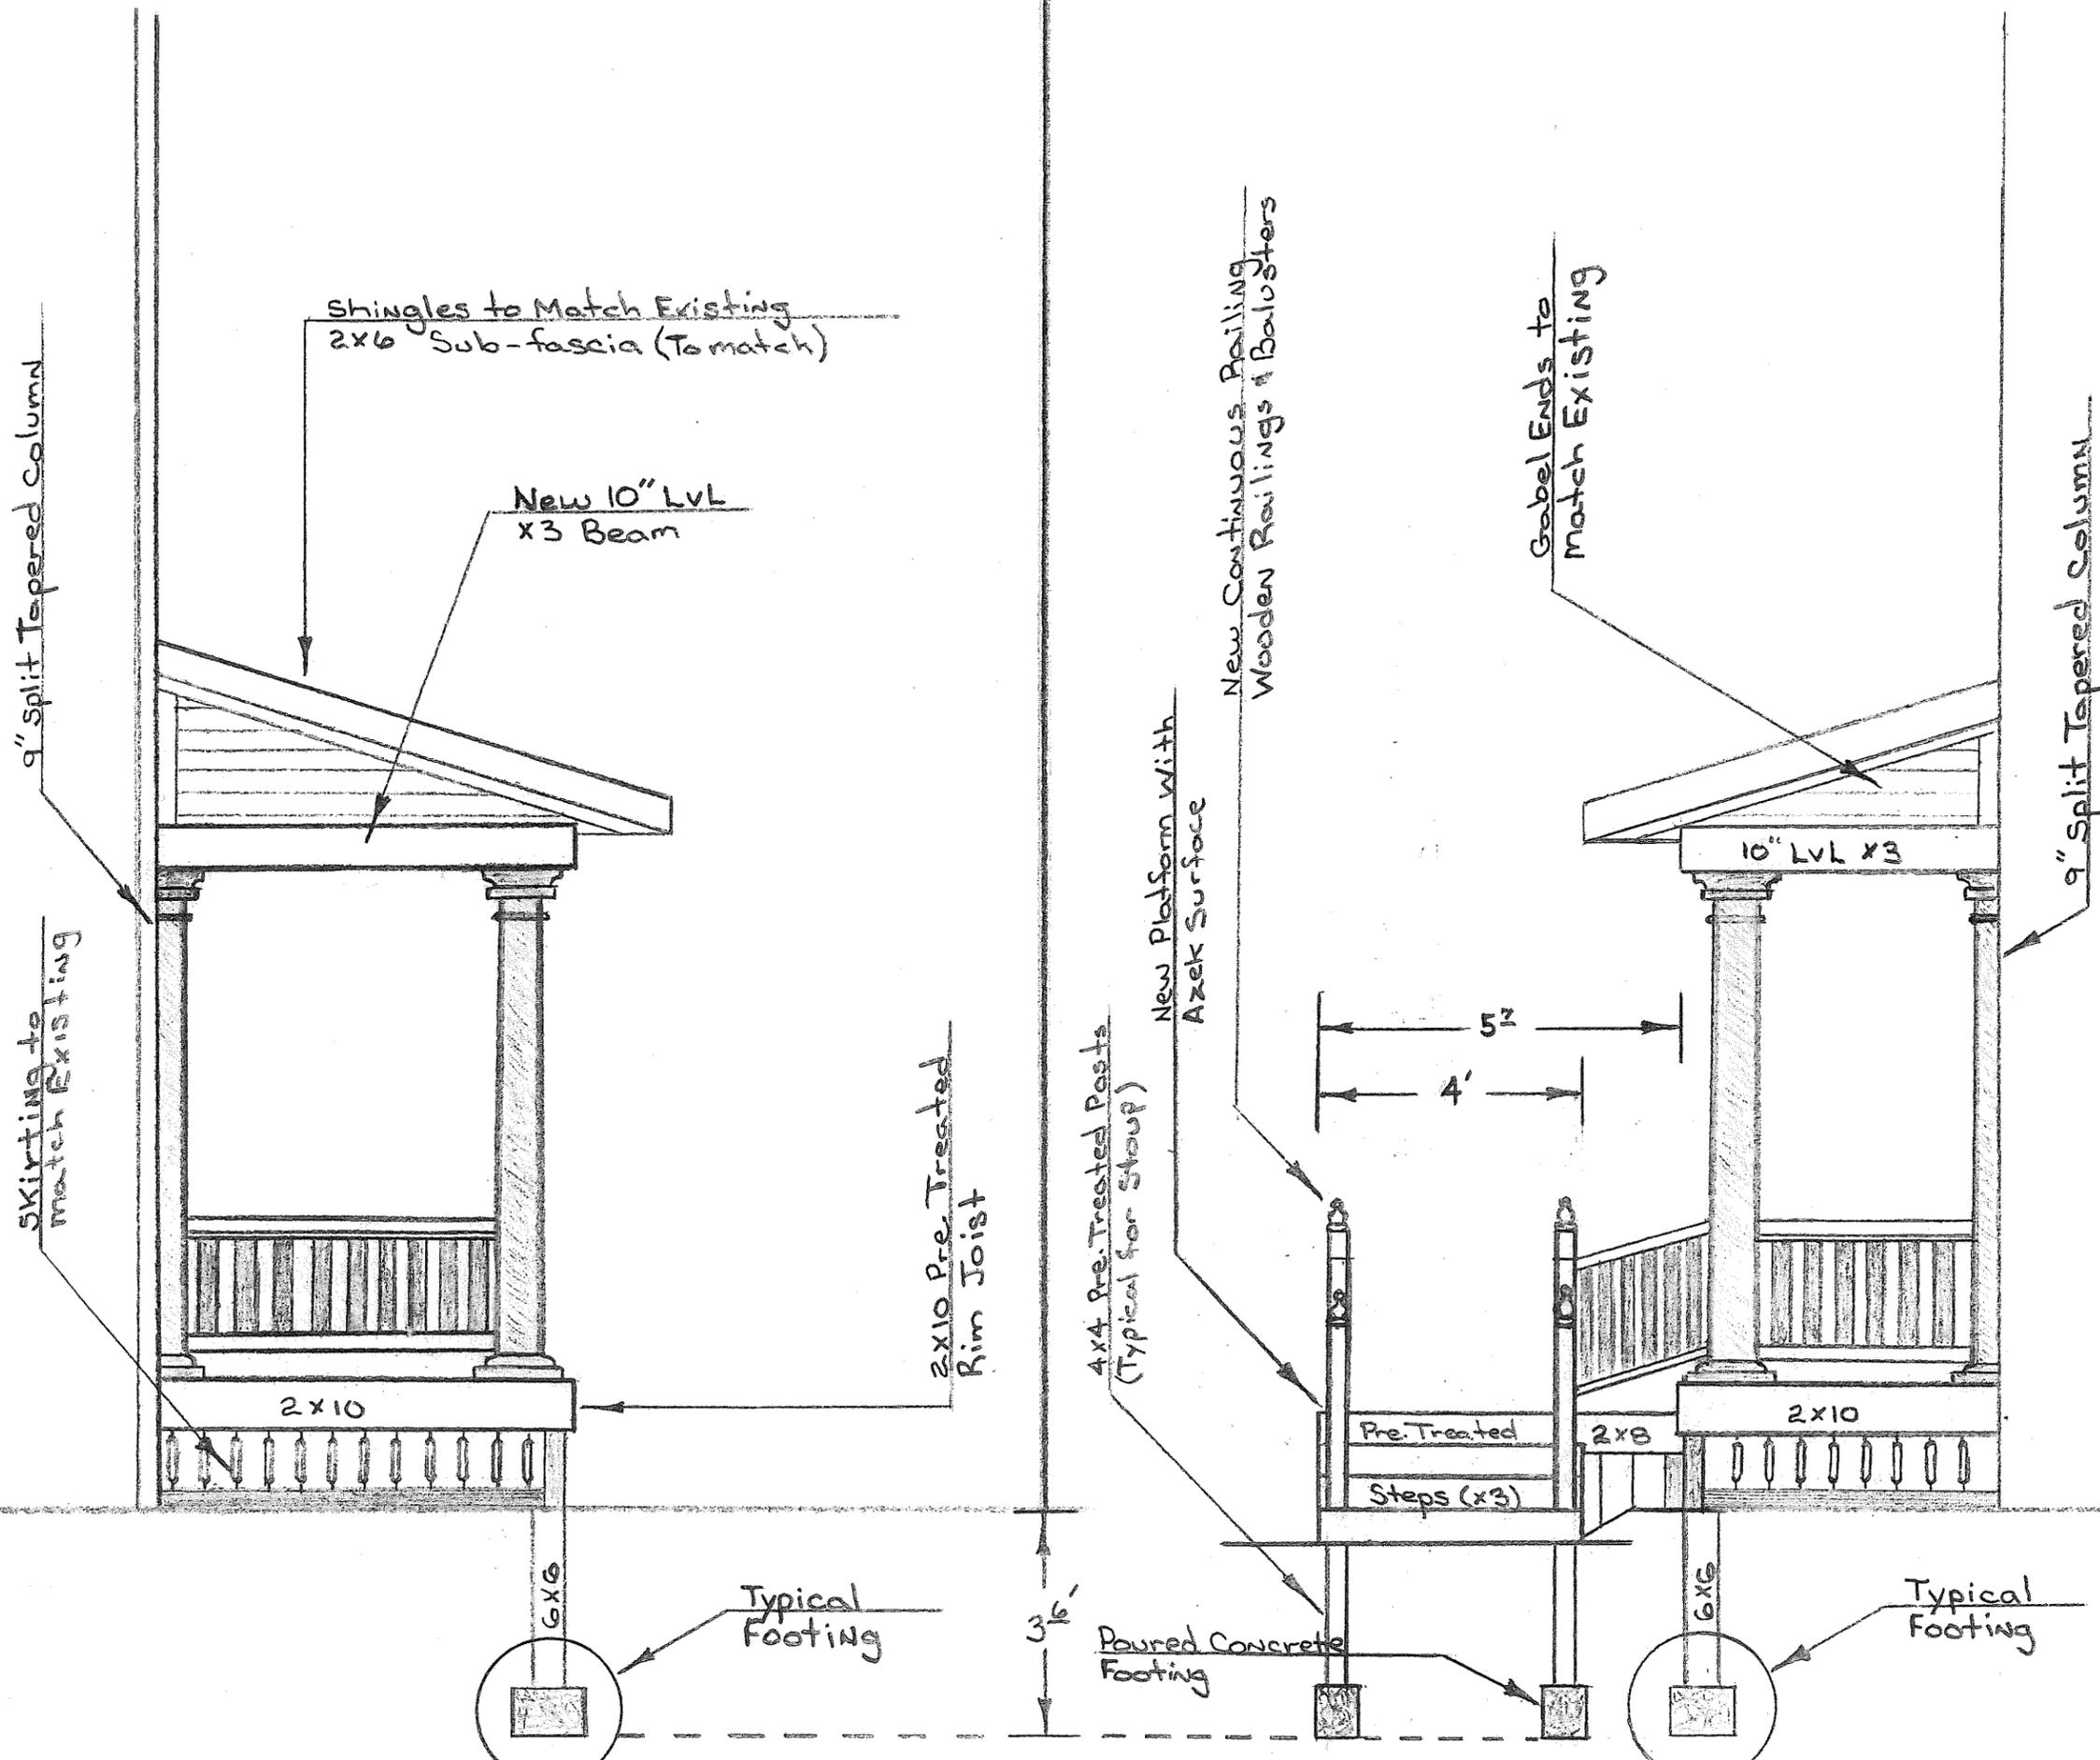


REVISION (08-20-17)

Porch Area
233' sq. ft.

3/8" = 1'

JOHN & PAT BLANKENSHIP
88 E. STREETSBORO STREET
HUDSON, OHIO 44236-3046

MEASURING UP
LOUIS J. BUCH
8837 OSWALT AVENUE NE
ALLIANCE, OHIO 44601
(330)581-3413

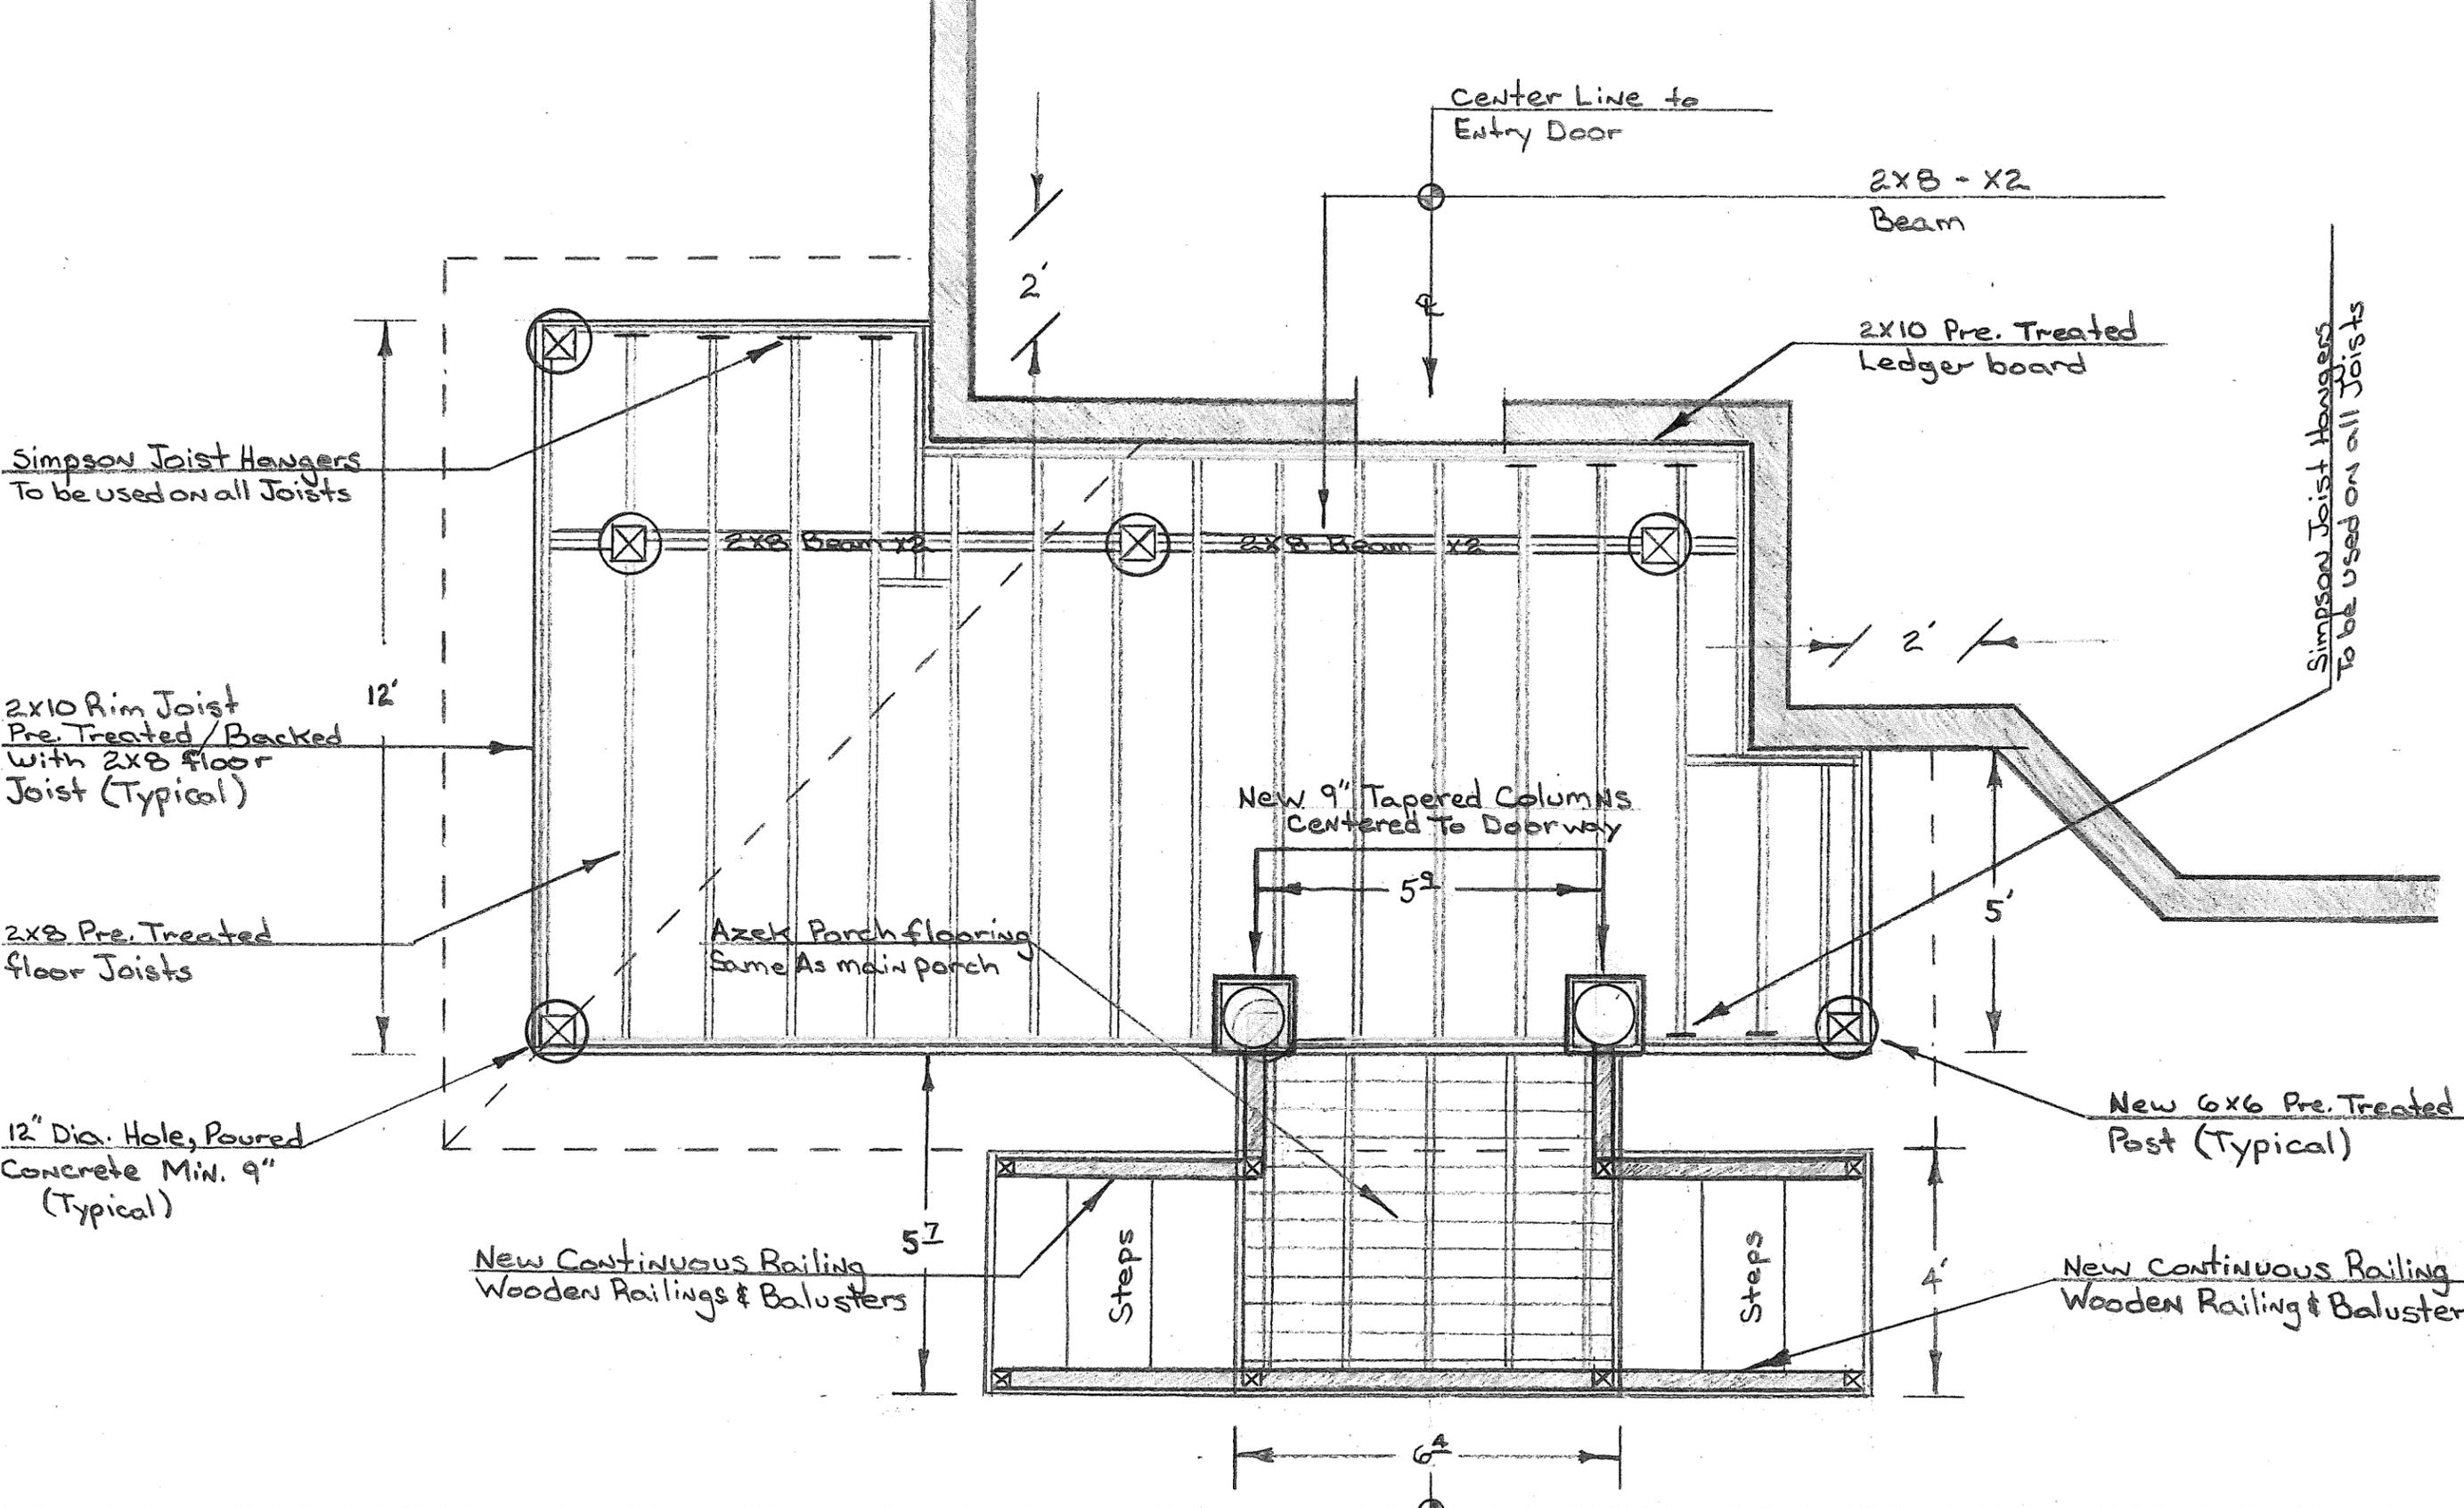

Simpson Joist Hangers
To be used on all Joists

2x10 Rim Joist
Pre-Treated/Backed
With 2x8 floor
Joist (Typical)

2x8 Pre-Treated
floor Joists

12" Dia. Hole, Poured
Concrete Min. 9"
(Typical)

New Continuous Railing
Wooden Railings & Balusters

New 9" Tapered Columns
Centered to Doorway

Steps

Steps

New Continuous Railing
Wooden Railing & Balusters

New 6x6 Pre-Treated
Post (Typical)

2x8 - X2
Beam

2x10 Pre-Treated
Ledger board

Simpson Joist Hangers
To be used on all Joists





Porch Area
233' sq. ft.

FOOTINGS & FLOOR PLAN WITH REVISED STEPS (08-20-17)

3/8" = 1'

MEASURING UP
LOUIS J. BUCH
8837 OSWALT AVENUE NE
ALLIANCE, OHIO 44601
(330)581-3413

JOHN & PAT BLANKENSHIP
88 E. STREETSBORO STREET
HUDSON, OHIO 44236-3046

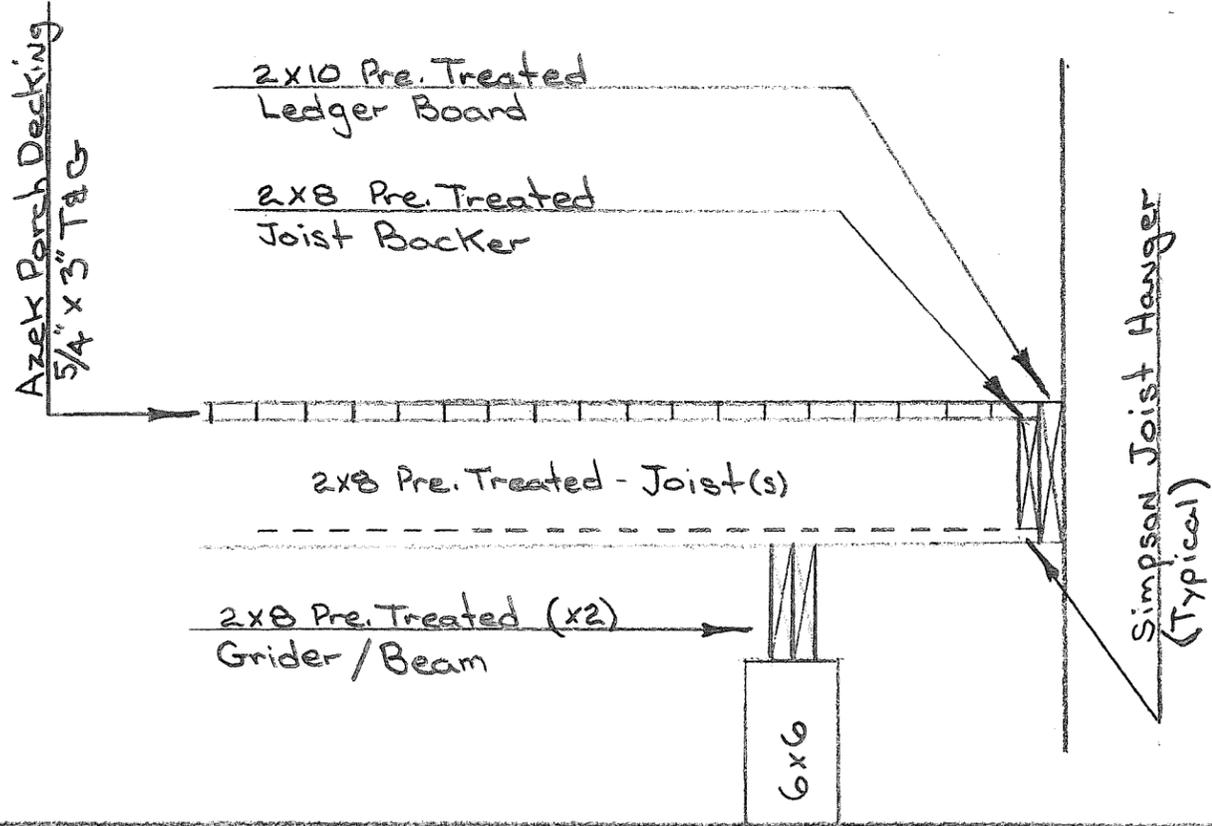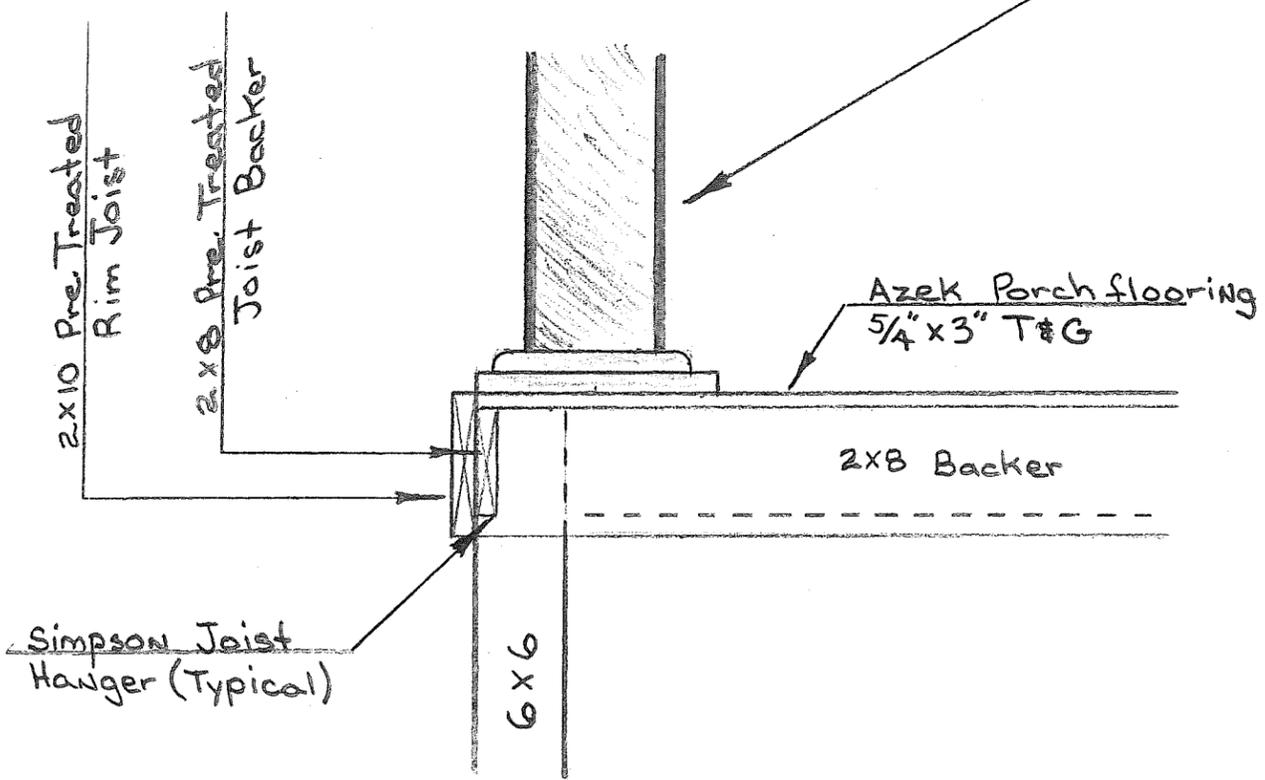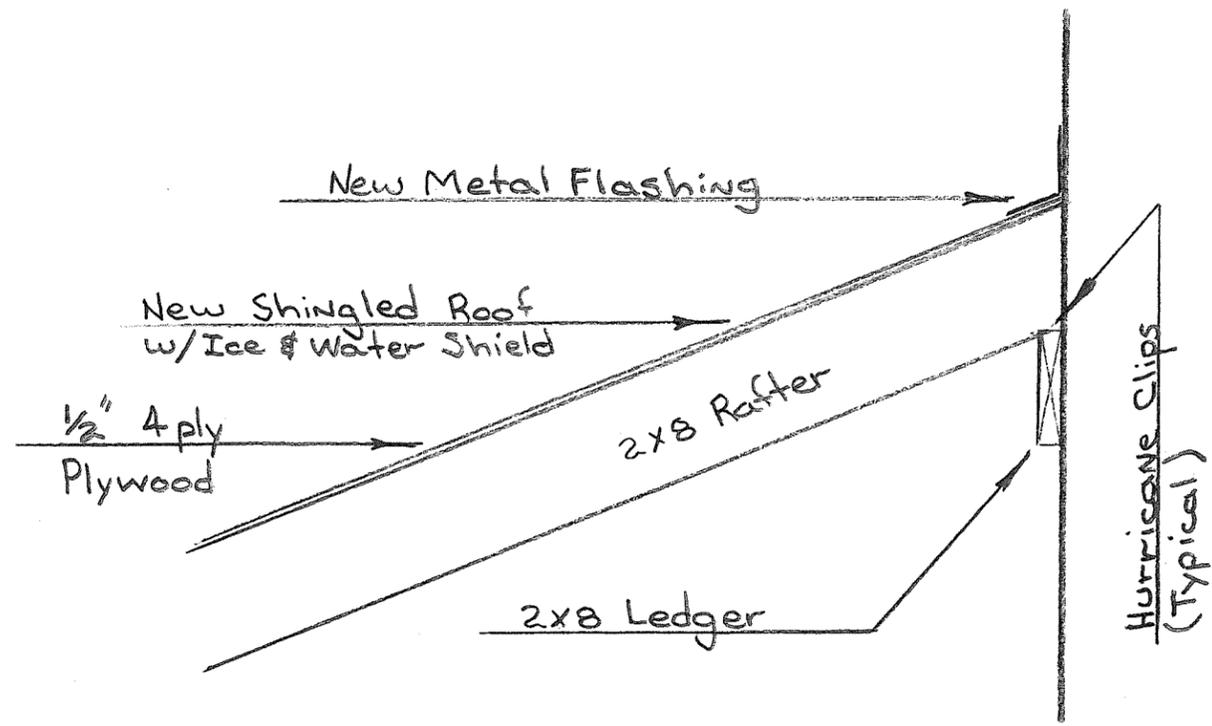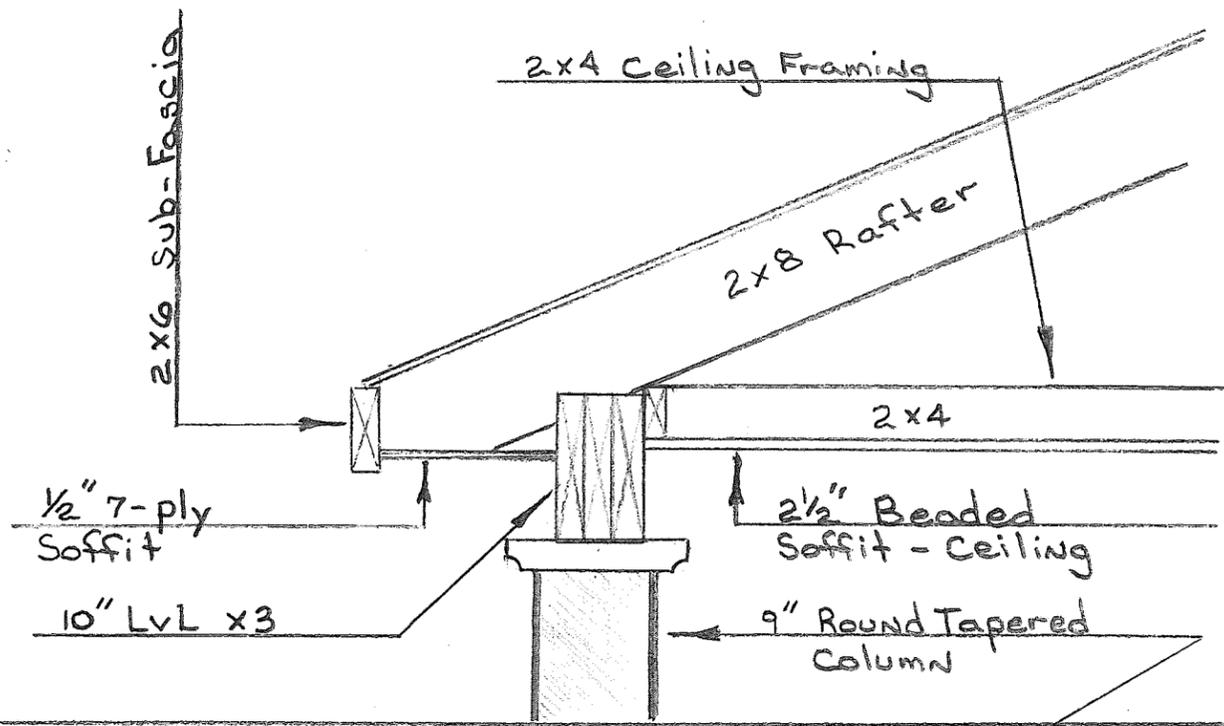

MEASURING UP
 LOUIS J. BUCH
 8837 OSWALT AVENUE NE
 ALLIANCE, OHIO 44601
 (330)581-3413

JOHN & PAT BLANKENSHIP
 88 E. STREETSBORO STREET
 HUDSON, OHIO 44236-3046

1" = 1'